

T8-4FT


**DIMMABLE PC/ALUMINUM
A/C Direct (Ballast Override)**

B37




TECHNICAL SPECIFICATIONS:

- :: T8 LED lamp operates A/C Direct (Ballast override)
- :: Voltage: 90~140V AC input
- :: Rated for use in open fixtures only. Not for use in enclosed fixtures
- :: UL-listed, DLC-rated
- :: Beam Spread: 120°
- :: Base: Fits standard T8 or T12 sockets (G13)
- :: Rated Life: 50,000 hrs, 5-year warranty
- :: Ambient Operating Temperature: 14°F to 80°F
- :: Dimmable
- :: Requires no ballast. Existing ballast must be bypassed and sockets wired directly to line voltage.
- :: Ideal for offices, retail stores, showrooms, and residential applications. Especially suited for areas where accessing the fixture is challenging.
- :: 40 Support Clips & Screws included in a master carton of 20 pieces.

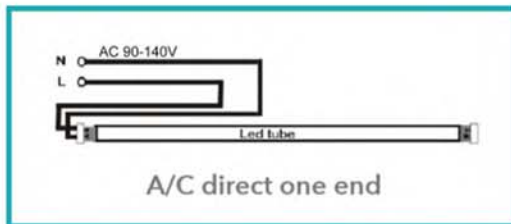

(T8 4ft. wiring diagram)

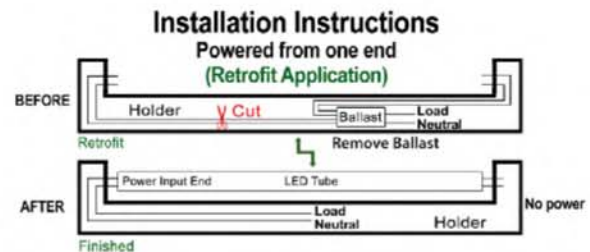

(T8 4ft. wiring diagram)

4FT. LED T8 PLASTIC TUBE LAMPS

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	CHIP	FINISH	LENGTH
T8-4FT-18W-35K-D-F	18W	1900LM	3500K	132 SMS2835	Frosted	4FT.
T8-4FT-18W-40K-D-F	18W	2150LM	4000K	132 SMS2835	Frosted	
T8-4FT-18W-50K-D-F	18W	2150LM	5000K	132 SMS2835	Frosted	
T8-4FT-18W-50K-D-C	18W	2150LM	5000K	132 SMS2835	Clear	