


JOB NAME: _____

DATE: _____


TYPE: _____

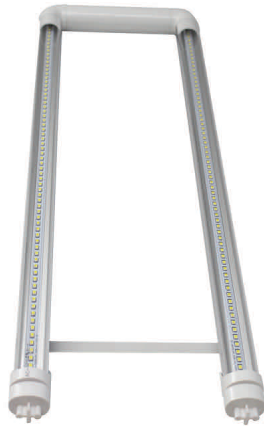

Requires no ballast



T8 LED lamp fits into standard 2' x 2' fixtures that utilize a U6 T8 lamp.

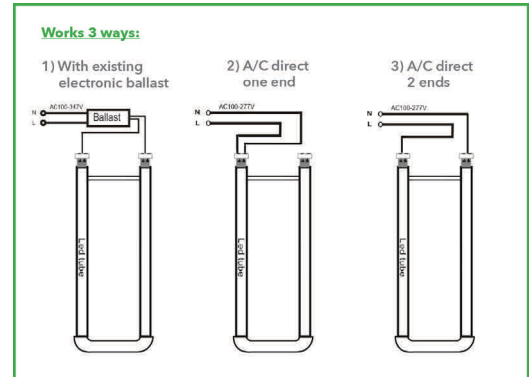

T8-EZ3-U2F-15W-32K
T8-EZ3-U2F-15W-41K
T8-EZ3-U2F-15W-50K

Ballast Compatible or AC Direct

Avoid initial labor cost by replacing the fluorescent tube with this compatible tube. Once fluorescent ballast fails, there is no need to install a new ballast. This tube can simply work with direct A/C power. Ideal for offices, showrooms, refrigerators, cover lighting, etc.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120 –277 volts AC input, 347V with ballast
- Wattage: 15W
- U6 T-8 LED lamp operates on line voltage without a ballast, sockets wired to line voltage, one end or both ends or with electronic ballast.

LIGHTING SPECIFICATIONS:

- CRI: 80
- Beam spread: 120°
- Base: fits standard T-8
- Color temperature: day light (DL = 5000K), natural white (NW = 4100K), warm white (WW = 3200K)
- Rated life: 50,000 hours
- Ambient operating temperature: -10°C to 30°C
- Dimmable: not dimmable

WARRANTY:

- Five-year warranty

MODEL NO.	CHIP	WATT	LUMENS	COLOR TEMP
T8-U2F-15W-32K	72 SMD2835	15W	1410	WW 3200K
T8-U2F-15W-41K	72 SMD2835	15W	1450	NW 4100K
T8-U2F-15W-50K	72 SMD2835	15W	1500	DL 5000K

SPECIAL FEATURES:

- Rated for use in open fixture. Not for use in enclosed fixtures with a lens
- Heat sink: 6063 extruded aluminum with heat dissipation ribs for superior thermal management

CERTIFICATIONS:

- UL-listed, DLC

WARNING:

- Must be used with electronic instant start ballast, or direct A/C
- Risk of electric shock if power is not off during installation
- Disconnect immediately if you hear fuzzing or see flickering
- Some electronic ballast may not be compatible test before major installations

