

# T8-U2F

A/C Direct or Ballast Compatible LED U-Tube



## TECHNICAL SPECIFICATIONS:

- :: U6 T8 LED lamp operates on line voltage without a ballast, sockets wired to line voltage, or with electronic ballast
- :: Voltage: 120~277V AC input
- :: Heat sink: 6063 extruded aluminum with heat dissipation ribs for superior thermal management
- :: Beam Spread: 120°
- :: Base: Fits standard T8 (G13) wired directly to line voltage (120 or 277V AC) or with existing electronic ballast
- :: Rated Life: 50,000 hrs, 5-year warranty
- :: Ambient Operating Temperature: 14°F to 80°F
- :: Not dimmable (dimmable version available by special order)


## APPLICATIONS:

- :: Ideal for offices, retail stores, showrooms and residential applications. Especially suited for areas where accessing the fixture is challenging.



B34

### Works 3 ways:

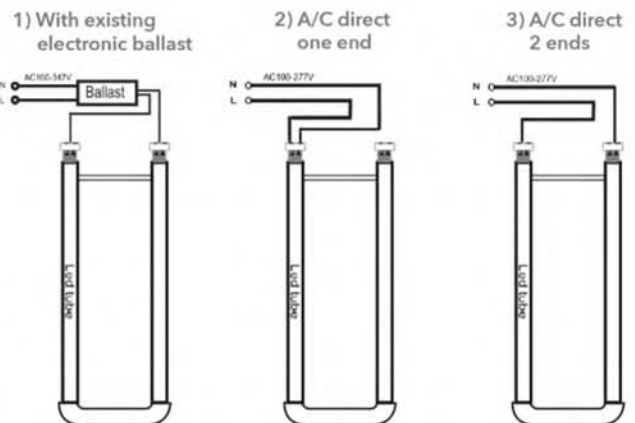

## LED U-SHAPED T8 PLASTIC / ALUMINUM TUBE LAMPS

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	CHIP	LENGTH
T8-U2F-EZ3-15W-32K	15W	1410LM	3500K	72 SMD2835	<b>2FT.</b>
T8-U2F-EZ3-15W-41K	15W	1450LM	4100K	72 SMD2835	
T8-U2F-EZ3-15W-50K	15W	1500LM	5000K	72 SMD2835	