WLL SERIES LANDSCAPE LIGHTING



WLL-181-30K-BK

INTEGRATED LED WELL LIGHT





The fixture has classic traditional appearance, professional light distribution design, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

eatures

- **Die-cast Aluminum Housing**
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency

Technical Specifications

Electrical:


- Voltage: 12-24V AC/DC •
- Power Factor: >0.9
- Wattage: 6W •
- Input current: 1A Max
- Efficacy: 96LPW

Mechanical:

- **Die-cast Aluminum Housing**
- Optical PC Flat Lens with 1-3/4" Shroud Suitable for • Wall Wash & Tree Lighting
- 3" PVC Sleeve with three 1/2" KO. 2 on sides, 1 on • bottom
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- IP Rating: IP65
- Operating Temperature: -4°F to 104°F
- Suitable for Wet Locations
- 1-Year Warranty

Other Models:

6W | 580LM | WLL-105-30K-BK • 6W | 500LM | WLL-106-30K-BK • 6W | 500LM | WLL-157-30K-BK • 6W | 400LM | WLL-159-30K-BK





Optical PC Flat Lens with 1-3/4" Shroud Suitable for Wall Wash & Tree Lighting

Lighting:

- LED: Built in integrated LED
- Total lumens: 580LM
- Color Temperatures: 3000K
- Color Rendering Index: $CRI \ge 90$
- Beam Angle: 52°
- Lifespan: 50,000 Hrs.

Applications:


The fixture has classic traditional appearance, professional light distribution design, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations







LED: Built in integrated LED

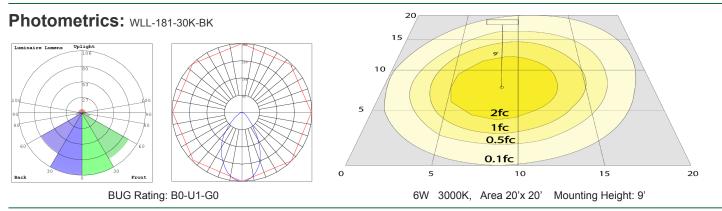

Other Views:



Performance Table: WLL-181-30K-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WLL-181-30K-BK	6W	12-24V	580LM	3000K	B0-U1-G0	96



LSWN2 = Box of 24, Waterproof Wire Connectors, For Up to Three 12-2 Cables LSWN2-100 = Jar of 100, Waterproof Wire Connectors, For Up To Three 12-2 Cables

Example:

1. WLL-159-30K-BK

(FOR WLL 6W 30K FIXTURE 12-24V)





Top View



Bottom View

WESTGATE

Phone: (877) 805-2252 | Fax: (877) 805-2252 www.westgatemfg.com

