


4" LED Outdoor Cylinder Lights

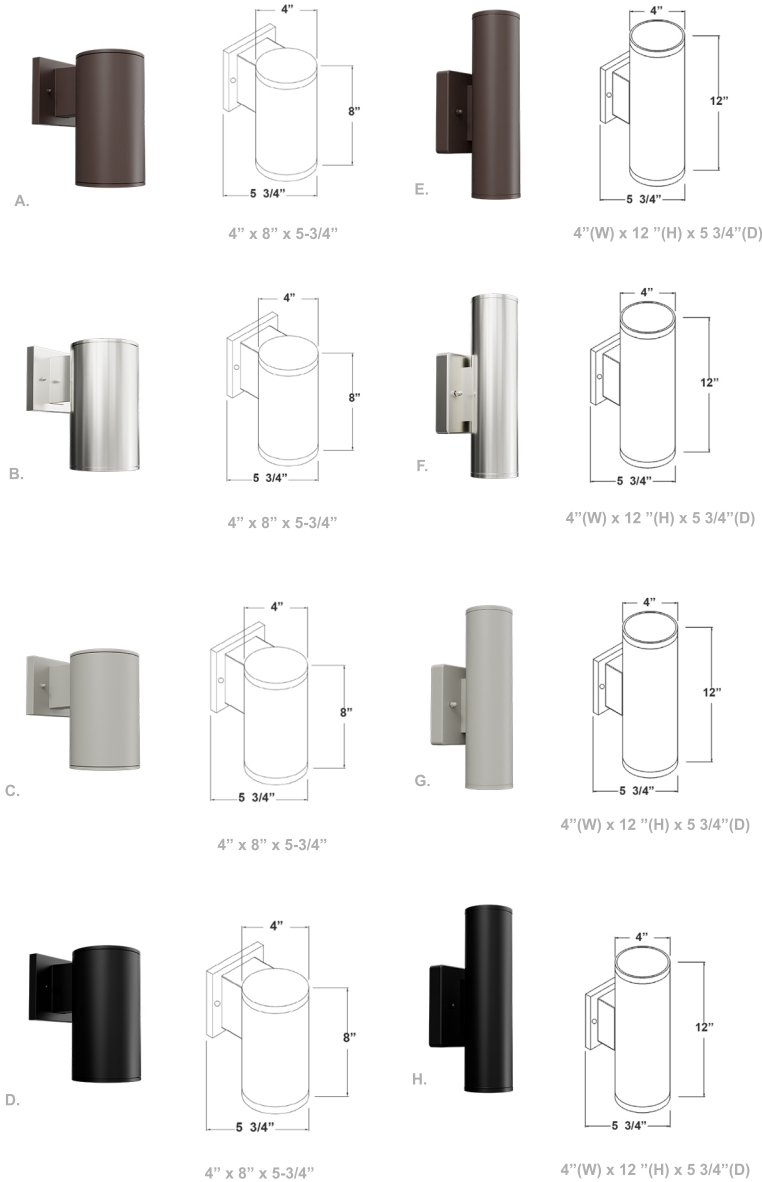

Wattage

15W (Down Light)
30W (Up/Down Light, 15W per end)

Voltage Input

120V AC

Dimmable

TRIAC Dimming (Using Standard TRIAC LED Dimmers)




Finish

Die-Cast Aluminum & Glass

Beam Angles

 45° Each Side

Color Temperatures

 3000K  4000K  5000K

Features



Catalog No.	Fig.	Catalog No.	Fig.
WMC-DL-MCT-BR-DT	A	WMC-UDL-MCT-BR-DT	E
WMC-DL-MCT-BN-DT	B	WMC-UDL-MCT-BN-DT	F
WMC-DL-MCT-WH-DT	C	WMC-UDL-MCT-WH-DT	G
WMC-DL-MCT-BK-DT	D	WMC-UDL-MCT-BK-DT	H

Factory-Installed Options

Watts	EM Options	Description	Photocell	Description	Paint	Sensor	Description
2" & 3"	OPT-EM-FM10D	EXTERNAL BACK BOX	OPT-PC-B	BUTTON	N/A	OPT-SEN-WMC	PROGRAMMABLE MICROWAVE (B/LEVEL)
4" & UP	OPT-EM-FM2INT	INTERNAL	277V Option	Description	N/A	WEC-8RC	OPTIONAL REMOTE CONTROL
			OPT-277V	INTERNAL ONLY FOR WMC-DL-UDL			