


6" LED Outdoor Cylinder Lights

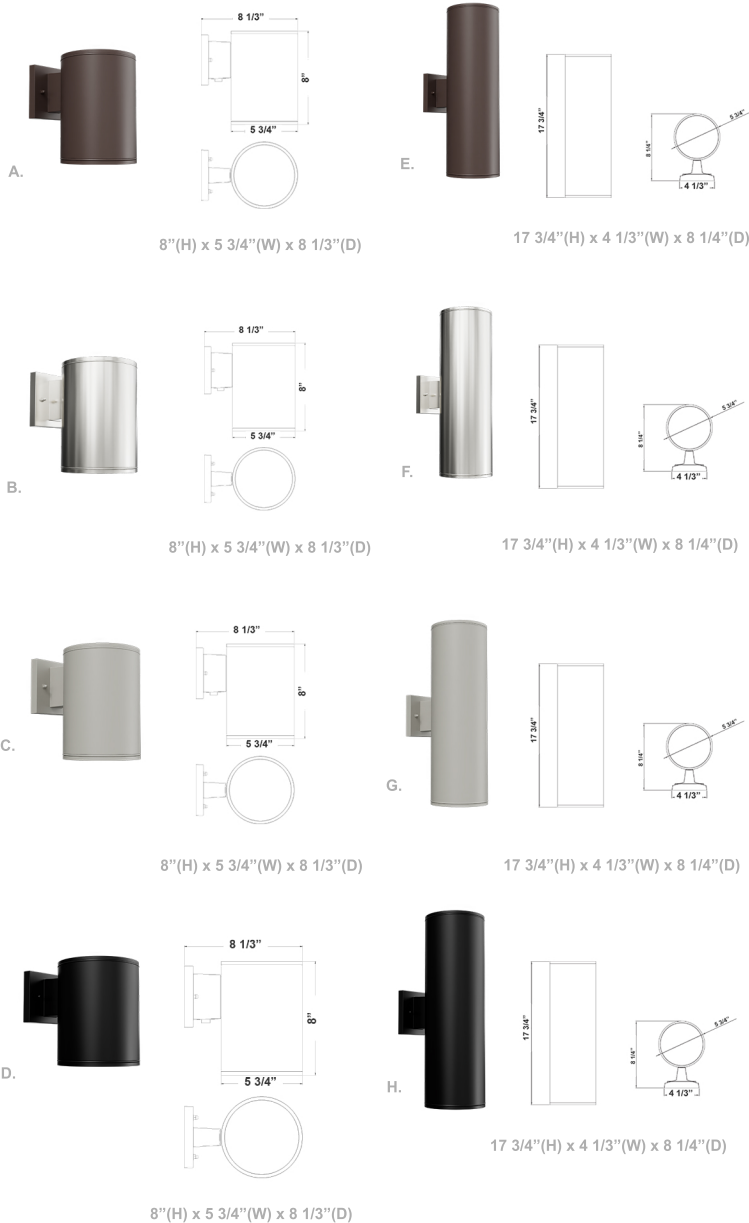

Wattage

20W / 40W

Voltage Input

120-277V AC

Dimmable

TRIAC Dimming (Using Standard TRIAC LED Dimmers)


Finish

Die-Cast Aluminum & Glass

Beam Angles



Color Temperatures



Features



Catalog No.	Fig.	Catalog No.	Fig.
WMCL-DL-MCT-BR	A	WMCL-U DL-MCT-BR	E
WMCL-DL-MCT-BN	B	WMCL-U DL-MCT-BN	F
WMCL-DL-MCT-WH	C	WMCL-U DL-MCT-WH	G
WMCL-DL-MCT-BK	D	WMCL-U DL-MCT-BK	H

Factory-Installed Options

Watts	EM Options	Description	Photocell	Description	Paint	Sensor	Description
2" & 3"	OPT-EM-FM10D	EXTERNAL BACK BOX	OPT-PC-B	BUTTON	N/A	OPT-SEN-WMC	PROGRAMMABLE MICROWAVE (BI-LEVEL)
4" & UP	OPT-EM-FM2INT	INTERNAL	277V Option	Description	N/A	WEC-8RC	OPTIONAL REMOTE CONTROL
			OPT-277V	(INTERNAL ONLY FOR WMCL-DL)			