
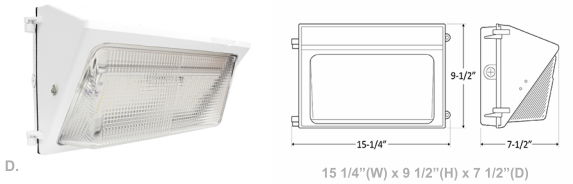
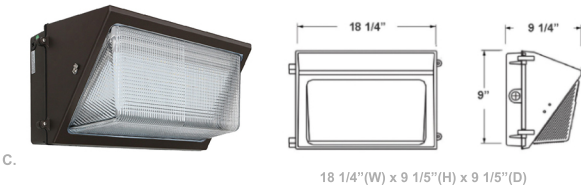
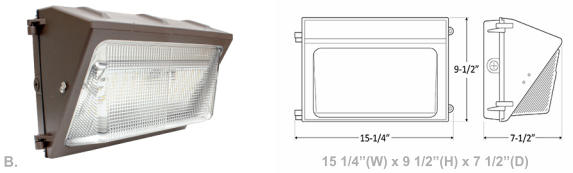


Glass Lens Traditional Wall Pack

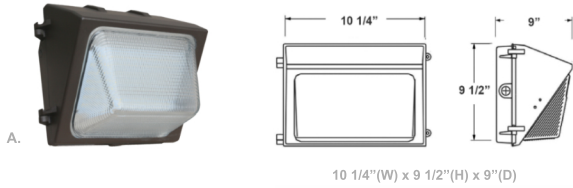

Wattage

15W / 20W / 25W / 30W / 40W / 50W / 80W / 100W / 120W

Voltage Input

120-277V AC 50/60Hz

Input Current

0.35A / 0.64A / 1.0A / 1.4A

Efficacy

110 LPW / 130 LPW


Dimming

0~10V Dimmable

Finish

ADC12 Aluminum Heat Sink / Outdoor Powder Coating
Dark Bronze / White

Color Temperatures

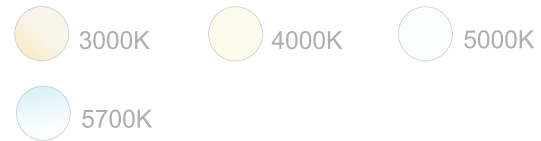

Features



Accessories



Catalog No.	Fig.	Catalog No.	Fig.	Catalog No.	Fig.	Catalog No.	Fig.	Catalog No.	Fig.
WMX-SM-15-30W-30K	A	WMX-MD-20-50W-40K	B	WMX-MD-20-80W-50K	B	WMXPRO-SM-15-30W-MCTP	A	WMX-MCTP-D	B
WMX-SM-15-30W-40K	A	WMX-MD-20-50W-50K	B	WMX-LG-50-120W-30K	B	WMXPRO-MD-20-80W-MCTP	B	WMX-MCTP-D-WH	B
WMX-SM-15-30W-50K	A	WMX-MD-20-80W-30K	B	WMX-LG-50-120W-40K	B	WMXPRO-MD-20-80W-MCTP	B		
WMX-MD-20-50W-30K	B	WMX-MD-20-80W-40K	B	WMX-LG-50-120W-50K	B	WMXPRO-LG-50-120W-MCTP	C		

Factory-Installed Options

Watts	EM Options	Description	Protocol	Description	Paint	Sensor	Description
30W	OPT-EM-OD1EXT	EXTERNAL BOX	OPT-PC-B	BUTTON	OPT-CLR-85(BK/GR/SR/WH)	OPT-SEN-3MRLV-5	PROGRAMMABLE MICROWAVE (H/L/LEVEL)
50W/60W	OPT-EM-OD3INT	INTERNAL	OPT-PC-B	BUTTON	OPT-CLR-85(BK/GR/SR/WH)	OPT-SEN-3MRLV-5	PROGRAMMABLE MICROWAVE (H/L/LEVEL)
80W/120W-LG	OPT-EM-OD3INT	INTERNAL	OPT-PC-B	BUTTON	OPT-CLR-85(BK/GR/SR/WH)	WEC-8RC	REMOTE CONTROL
	Vandal Res.	Descriptions			480 V Option		Description
	OPT-TRS-T20	tamper resistant cover			OPT-WP-480V		CHANGE VOLTAGE