
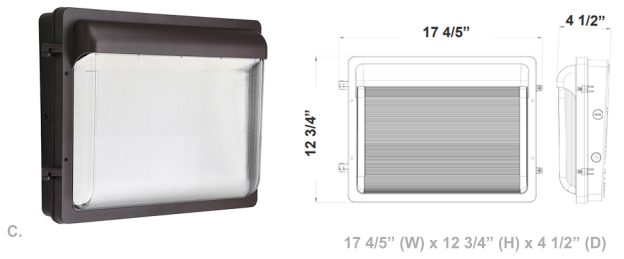
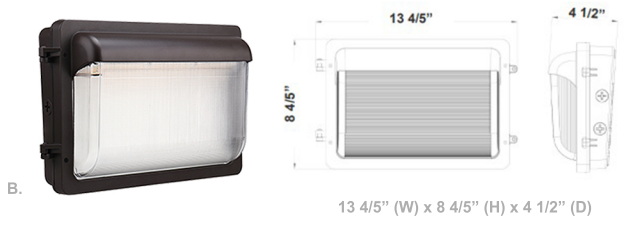


Flat Wall Pack

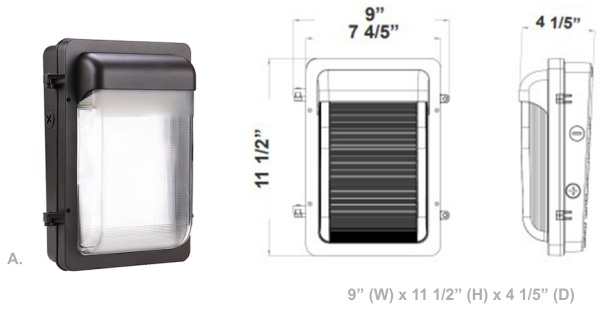

Wattage

15W / 20W / 25W / 30W / 40W / 60W / 80W
100W / 120W

Voltage Input

120-277V AC 60Hz

Efficacy

130 LPW

Dimming

0~10V Dimmable


Finish

Die-Cast Aluminum with Powder Coat Finish

Beam Angles



Color Temperatures



Features



Catalog No.	Fig.
WPFX-SM-15-40W-MCTP-P	A.
WPFX-MD-20-40W-MCTP-P	B.
WPFX-MD-40-80W-MCTP-P	B.
WPFX-LG-80-120W-MCTP-P	C.