



ASSEMBLAGGIO DEL FISCHIETTO

Before installing the whistle, you must straighten the 2 tabs, using a pair of pliers. After placing the whistle and inserting the spring, set the pin and beat with decisive blows the head of the new pin.

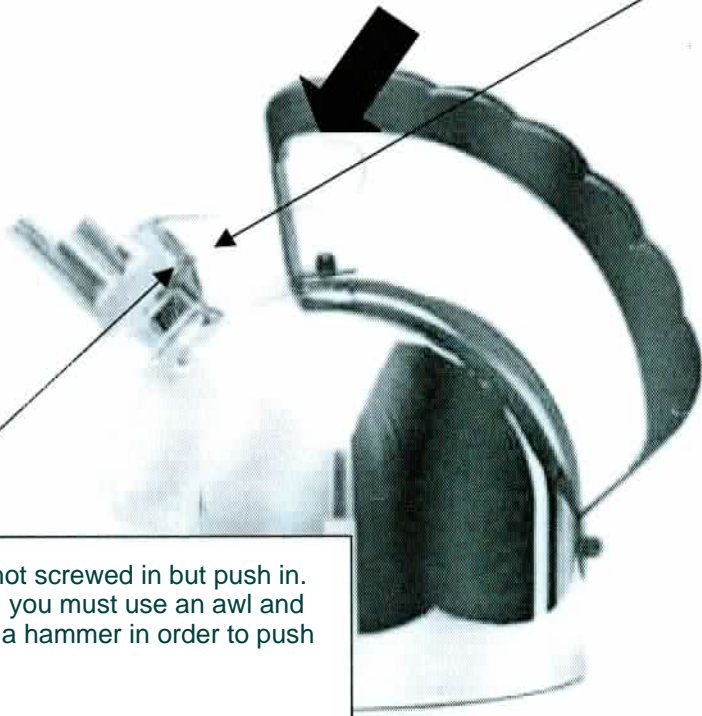

The pin is not screwed in but push in. To remove, you must use an awl and beat it with a hammer in order to push out the pin.

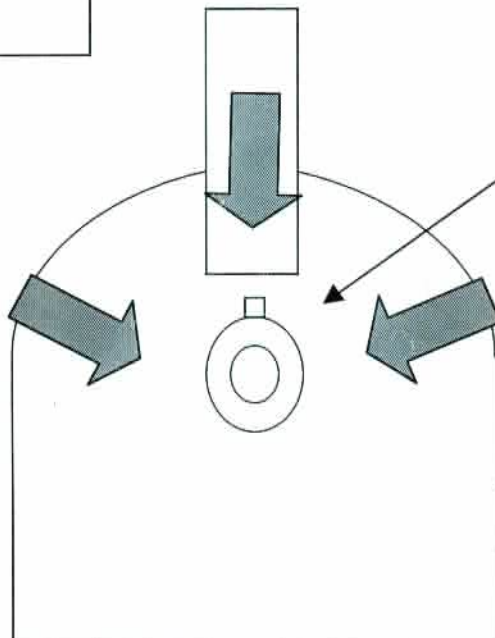

To improve the fit between the whistle and kettle, use a rubber hammer and hit the whistle as indicated by the arrows, depending on the need.