


# Calipso Wall



# Technical Data

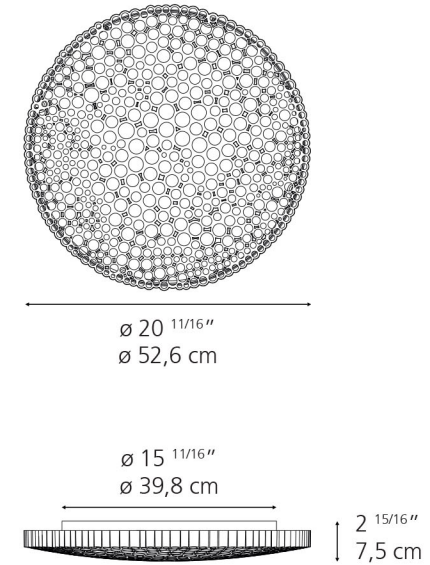

<b>MATERIALS</b>	Louver in ASA. Fractal shape of impure geometry.
<b>EMISSION</b>	Direct
<b>LIGHT SOURCE</b>	LED 49.8W 2700K >90CRI or 49.8W 3000K >90CRI
<b>DIMMING FEATURE</b>	Driver is compatible to both 2-wire Dimming and 0-10V dimming options
<b>DELIVERED LUMENS</b>	2884lm
<b>FINISH</b>	○ White
<b>CERTIFICATIONS</b>	c.UL.us listed, IP20, ADA

