

Tolomeo micro LED wall w/ S bracket aluminum

SPECIFICATIONS

TOL1141



Design By

Michele De Lucchi
Giancarlo Fassina

Collection

Design



Specifications

Delivered lumens	231lm
Light output ratio	38.5lm/W
Power consumption	6W
Led type	5W Array*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>80
Life expectancy	50000Hrs
Control type	DIMMABLE (On Cord)
Input Voltage	120-240V
Driver	Plug-In

Colors & Finishes

Aluminum


Materials

- Arms and diffuser in aluminum
- Joints and tension control knobs in polished die-cast aluminum
- Tension cables in stainless steel
- S-Bracket in polished die-cast aluminum

Features & Accessories

- Fully adjustable, articulated arm structure
- Tilttable and rotatable diffuser (90 degrees in both directions)

Dimensions

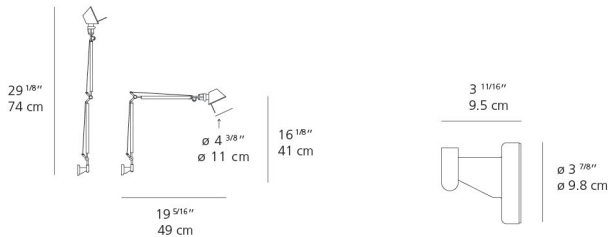

Packaging


2 Boxes

1 x 8-3/8" x 8-3/8" x 20-3/16" / 2.28 lbs - 21 cm x 21 cm x 51 cm / 1.036 kg

1 x 4-7/16" x 4-7/16" x 4-7/16" / .55 lbs - 11 cm x 11 cm x 11 cm / .25 kg

Light distribution

Direct/Indirect



Red = Max Cd. Through Vertical plane

Blue = Max Cd. Through Horizontal plane

Luminaire weight

1.47 lbs / .67 kg

Warranty

5 year limited warranty



AMUSEPOT.COM
702.857.8212