
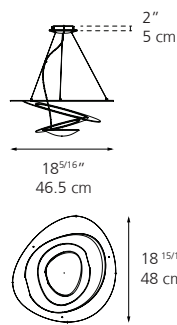
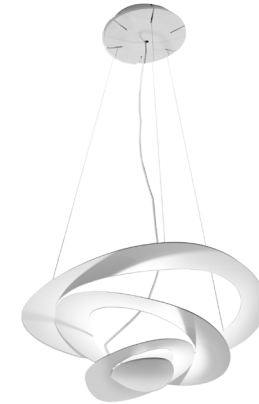



Pirce Suspension

Technical data

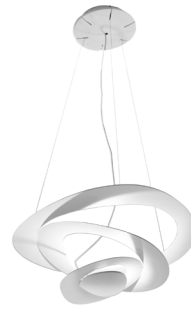


Standard length
 Min. 19^{3/4"} - Max. 84"
 Min. 50 cm - Max. 213.4 cm

Extended length
 Min. 19^{3/4"} - Max. 216"
 Min. 50 cm - Max. 548 cm

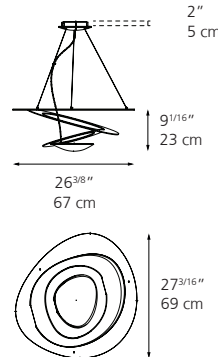

Standard length
 Min. 19^{3/4"} - Max. 84"
 Min. 50 cm - Max. 213.4 cm

Extended length
 Min. 19^{3/4"} - Max. 216"
 Min. 50 cm - Max. 548 cm

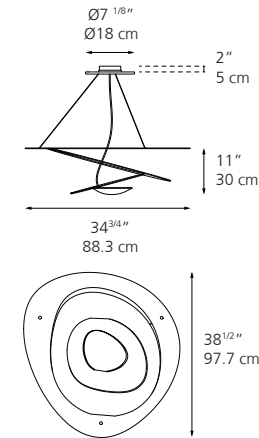

Standard length
 Min. 19^{3/4"} - Max. 84"
 Min. 50 cm - Max. 213.4 cm

Extended length
 Min. 19^{3/4"} - Max. 216"
 Min. 50 cm - Max. 548 cm

PIRCE MICRO

PIRCE MINI

PIRCE

| | PIRCE MICRO | PIRCE MINI | PIRCE |
|------------------------|---|---|---|
| MATERIALS | Flexible painted steel structure, covered with a natural anti-yellowing silicone case | Flexible painted steel structure, covered with a natural anti-yellowing silicone case | Flexible painted steel structure, covered with a natural anti-yellowing silicone case |
| EMISSION | Indirect | Indirect | Indirect |
| LIGHT SOURCE | LED 28W 2700K > 90CRI or LED 28W 3000K > 80CRI | LED 28W 2700K > 90CRI or LED 28W 3000K > 93CRI | LED 28W 2700K > 90CRI or LED 28W 3000K > 93CRI |
| DIMMING FEATURE | Dimmable | Dimmable | Dimmable |
| FINISH | ○ White ● Gold | ○ White ● Gold | ○ White ● Gold |
| CERTIFICATIONS | c.UL.us listed | c.UL.us listed | c.UL.us listed |

