

# Raingler

## NETS & GRIPS

### 2012 - Newer Jeep Grand Cherokee Ceiling Net Installation

**NOTE:** Many newer models have B-pillar handles and even overhead on the ceiling that can be used for some of the top mounting locations. Check to see if you prefer to use these factory locations as the nets typically have enough adjustment to allow for this option. If your vehicle does not have handles in desired locations or you prefer to install mounting points for better fitment, please follow the below steps.

**IMPORTANT: READ INSTRUCTIONS FULLY BEFORE STARTING**

*Time: About 60-90 minutes*



**Paw Level:**

**Tools and included Hardware:**

(may vary by vehicle year or trim)

Displayed Left to Right

1. Power Drill
2. Torx T-45 and Ratchet Wrench
3. Metal drill bit (5/32") and Phillips #2 bit
4. Rubber mallet or similar hammer
5. Pilot Hole Punch
6. Raingler C100L D-ring tether kit
7. Optional panel removal tool

**Note:** Watch the video here <https://vimeo.com/321352161> for instructions on how the C100 attachment straps are installed and then proceed to the following steps specific for the Jeep Grand Cherokee. The similar process will also apply to older body style models.

### Step 1

Grasp the C-pillar upper trim panel pulling down from ceiling towards center of Jeep. Pulling the back-door weather stripping will allow you to get a good edge to wiggle and pop it loose. If you're having trouble, a panel removal tool can sometimes help.



### Step 2

Pre-tapping your location with a punch and a small rubber hammer will make drilling the pilot hole for the footman mount easier.

The Footman mounting hole works well at about 1-1/4" above the factory small hole shown here just next to the door opening. Mark, tap and drill the rear hole and position the D-ring strap to center between the panel pegs (shown in step 4 image) so that the trim panel will



**Raingler**  
NETS & GRIPS

### Step 3

Loop the D-ring strap up and over the plastic panel negs at the top of the trim piece and shown.




### Step 4

Line up the plastic panel snaps and press and pop into place leaving the ring exposed.



## Step 5

Repeat for the other side and loosely install the net by running the straps through the rings you just installed. (RAINGLER label should face down and the top of the logo should face the front of the vehicle)

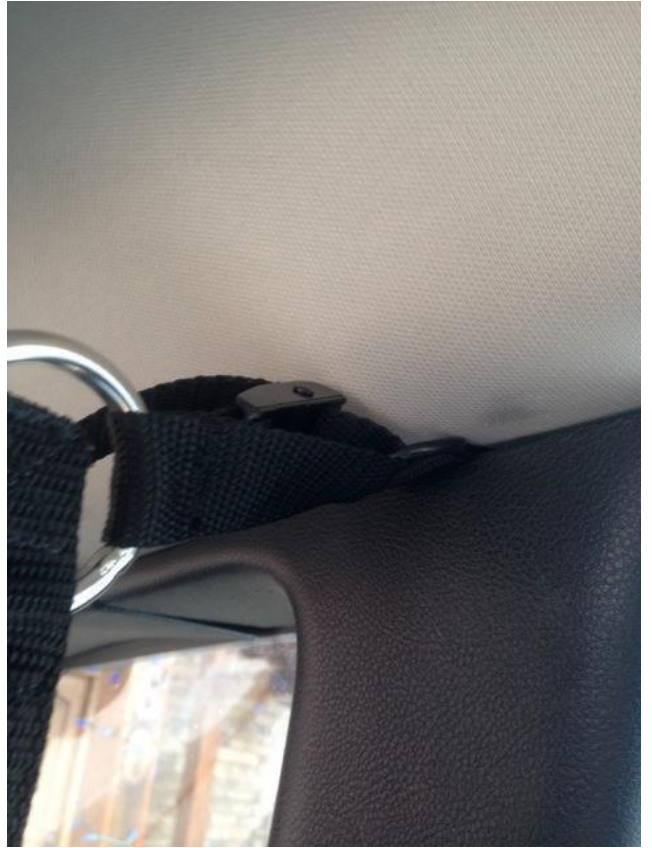

## Step 6

The D pillars are essentially the same as the C pillars, just make sure to check for any hidden lines, and install as to allow the D ring to protrude PAST the plastic trim panel when reassembled.



**Raingler**  
NETS & GRIPS



## Step 7

Wrap and tuck your straps for a nice, clean look.

See video here for details (shown on full barrier net, but same installation process):

<https://vimeo.com/316588617>

## Step 8

Stock Photo Shown. This is similar to how your Jeep should look like now, use with rear seats up or down. Easy to completely remove and stowaway in storage area if needed.



Thank you for purchasing Raingler Nets.  
If you have any questions please contact us,  
we are here to help!

See all our install videos on Vimeo!

<https://vimeo.com/raingler>

**Raingler**  
NETS & GRIPS