

Raingler

NETS & GRIPS

Dodge Caravan/Chrysler T&C

Barrier Net Install

IMPORTANT: READ INSTRUCTIONS FULLY BEFORE STARTING

Time: About 30-90 minutes



Paw Level:

Tools: (may vary by vehicle)


1. Drill bit (5/32")
2. Phillips bit
3. Optional panel release tool for plastic lip and snaps

NOTE: Many newer models have B-pillar handles, and even overhead on the ceiling, that can be used for some of the top mounting locations. The lower straps can also wrap around the black seat bracket and made to slide with varying seating positions.

Check to see if you prefer to use these factory locations as the nets typically have enough adjustment to allow for this option.

If your vehicle does not have handles in desired locations, or you prefer to install mounting points for better fitment, please follow the steps in this installation guide.

Example shown below for handle mount installation.

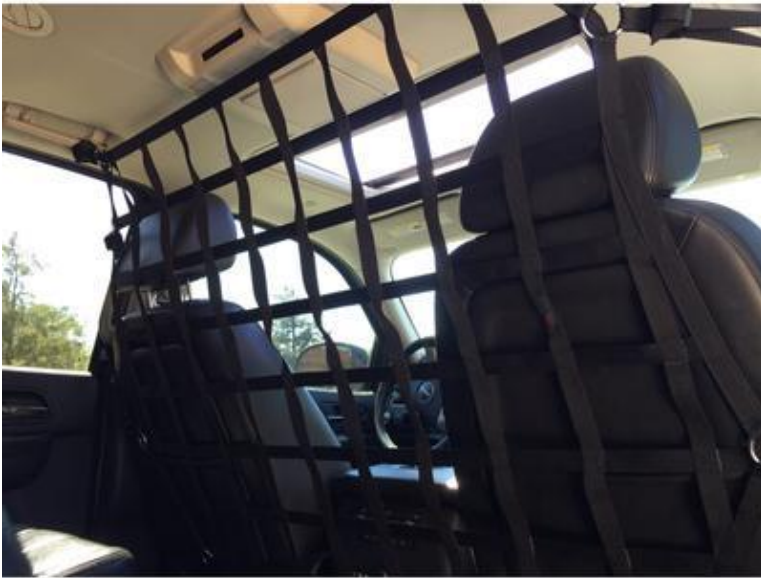

Example shown below for B- pillar mount installation.



Step 1

Grasp the C-pillar upper trim panel pulling down from ceiling towards center of vehicle. Pulling the back-door weather stripping will allow you to get a good edge to wiggle and pop it loose.



Step 2

This step is done similarly in most vehicles by loosening the upper part of the trim panel. Some vehicles this can be done by simply popping the trim snaps loose and carefully pulling out. Other vehicles may have a two-piece trim panel that requires further disassembly.



Be sure to look for fasteners in handle cover pop-outs and upper seat belt anchor bolts like the Torx bolt.




Step 3

Remove upper trim panel enough for access to the inner metal structure near the headliner




Step 4

Mount the footman strap by locating a good open metal surface as to not be too low to push down on the re-assembled plastic trim and not too high to interfere with the headliner material. Mark location on holes and pre-drill the mounting screws again being careful to check that no lines, wiring or seat belt interference will occur when re-assembled.

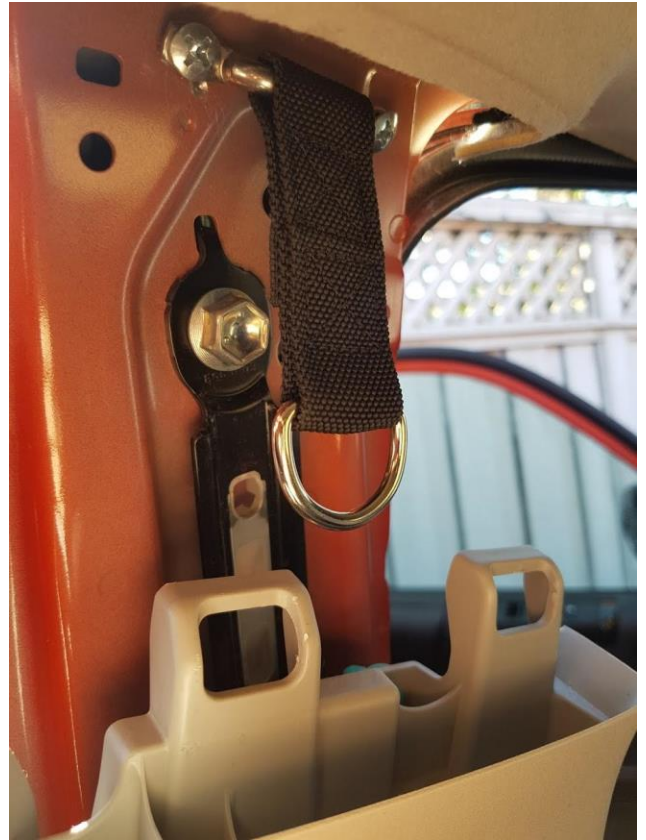

Another example location:

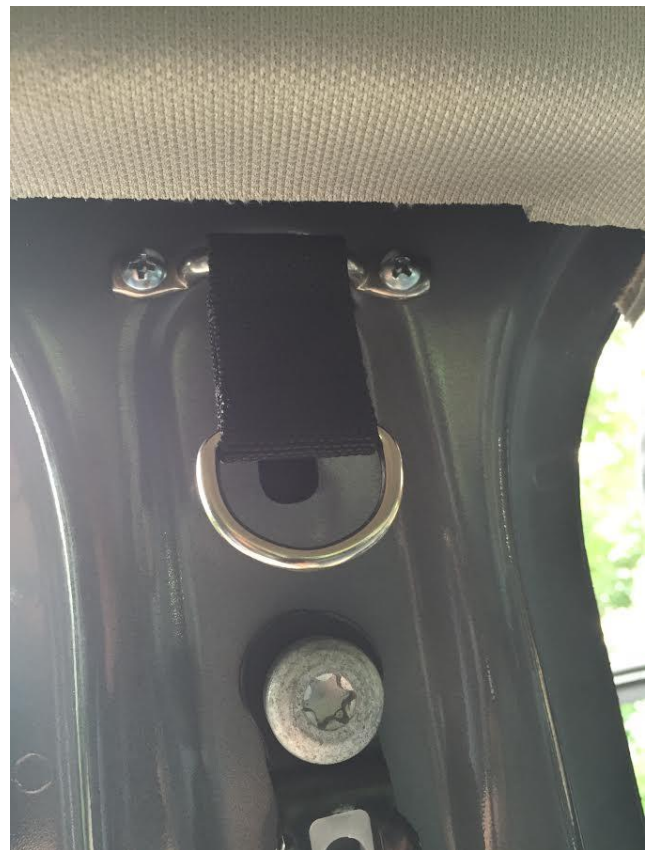

Some Dodge Caravans will have a trim piece that needs to be released down for access. Always verify clearance and depth before drilling and pilot holes or installing mounts. This is the rear ceiling upper seat belt mount.

This area to the outside of the existing Torx bolt should be used for widest area coverage. We also have many other mounts if needed, please contact us as there are several variations that the manufacturer may have in place. The universal D-ring strap can be used in all known applications.



Step 5

Reassemble and final check that there are no obstructions to upper seat belt adjustment or trim panel fasteners etc.



Step 6

You may have the extension D-ring strap that attaches to the floor seat belt bracket mount for easier access to relocate the barrier to alternative positions. Some vans can also have the lower straps either attach to factory seat brackets to the bottom of the seat.

* Do verify that where the strap is install is not an abrasive sharp edge.



Dodge Caravan B pillar location at floor.

Remove the existing bolt. It may have a rubber or plastic trim cover that can be slid up for easier access during installation.

C pillar Torx bolt to remove and reinstall with the D-ring extension strap.



Step 7

Install snap clips (heavy duty, like a dog leash attachment) next to the buckles on easy mount strap. The tension will be adjusted after hanging barrier loosely in place from top to floor to mounts installed. Tension from top first, working your way to the floor. Pay attention to adjusting for normal seat positioning, wrap and tie off the excess adjusting straps.

NOTE: A video is on the Raingler Vimeo channel showing how to finish off end strap neatly if desired.



Step 8

*Install and re-assemble with lower mount in place. Wrap and tie up and excess webbing.

The barrier can be moved as desired, always re-tensioning as needed for seat back reclining position or cargo needs.





Check out the video here:
<https://vimeo.com/raingler>



Thank you for purchasing Raingler Nets.
If you have any questions please contact us,
we are here to help!