

# Raingler

## NETS & GRIPS

---

### GM, Chevrolet, and Cadillac SUV Behind Rear Seats Barrier Divider Net Installation

Full size SUV Tahoe, Suburban, Escalade, Yukon, and Denali  
behind second row barrier install

**NOTE:** Many newer models have B-pillar handles and even overhead on the ceiling that can be used for some of the top mounting locations. Check to see if you prefer to use these factory locations as the nets typically have enough adjustment to allow for this option. If your vehicle does not have handles in desired locations or you prefer to install mounting points for better fitment, please follow the below steps.

**IMPORTANT: READ INSTRUCTIONS FULLY BEFORE STARTING**

**Time:** approximately 90 minutes



**Paw Level:**

**Tools:**

1. Large Torx bits (Typically T-45 and T-47 is used in these trucks.)
2. Ratchet and possibly an extension for Torx
3. Cordless drill
4. Small drill bits or punch for footman screw pilot hole 5/64" or similar
5. Small flat blade and/or panel removal tool for removing access covers and releasing plastic snap divots.

**NOTE:** Move rear seats forward for easiest access.

## Step 1

In the side C pillar near the ceiling, look for the fastener access cover, carefully pop loose, and remove attaching screw, bolt or plastic upper snaps behind trim piece. It may be necessary to loosen top edge of black rubber weather stripping to allow this panel to pop back for you.

Watch that the rubber stripping (shown at right of image) does not drop tar adhesive; handle with care to prevent contact with interior of vehicle.

(Driver's side shown with cover removed)



## Step 2

With upper portion of panel dropped down enough to allow access to inner metal support structure, check for any obstructions, clearance issues, and wiring or washer lines. Install footman in location such as shown to allow the strap and d ring access over the top of the reinstalled trim piece and not too high as to impair the headliner material. Also make sure it is not too low, or the strap will pull against the plastic trim piece.



**Raingler**  
NETS & GRIPS

### Step 3

Reinstall trim and double check that the strap will pull directly across cabin without distorting headliner or plastic trim piece.



### Step 4

Loosen and remove the lower side seat belt anchor bolt with Torx head. (Passenger side shown)



**Raingler**  
NETS & GRIPS



### Step 5

Install floor chassis bracket oriented towards center or rear cargo area as shown.



### Step 6

Install the top of the barrier and then the lower straps before tightening. Tighten straps - top first, then lower.

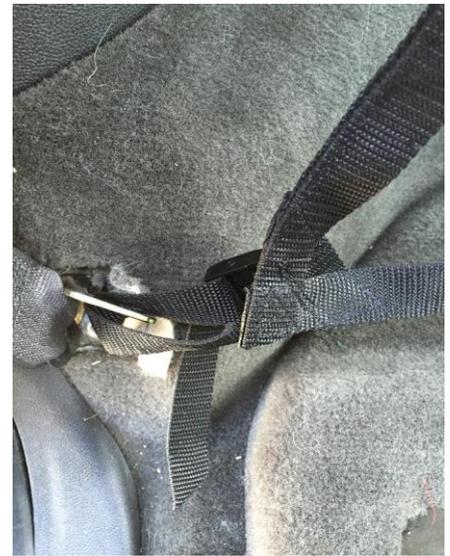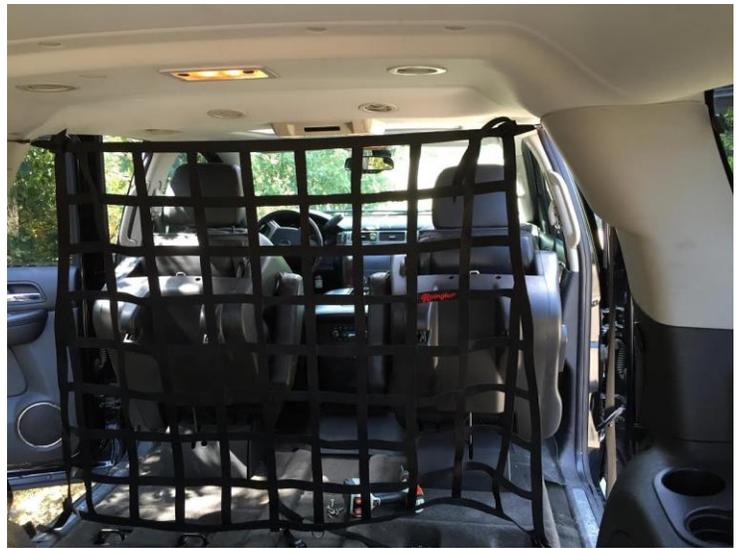

**Raingler**  
NETS & GRIPS

## Step 7

Return seat positions and do final tensioning. The net can be removed, held down, or lifted as desired.



## Step 8

Tie up the loose ends. You can do this by feeding the end of the strap through the opening of the buckle to create a loop. Feed the strap through the loop, and the strap behind, continue until no strap is hanging.

**See video here for details:**

<https://vimeo.com/316588617>

Thank you for purchasing Raingler Nets.  
If you have any questions please contact us,  
we are here to help!

See all our install videos on Vimeo!

<https://vimeo.com/raingler>

**Raingler**  
NETS & GRIPS

866-905-7625 | Tech@RAINGLER.com | Raingler.com