

MK4 RENOVATOR
THE LEGEND CONTINUES





Easy to adjust variable speed gearbox with achievable rates from 0.8kg/ha - 400kg/ha plus



(NEW) Option of 5 or 6 inch row spacing

(NEW) Large loading platform with safety rails for easy access and safety




(NEW) New design agitator shaft, steeper vees and greater box incline giving better seed flow



(NEW) Bin lids now open to 110° with gas struts on the outside of the bins and held closed with latches



(NEW) Individually sprung disc openers with easy change discs, seals and bearings

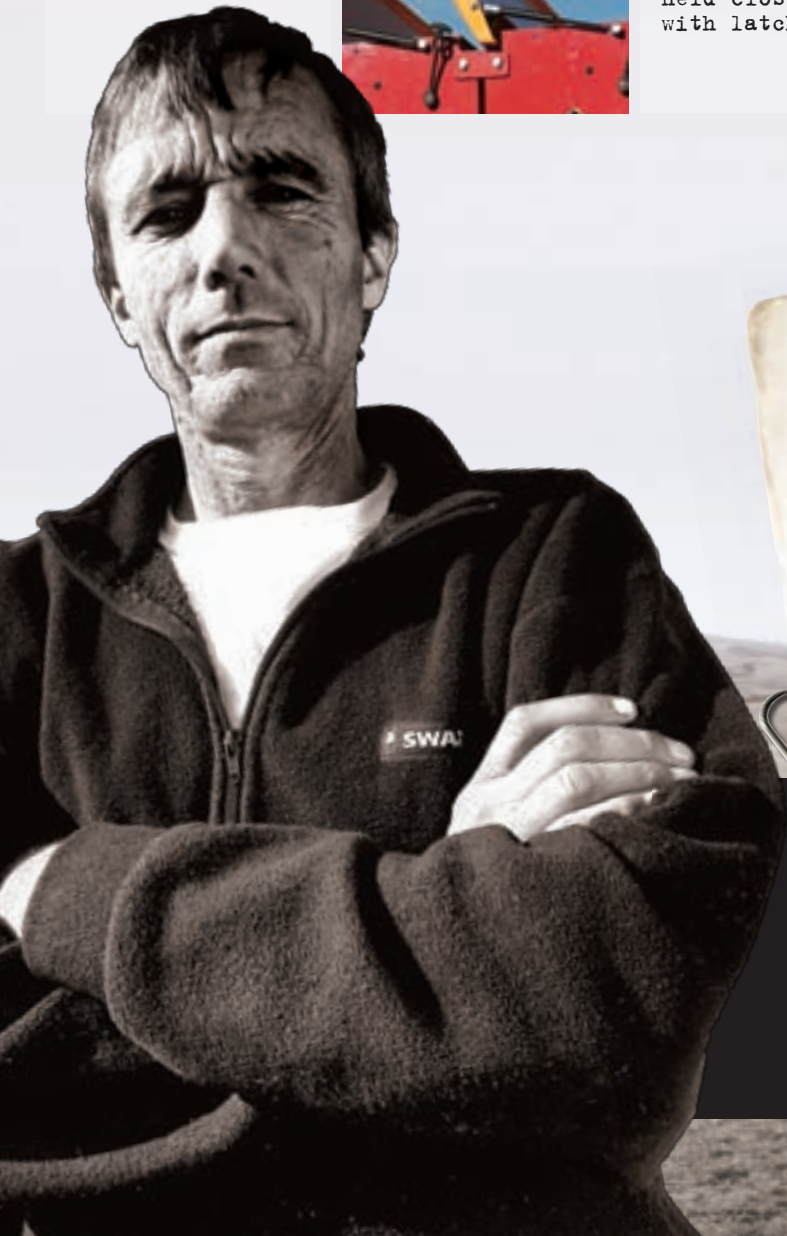

“... for direct drilling, nothing beats the new MK4”.

Barry Curtis, Albury



Large and small metering wheels for sowing a wide range of products from turnips through to peas and fertiliser



25mm coil tines with Duncan 'T' boot and a tungsten tile on the leading edge giving accurate seeding with superior strength and wear



A positive drive via an adjustable ground driven jockey wheel



Easy to set depth adjustment with a collar and threaded shaft adjuster



Easy platform access with foldable step



Easy calibration system with simple seed diversion into the trays provided





MK4 RENOVATOR

FEATURES

All MK4 Renovators come with the following features as standard

- Large capacity bins
- 25mm coil tine and Duncan 'T' boot with tungsten tile on leading edge
- Weather skirts to cover over seeder units
- Safety rails on platform
- Weigh kit with scales
- Electronic hectare meter
- Safety chains
- Stainless steel agitator shaft

Options and accessories

- Disc openers on the front of the drill
- Third/small seed box
- Tine Harrow or Uni-Roller following tool
- Rear tow bar
- Stainless steel box(es)
- Seed level indicator
- Hydraulic cylinder for drawbar
- Hydraulic cylinder for disc openers
- Baffle extension kit
- Lighting kit
- Harrow transport kit
- Jack stand

DIMENSIONS & CAPACITIES

	21 Run 3m	24 Run 3m	24 Run 3.5m	28 Run 3.5m
WIDTH (over wheels) (mm)	3070	3070	3570	3570
HEIGHT (ground wheels up) (mm)	2145	2145	2145	2145
OVERALL LENGTH (mm)	3825	3825	3825	3825
WEIGHT inc. disc openers (UNLADEN) (kg)	2030	2130	2360	2490
ROW SPACING (mm)	147.5	125	147.5	125
EFFECTIVE SOWING WIDTH (mm)	3097.5	3000	3540	3500
BOX CAPACITY (lt per box)	550	550	650	650
SMALL BOX CAPACITY (lt)	70	70	90	90

DUNCAN AG NEW ZEALAND
 PO BOX 2018, WASHDYKE 7941, TIMARU
 PH: 0800 177 171
 Email: admin@duncanag.co.nz
 www.duncanag.com

DUNCAN AG AUSTRALIA
 4B SILVERTON CLOSE, NORTH LAVERTON, VICTORIA 3026
 PH: 0061 393 149 666
 Email: admin@duncanag.com.au



In accordance with the company's policy of continuous improvement to its machines, alterations in specifications may be made without notice. The company accepts no responsibility for any discrepancies which may occur between specifications of its machines and the descriptions thereof contained in this publication.