




## QLT 180



QUICK LOAD POUCH  
ORANGE JUICE DISPENSER

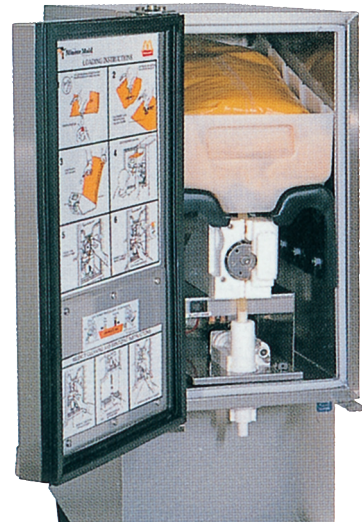

## FEATURES

One Product Selection  
Front Loading of Concentrate  
6 liter (1.6 US gal.) disposable concentrate pouch capacity  
Portion Control Dispensing  
Accurate, Reloadable, 180° Peristaltic Pump

Narrow profile – 10 3/4 in (272.8 mm) wide  
UL, CUL, CE and NSF Listed  
Adjustable Brix Control  
Simple Sanitation and Service  
Environmentally Friendly – R-134a Refrigerant  
Sturdy Stainless Steel Cabinet

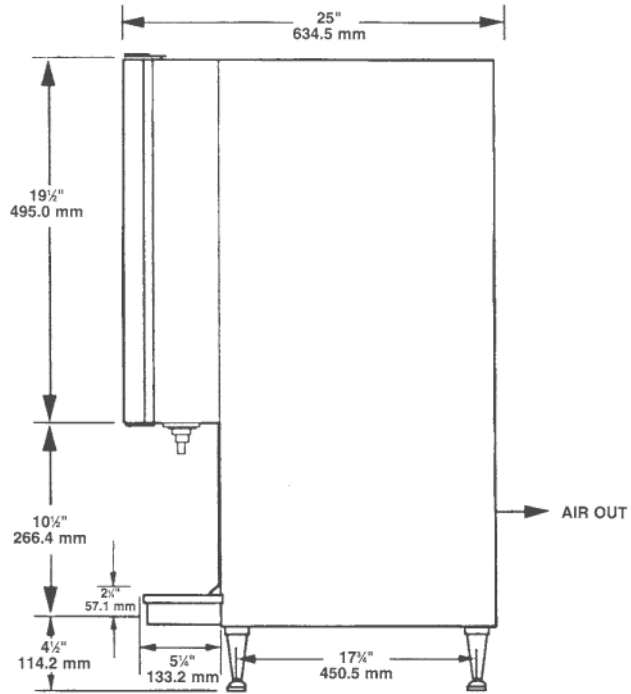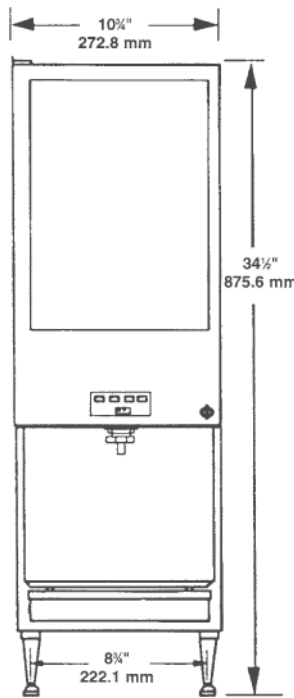

PART NUMBER	DESCRIPTION
45100401	QLT180 / 1000-1 Juice Dispenser for BIB, 115V

## TECHNICAL SPECIFICATIONS

**Electrical Rating** . . . . . 1000-1 – 115V/ 60 Hz / 9.4 Amps

**Refrigeration** . . . . . 1/3 H.P. Hermetically Sealed System, R-134a Refrigerant 6.25 oz (177 g)

**Dimensions:**

**Height** . . . . . (with 4 in legs) 34 1/2 in (875.6 mm)

**Width** . . . . . 10 3/4 in (272.8 mm)

**Depth** . . . . . 25 in (634.5 mm)

**Weights:**

**Dry Weight** . . . . . 110 lb (50 kg)

**Shipping Weight** . . . . . 143 lb (65 kg)

**Water Connection** . . . . . 3/8 in (9.5 mm) SAE male flare fitting on dispenser

**Concentrate Storage** . . . . . 6 liter (1.6 US gal.) Disposable Pouch

**Water Supply Requirements** . . . . . 100 psi (7 kg / sq cm) max static pressure  
20 psi (1.4 kg / sq cm) min dynamic pressure

**Cooling Capacity** . . . . . Continuous 5 oz (147.85 ml) drinks at 4 per minute with 75°F (24°C) ambient and 45°F (5°C) concentrate without exceeding 45°F (7°C) temperature

**Flow Rate** . . . . . Adjustable water flow rate from 1.6 oz / sec (47.3 ml / sec) to 2.2 oz / sec (65 ml / sec)

**Agency Listings** . . . . .  

