



Resettable Combination Padlocks Instructions



160 Series Resettable

- The combination is set at the factory to open at 0-0-0-0
- To open, turn each wheel to 0 and depress the shackle
- To lock, scramble the wheel and depress the shackle

TO CHANGE THE COMBINATION

1. Pull up shackle
2. Turn setting screw clockwise until you hear and feel a click (about 120 degrees)
3. Select your own combination
4. Important, turn setting screw to original position (screw slot must be in line with shackle)

180 Series Resettable

- The combination is set at the factory to open at 0-0-0-0
- To open turn each wheel to 0 and depress the shackle
- To lock, scramble the wheel and depress the shackle

TO CHANGE THE COMBINATION

1. Open the padlock
2. Insert the change tool key into the keyhole on the side of the lock
3. Push the change key in as far as it will go and turn 90 degrees in either direction. **WARNING** if the change key is not push in fully, the the combination may be lost
Leave the change key in the keyhole.
4. Set the wheels to the new number. Make sure the numbers are aligned horizontally, other wise the combination may be lost
5. Turn the change key back to its original position, then pull it out. The lock is now set to the new combination
6. To Lock, turn one or more wheels and depress shackle

170 Series Resettable

- The combination is Set at the factory to open at 0-0-0-0
- To open turn each wheel to 0 and depress the shackle
- To lock, scramble the wheel and depress the shackle

TO CHANGE THE COMBINATION

1. Open lock
2. Press change pin down into open shackle hole as far as it will go
If pin is not fully depressed, then a lost combination will result
3. Leave pin in shackle hole
4. Set the wheels to your own combination
5. Pull out change pin. Lock is now set to your new combination
6. To lock, turn one or more wheels and depress shackle





Combination Padlocks Instructions



145 and 155 Series Resettable

- The combination is set at the factory to open at all 0's
- To open, turn each wheel to 0 and open the shackle
- To lock, close shackle and scramble the wheel

TO CHANGE THE COMBINATION

1. Open padlock
2. Turn shackle 90 degrees facing you. Press the shackle down into the notch and hold. If shackle is not fully depressed, then a lost combination will result
3. Hold shackle down and select your own combination
4. Release the shackle and close padlock
5. Scramble the combination. Your lock is now closed and set to your new combination

158 Series Resettable

- The combination is set at the factory to open at 0-0-0
- To open, turn each wheel to 0 and open the shackle
- To lock, close shackle and scramble the wheel

TO CHANGE THE COMBINATION

1. Open padlock
2. Turn shackle 90 degrees facing you. Press the shackle down into the notch and hold. If shackle is not fully depressed, then a lost combination will result
3. Hold shackle down and select your own combination
4. Release the shackle and close padlock
5. Scramble the combination. Your lock is now closed and set to your new combination




190 Series Resettable

- The combination is set at the factory to open at 0-0-0-0
- To open, turn each wheel to 0 and push down on the shackle to open
- To lock, close shackle and scramble the wheel

TO CHANGE THE COMBINATION

1. Open padlock
2. Insert key firmly and rotate key 90 degrees clockwise
3. Reset combination
4. Turn back key 90 degrees and remove key
5. Scramble the combination
6. Push down shackle to close - Your lock is now closed and set to your new combination.

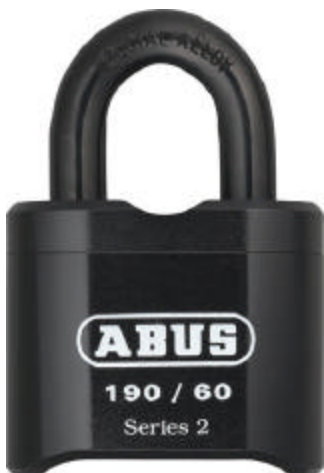

ABUS Lock Company

23910 North 19th Ave, #56, Phoenix, AZ 85085

Phone: (623) 516-9933 Toll free: (800) 352-2287 Fax: (623) 516-9934