

Rubber profile
Type: Passive Profiles

Mechanical data

Dimensions in mm	32 x 45
Tolerances acc. to DIN ISO 3302-1 tl. E2	
Material	EPDM
Delivery length	25 m
Weight	0.82 kg / m
Material hardness	65 Shore A
Aluminum rail	AP-5



General data


Actuating distance	*
Actuating force	*
Overtravel distance 250 N	22 mm
Overtravel distance 400 N	25 mm
Operating temperature	-10°C to 55°C
Max. temperature range	-20°C to 55°C
Inactive end range with higher forces	0 mm (no deadzone)
Standards	* (EN 12978)

*) depending on the connected control unit and on the features of the gate


Special

Packaging	1.2 x 1.2 m cardboard package
-----------	-------------------------------

Typical Force-Travel-Diagram*

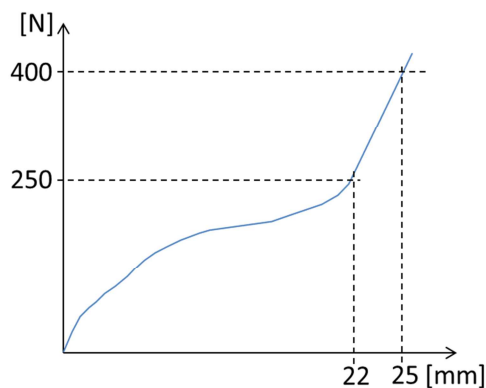

Dimensions [mm]

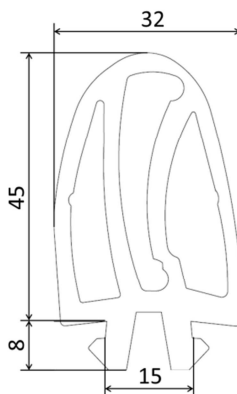

Accessories:

256045 EN-C42

End cap

