



+44 (0)1691 655150



SKU: CP-725-IP


4 Channel Input Board | LoRa Telemetry Module

The 725 telemetry system provides bi-directional, transceiver, remote switching. Each Module has two Switch inputs and two Relay changeover contact outputs. When two or more modules are paired together the relay outputs will follow the state changes of the other modules' Inputs. The 725-IP input module can be connected to the 725-TRX to provide 4 extra inputs per module.

Specification

Operating voltage	N/A
Channels	4
Connection	Connects Directly to 725TRX. Connecting ribbon cable supplied. Up to 16 725-IP may be Daisy Chained together.
Supply current	15mA
Operating temp	-10 to +50°C

Product

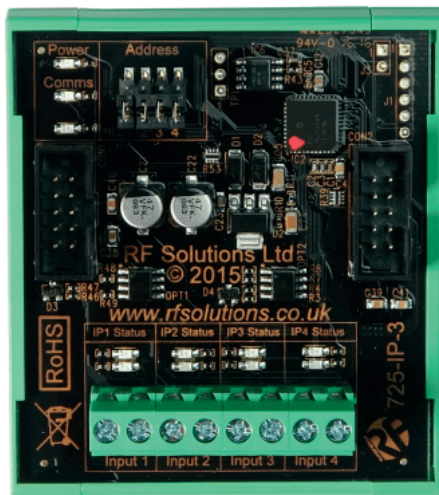

Dimensions

Height – 78mm
Width – 68mm
Depth – 42mm