



+44 (0)1691 655150



**SKU: CP-725-OP**


## 4 Channel Output Board | DIN Rail LoRa Telemetry Module

The 725 telemetry system provides bi-directional, transceiver, remote switching. Each Module has two Switch inputs and two Relay changeover contact outputs. When two or more modules are paired together the relay outputs will follow the state changes of the other modules' Inputs. The 725-OP output module can be connected to the 725-TRX to provide 4 extra outputs per module. The system inputs / outputs can be used in various ways which are shown in the datasheet.

### Specification

Operating voltage	N/A
Channels	4
Relay (230Vac)	5A
Operating temp	-10 to +50°C

### Product

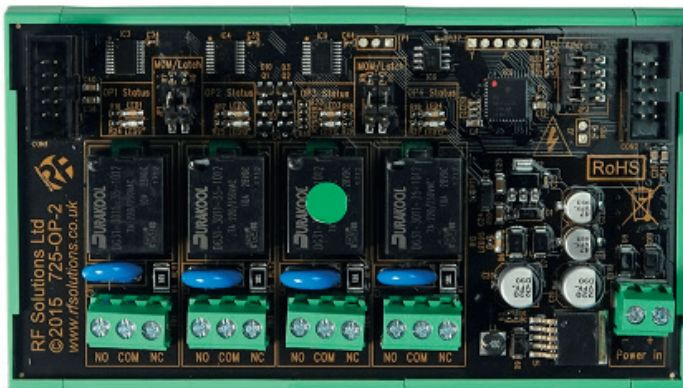

### Dimensions

Height – 78mm  
Width – 136mm  
Depth – 42mm