

Datasheet

CP-V-DNAKE-IPK01



Instruction

Embrace security with a simple touch. IP Video Intercom kit is a complete solution that includes a door station, an indoor monitor, and accessories to mount. The new IP intercom kit is immediately ready for use and does not require any special programming.

Key Features

- Plug & Play
- User friendly interface
- Standard PoE
- One-touch calling
- Remote unlocking
- CCTV integration

Package Features

- Package Content:
 - DNAKE IPK01
(Power adapter not included)
 - Bracket
 - Screwing Kit
 - User Manual
- Qty/CTN: 9 pcs
- N.W/PCS: 0.89 kg
- G.W/CTN: 12.47 kg
- Giftbox Size: 295 x 225 x 87 mm
- Carton Size: 705 x 365 x 250 mm

Datasheet


Key Features

- Easy configuration
- 7-inch capacitive touch screen
- Powered by PoE or power adapter (DC12V/2A)
- Support SIP 2.0 protocol, easy integration with other SIP devices
- Easy integration with elevator control system
- Support monitoring 8 IP cameras

Physical

- System: Linux
- RAM: 64 MB
- ROM: 128 MB
- Front Panel: Plastic
- Power Supply: PoE (802.3af) or DC 12V/2A
- Standby Power: 1.5 W
- Rated Power: 9 W
- Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive
- RS485: 1
- Power Output: 1 (12V/100mA)
- Doorbell Input: 8 (use any alarm input port)
- Alarm Input: 8
- Installation: Surface Mounting / Desktop
- Dimension: 195 x 130 x 14.5mm
- Working Temperature: -10°C to +55°C
- Storage Temperature: -40°C to +70°C
- Working Humidity: 10% to 90% (non-condensing)

CP-V-DNAKE-IPK01

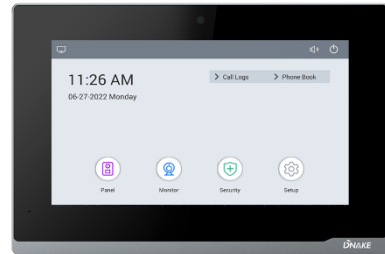

Display

- Display: 7-inch TFT LCD
- Screen: Capacitive touch screen
- Resolution: 1024 x 600

Audio

- Audio Codec: G.711
- Echo Cancellation
- DTMF: RFC2833
- Microphone: Built-in microphone
- Speaker: 8Ω / 1W

Video

- Video Codec: H.264

Networking

- Protocol: SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP

Datasheet

Key Features

- Powered by PoE or power adapter (DC12V/2A)
- Open the door by IC card (20,000 users)
- Support SIP 2.0 protocol, easy integration with other SIP devices

Physical

- System: Linux
- RAM: 64 MB
- ROM: 128 MB
- Front Panel: Plastic
- Power Supply: PoE (802.3af) or DC 12V/2A
- Standby Power: 1.5 W
- Rated Power: 3 W
- Camera: 2MP, CMOS
- Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive
- Door Entry: IC card (13.56MHz)
- RS485 Port: 1
- Relay Out: 1
- Exit Button: 1
- Door Magnetic: 1
- IP Rating: IP65
- Installation: Semi-flush Mounting
- Dimension: 170.5 x 111 x 38.6 mm
- Working Temperature: -40°C to +55°C
- Storage Temperature: -40°C to +70°C
- Working Humidity: 10% to 90% (non-condensing)

CP-V-DNAKE-IPK01



Audio

- Audio Codec: G.711
- Echo Cancellation
- DTMF: RFC2833
- Microphone: Built-in microphone
- Speaker: Built-in speaker

Video

- Video Codec: H.264
- Video Resolution: 1280 x 720
- Viewing angle: 100° (D)
- Max. Image Transfer Rate: 720p – 25fps
- Light Compensation: LED white light

Networking

- Protocol: ONVIF, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP