COPILOT CHRONO

CASE & DIAL

316L Stainless steel case with sand blasted stainless or black PVD finish Solid wrist pins with real screws
Screw down case back
Water resistant to 10 ATM
Japanese luminova on dial and hands
Date display
Screw down crown
Sapphire crystal with AR coating
Water resistance: 10 ATM/330 ft/100 m

MOVEMENT

Miyota OS-20 Quartz Chronograph Movement with date Approx. 3-year battery life



DIMENSIONS

Watch dimensions: 42 mm x 42 mm (1.65 in)

Bezel diameter: 43 mm (1.7 in)

Distance between lugs: 22 mm (0.9 in)

Thickness: 15 mm (0.6 in)

Weight: 120 g


WARRANTY

Trintec Watches are warranted to be free from defects in material and workmanship under normal service for a period of *one year* from the date of purchase. This warranty does not apply to glass or water damage resulting from accidents, alterations or misuse. During the warranty period, return the product with proof of purchase to the dealer for replacement.

Trintec Industries Inc. 200 Fuller Rd., Unit 15 Ajax, ON L1S7G9



CROWN POSITIONS

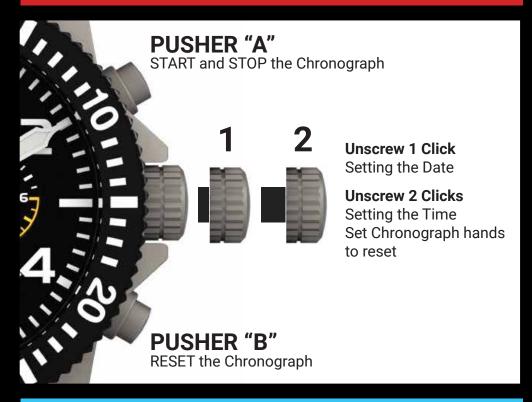

INSTRUCTIONS

SETTING THE DATE

- 1. Unscrew the crown and pull the crown out one click
 - 2. Turn the crown clockwise to set the date
 - 3. Push the crown in and screw down

(DO NOT set Day and Date between 9:00pm-1:00am)

SETTING THE TIME

- 1. Unscrew the crown and pull the crown out two clicks
- 2. Turn the crown to adjust the hour and minute hands
 - 3. Push the crown in and screw down

SETTING CHRONOGRAPH HANDS TO RESET

- 1. Unscrew the crown and pull the crown out two clicks
- 2. Push "A" to reset the hands position to the ZERO position, and continue to push "A" to put them forward