# NAV-01 CHRONO

#### **CASE & DIAL**

Solid 316L stainless steel case with sandblasted finish Solid wrist pins with real screws Screw down case back Water resistant to 10 ATM / 330 ft / 100 m Japanese LumiNova on dial and hands Date display Screw down crown Sapphire crystal with AR coating

## **MOVEMENT**

Miyota OS-20 Quartz Chronograph Movement with date Accuracy: +/- 20 seconds/month Approx. 3-year battery life



## DIMENSIONS

Watch dimensions: 42 mmx 42 mm (1.65 in) Distance between lugs: 22 mm (0.9 in) Watch case length lug to lug: 54 mm (2.1 in) Thickness: 13 mm (0.5 in) Weight: 115 g


## WARRANTY

Trintec Watches are warranted to be free from defects in material and workmanship under normal service for a period of **one year** from the date of purchase. This warranty does not apply to glass or water damage resulting from accidents, alterations or misuse. During the warranty period, return the product with proof of purchase to the dealer for replacement.

Trintec Industries Inc. 200 Fuller Rd., Unit 15 Ajax, ON L1S7G9 www.trintec.com



## **CROWN POSITIONS**

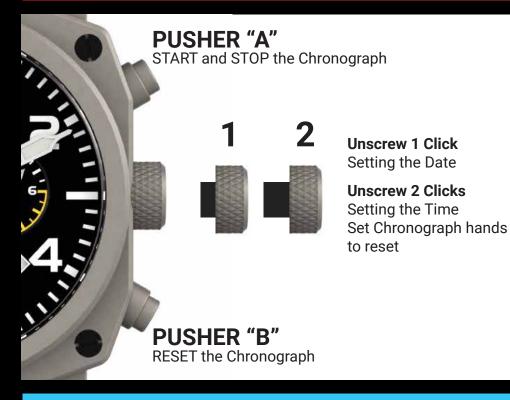

## INSTRUCTIONS

SETTING THE DATE

Unscrew the crown and pull the crown out one click
Turn the crown clockwise to set the date
Push the crown in and screw down
(DO NOT set Day and Date between 9:00pm-1:00am)

## SETTING THE TIME

1. Unscrew the crown and pull the crown out two clicks

2. Turn the crown to adjust the hour and minute hands3. Push the crown in and screw down

## SETTING CHRONOGRAPH HANDS TO RESET

 Unscrew the crown and pull the crown out two clicks
Push "A" to reset the hands position to the ZERO position, and continue to push "A" to put them forward