


Closed Body Rigging Screw Eye/Eye – RSEE

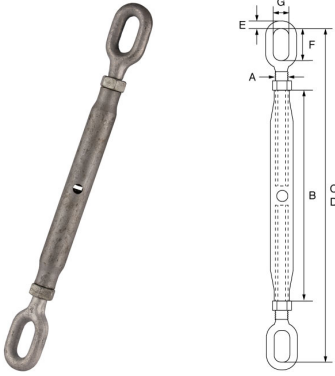

GT

- Mild steel.
- Hot dipped galvanised finish.
- Proof load tested to 2 times the W.L.L.
- Minimum breaking load is 5 times the W.L.L.
- Metric Threads.
- Marked with CE, W.L.L, manufacturers ID and traceability code.
- Certification available **2.1** **DoC**

Product Code	W.L.L. t	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kgs
RSEE6	0.2	6	100	165	245	5.5	11	11	0.118
RSEE8	0.32	8	108	178	261	6	12	12	0.19
RSEE10	0.5	10	125	210	308	8.5	13	13	0.34
RSEE12	0.7	12	195	325	484	11	30	15	0.76
RSEE16	1.2	16	230	380	564	12	40	20	1.29
RSEE20	1.5	20	270	455	673	16	50	24	2.38

Product Code	W.L.L. t	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kgs
RSEE22	2.2	22	295	495	736	16	50	24	2.8
RSEE24	3.2	24	325	545	806	19	56	28	3.87
RSEE33	4.8	33	370	665	961	29	70	35	8.9
RSEE39	6	39	400	725	1032	34	80	40	11.08
RSEE45	8.5	45	400	760	1050	30	90	45	16.4
RSEE48	11	48	400	820	1110	35	100	45	23