
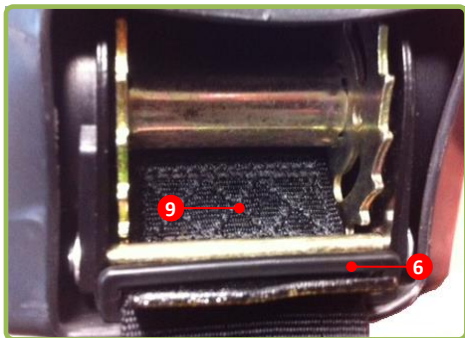


Norms : EN360:2002 - References Numbers : FA2030002 – FA2030102 – FA2030202 – FA2030302 – FA2050202 – FA2050301 - FA2050302 – FA2050502

With the help of the user instruction of the product and the inspection sheet, and without specific tools or a particular measuring device. Observe and touch each component of the product in order to detect possible anomalies. If one or more checkpoints are defective, the product must be withdrawn from service and replaced by a compliant device.

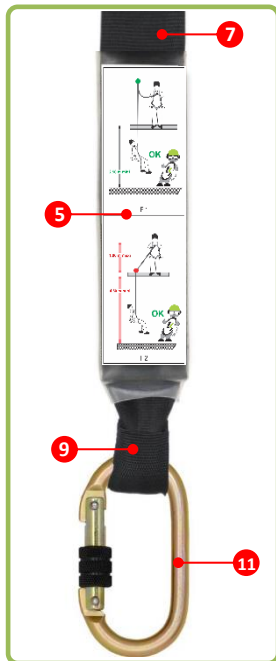

Checkpoints

Inspect the visual aspect of the retractable fall arrester, the device must be verifiable.

1 Fall indicator

Make sure that the fall indicator has not been activated after a fall.

Green ring = No fall / Red ring = Do not use the device again. Replacement obligatory.

2 Anchor ring

Verify the condition of the anchor ring; it should not be misshapen, oxidized, cut or worn. It should spin freely.

3 Connecting axis

Check the state of the connecting axis; there should be neither play, nor distortion, oxidation, cut nor wear.

4 Protective casing

Verify the condition of the protective casing; it should not be misshapen, cut, broken or worn.

Verify the presence and the tightening of the casing cap screws (depending on model)

5 Marking labels

Make sure the labels are present and legible.

6 Damper guide

Verify the presence and the condition of the damper guide; there should be no part likely to damage the webbing.

7 Webbing

Check the state of the webbing all across its length; there should be neither distortion, cut, wear, burn at all.

8 Energy absorber

Check the lengthening of the energy absorber, if the energy absorber is lengthened, it is necessary to replace the product, Verify the state and the presence of the transparent protective sleeve.

9 Endings

Verify the condition of the outer ending; there should be no distortion, cut, wear, burn.

Check the state of the stitching on the inner ending; there should be no distortion, cut, wear, burn.

10 Functional inspection

Blocking system

Make sure the blocking system works properly by pulling the webbing; when the blocking system is operating, the rolling-out and the sliding of the webbing should not be possible. Do the same process at middle length and at the end of the webbing.

Self-retracting system

Check that the self-retracting system of the device works properly by rolling-out the whole webbing and releasing it while keeping a hand on it as it reels into the casing. The self-retracting system should bring the whole webbing back, including the connector.

11 Connectors

Use the inspection guide of connectors.

Preservation of State: Evaluate de preservation of state into account of the controls above, and the general aspect of the product.