




FA 20 302 02

P. 1 | 2


# VORAS F2





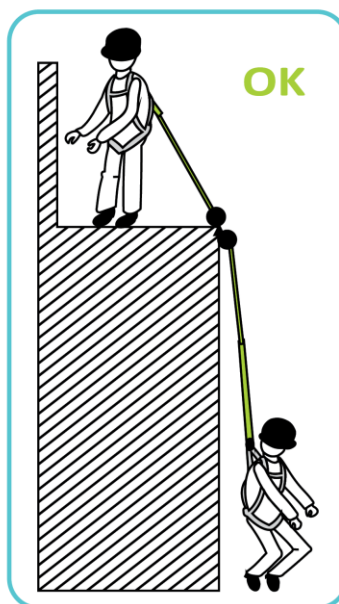

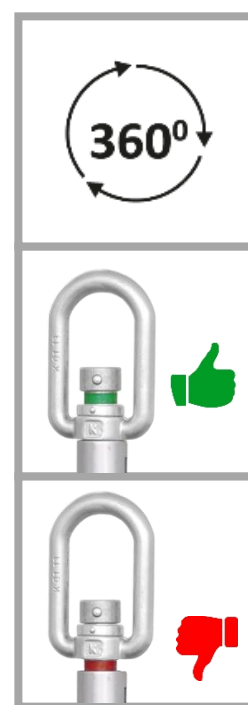


## FACTOR 2




①




HS CODE
84798997
CARTON SIZE / PCS.
60 x 40 x 24 cm / 10
AET N°2777/10835-01/E12-01
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland


REF.	FA 20 302 02
LG. 	2.0 m
KG	140 KG
CE	EN 360:2002
MAT. 	PVC PA & PES 50 mm
	 --- / FA 50 202 17
	x1
R(kN)	15 kN
	NO
+	FACTOR 2
	1.35 KG

LG.  


**Longueur** Poids maxi utilisateur  
**Length** Max. user weight  
**Longitud** Peso máximo del usuario  
**Lunghezza** Peso Max. dell'utente  
**Länge** Höchstgewicht des Benutzers

MAT.  



**Matière carter / sangle**  
Material of casing / webbing  
**Material cárter / correa**  
Material dei carter / Cinghia  
**Material Gehäuse / Gurt**



**Matière connecteur haut / connecteur bas**  
Material of top connector / bottom connector  
**Material conector alto / conector bajo**  
Materiale connettore alto / connettore basso  
**Material oberes / unteres Verbindungselement**



**Nombre d'émerillons**  
Number of swivels  
**Cantidad de eslabones giratorios**  
Numero di tornichetti  
**Anzahl der Wirbel**



**Homologué pour le travail à proximité d'arêtes vives**  
Approved for work near sharp edges  
**Homologado para trabajo cerca de aristas vivas**  
Omologato per lavoro in prossimità di spigoli vivi  
**Zugelassen für Arbeiten in der Nähe scharfer Kanten**

+

**Point fort**  
Key feature  
**Ventaja principal**  
Punti forti  
**Produktvorteil**