

# Melixon-S



①






②



③



④

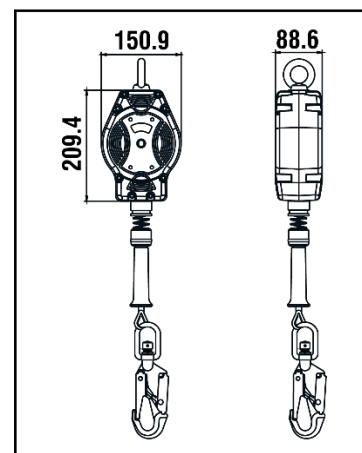

<b>HS CODE</b>
84798997
<b>CARTON SIZE / PCS.</b>
60 x 40 x 24 cm / 4
<b>AET N°2777/10829-02/E01-02</b>
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
<b>MODULE D F14/14003.02</b>
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland

<b>REF.</b>	<b>FA 20 402 07</b>
<p>LG.</p> <p>KG</p>	7 m
<b>CE</b>	EN 360:2002
<p>MAT.</p>	Polyamide 6 - 30% fiber glass
<p>STEEL Ø4.8 mm</p>	
	<p>FA 50 101 17 / FA 50 203 20 with fall indicator</p>
<p>360°</p>	x2
<b>R(kN)</b>	12 kN
	YES
	4.08 KG

<p>LG.</p> <p>KG</p> <p><b>Longueur</b> Poids maxi utilisateur <b>Length</b> Max. user weight <b>Longitud</b> Peso máximo del usuario <b>Lunghezza</b> Peso Max. dell'utente <b>Länge</b> Höchstgewicht des Benutzers</p>	<p>MAT.</p> <p><b>Matière carter / câble</b> Material of casing / wire rope <b>Material cárter / cable</b> Material dei carter / cavo <b>Material Gehäuse / Seil</b></p>	<p><b>Matière connecteur haut / connecteur bas</b> Material of top connector / bottom connector <b>Material conector alto / conector bajo</b> Materiale connettore alto / connettore basso <b>Material oberes / unteres Verbindungselement</b></p>
<p>360°</p> <p><b>Nombre d'émerillons</b> Number of swivels <b>Cantidad de eslabones giratorios</b> Numero di tornichetti <b>Anzahl der Wirbel</b></p>	<p><b>Homologué pour le travail à proximité d'arêtes vives</b> Approved for work near sharp edges <b>Homologado para trabajo cerca de aristas vivas</b> Omologato per lavoro in prossimità di spigoli vivi <b>Zugelassen für Arbeiten in der Nähe scharfer Kanten</b></p>	