


GT Blue Pin Dee Shackle with Safety Nut and Bolt Pin – BPSAD

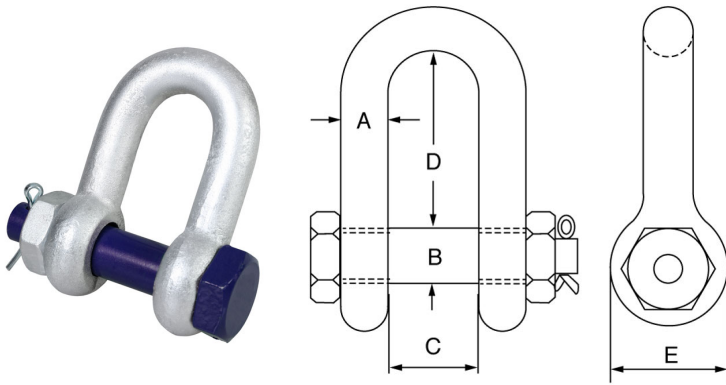

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Hot dipped galvanised finish.
- Meets the W.L.L. requirements of EN 13889 (from 0.5t to 25t) and US Fed. Spec RR-C 271.
- Temperature range 0°C up to +200°C.
- Minimum breaking load is 6 times the W.L.L. up to 85t, and 5 times the W.L.L. above 85t.
- Marked with CE, W.L.L, manufacturers ID, size and traceability code.
- Certification available [2.1](#) [3.1*](#) [DoC](#)
- Certification available [2.1](#) [3.1](#) [DoC](#)

Product Code	W.L.L. t	A mm	B mm	C mm	D mm	Weight kgs
BPSAD1	1	9.5	12	17	31.6	0.17
BPSAD1.5	1.5	11	12	18	36.5	0.25
BPSAD2	2	12.7	16	20.6	41.3	0.44

Product Code	W.L.L. t	A mm	B mm	C mm	D mm	Weight kgs
BPSAD3.25	3.25	16	19.8	27	51	0.79
BPSAD4.75	4.75	19	22	32	62	1.26
BPSAD6.5	6.5	22	27	36.6	74.8	1.88
BPSAD8.5	8.5	25	30	43	81	2.78
BPSAD9.5	9.5	28.5	33	46	89.5	3.87
BPSAD12	12	31.8	36	51.6	100.8	5.26
BPSAD13.5	13.5	34.9	39	57	112.5	6.94
BPSAD17	17	38	42	60	125	8.79
BPSAD25	25	44	52	73	140.5	14.99
BPSAD35	35	50	56	82	171.5	20.65
BPSAD55	55	63.5	68	105	203	41.05
BPSAD85	85	75	85	127	230	62
BPSAD120	120	88	95	133	262	106