


Green Pin® Closed Spelter Socket – GPCSS

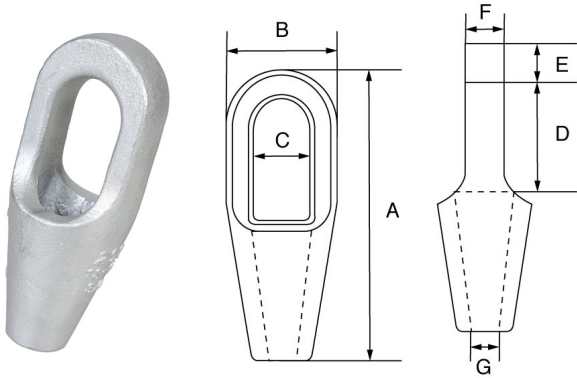

- High tensile steel.
- Hot dipped galvanised finish.
- Temperature range -20°C up to +200°C.
- Marked with CE, manufacturers ID, size, product ID mark and traceability code.
- Full CAD support available upon request.
- Certification available **2.1** **3.1** **MTC** **DoC**

G-6411

Product Code	Number	M.B.L. t	Wire Rope Dia mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kgs
GPCSS296	296	8	6 - 7	101	37	22	40	11	13	9	0.26
GPCSS297	297	12	8 - 10	119	43	25	48	14	17.5	12	0.5
GPCSS298	298	20	11 - 13	140	52	30	58	18	23.5	15	0.72
GPCSS299	299	25	14 - 16	162	68	37	66	21	26	17.5	1.47

Product Code	Number	M.B.L. t	Wire Rope Dia mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kgs
GPCSS200	200	45	18 - 19	194	76	42	78	27	32	21.5	2.24
GPCSS201	201	70	20 - 22	224	92	47	90	33	38	24	4.2
GPCSS204	204	85	23 - 26	253	104	57	103	36	44	28	6.03
GPCSS207	207	105	27 - 30	282	114	63	116	39	51	32	7.85
GPCSS212	212	136	31 - 36	312	127	70	130	43	57	38	10.8
GPCSS215	215	150	37 - 39	358	136	79	155	51	63	41	13.6
GPCSS217	217	170	40 - 42	390	146	83	171	54	70	44	17
GPCSS219	219	225	43 - 48	443	171	93	198	55	76	51	26
GPCSS222	222	280	49 - 54	502	193	100	224	62	82	57	37.5
GPCSS224	224	360	55 - 60	548	216	112	247	73	92	63	54.5
GPCSS226	226	425	61 - 68	597	241	140	270	70	102	73	69.5
GPCSS227	227	460	69 - 75	644	273	159	286	70	124	79	100
GPCSS228	228	560	76 - 80	686	292	171	298	83	133	86	121
GPCSS229	229	625	81 - 86	743	311	184	311	102	146	92	156
GPCSS230	230	720	87 - 93	788	330	197	330	102	159	99	181
GPCSS231	231	875	94 - 102	845	362	216	356	108	178	108	210
GPCSS233	233	1,200	108 - 115	1000	405	235	425	125	190	125	334
GPCSS240	240	1,300	120 - 130	1150	450	260	525	125	200	143	500