


Green Pin® Grade 10 Needle Bearing Swivel Eye/Eye – GPG10SEE

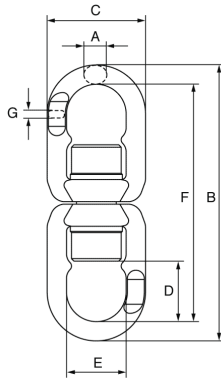

- Alloy steel, quenched and tempered.
- Blue painted finish.
- Minimum breaking load is 4 times the W.L.L.
- Temperature range -40°C to +200°C.
- 2 needle roller thrust bearings for rotation under load.
- Marked with CE, W.L.L, material grade, manufacturers ID, size, product ID mark and traceability code.
- Certification available **2.1** **3.1** **MTC** **DoC**

UELR

Product Code	Chain Dia	W.L.L. t	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kgs
GPG10SEE11	6	1.4	11	150	56	33	32	126	6	0.61
GPG10SEE14	8	2.6	14	181	65	40	37	153	8	1.07

Product Code	Chain Dia	W.L.L. t	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kgs
GPG10SEE18	10	4	18	226	79	47	48	195	11	1.9
GPG10SEE20	13	6.8	20	268	96	59	58	227	14	3.17
GPG10SEE23	16	10.3	23	331	121	67	73	281	17	6.44
GPG10SEE28	20	16	28	378	132	88	82	328	22	7.75