

Kawasaki Versys Handlebar Riser Installation Instructions

Thank you for purchasing our handlebar riser!

Items included in the kit



Riser



Four M-8 Socket Head Cap Screws

Tools needed for installation

- 6 mm Allen (hex) wrench
- a small flat screwdriver (optional)

Installation Instructions

- 1) Remove **four plastic screw caps** with a small screwdriver or by hand, and keep them for the future



- 2) Unscrew the four handlebar screws with the 6 mm Allen wrench, as shown




- 3) Place a towel on the tank area to protect it and pull back the handlebar assembly, as shown



- 4) Position the handlebar riser as shown, so the top holes are spread further apart than bottom ones



- 5) Insert the handlebar riser in between the two existing handlebar assembly parts as shown

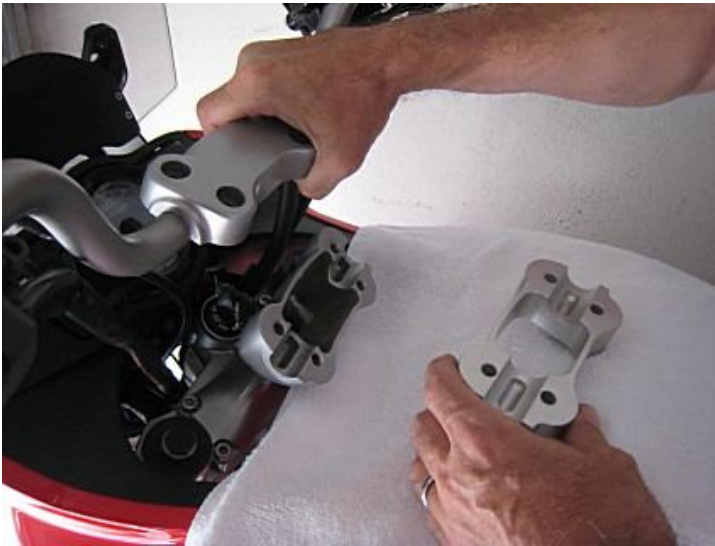

- 6) Screw the two M-8 screws provided into the top holes with the 6 mm Allen wrench, as shown



- 7) Screw the two M-8 screws provided into the bottom holes with the 6 mm Allen wrench, as shown



- 8) Tighten all the **M-8 Socket Head Cap Screws** with the 6 mm hex wrench at medium strength, or if you have a torque wrench then tighten it at 25 N/m (2.5 kgf/m), (18 ft/lb). Now, re-insert the plastic screw caps. The installation is complete.

