



MODEL #: GN2225-6X12-8-X



THROUGH THE WALL DEPOSITORY SAFE WITH MAIL-STYLE DEPOSITORY MODULE
 HEAVY 12 GAUGE BODY CONSTRUCTION MESAURES 25"H X 12"W X 12"D.
 6"X 12" DEPOSITORY MODULE EXTENDING 8" WITH 11" RISER THROAT, WITH ALUMINUM PULL HANDLE.
 (MAX DEPOSIT SIZE: 4-1/2" X 11" X 9")
 9-1/2" X 9-1/2" ACCESS DOOR CONSTRUCTED OF 3/8" STEEL PLATE AND EQUIPPED WITH CHOICE OF LOCK.
 X= SPECIFY LOCK


- K- DUAL CUSTODY SAFE DEPOSIT LOCK – INCLUDES (2) OPERATOR KEYS AND (1) MANAGER/GUARD KEY.
- C- LAGARD/KABA GROUP II MECHANICAL COMBINATION LOCK.
- E- SECURAM SAFELOGIC SINGLE USER DIGITAL ELECTRONIC LOCK.
- EM- SECURAM PROLOGIC LO2 MULTI-USER DIGITAL ELECTRONIC LOCK.

STANDARD FEATURES:
 TRIPLE ANTI-FISH BAFFLE
 FOUR 3/8" MOUNTING HOLES IN BOTTOM
 EXTERIOR FINISH FLANGE
 BLACK TEXTURED POWDER COAT FINISH.

OPTIONAL ACCESSORIES

PV-PED121212 12" PEDESTAL

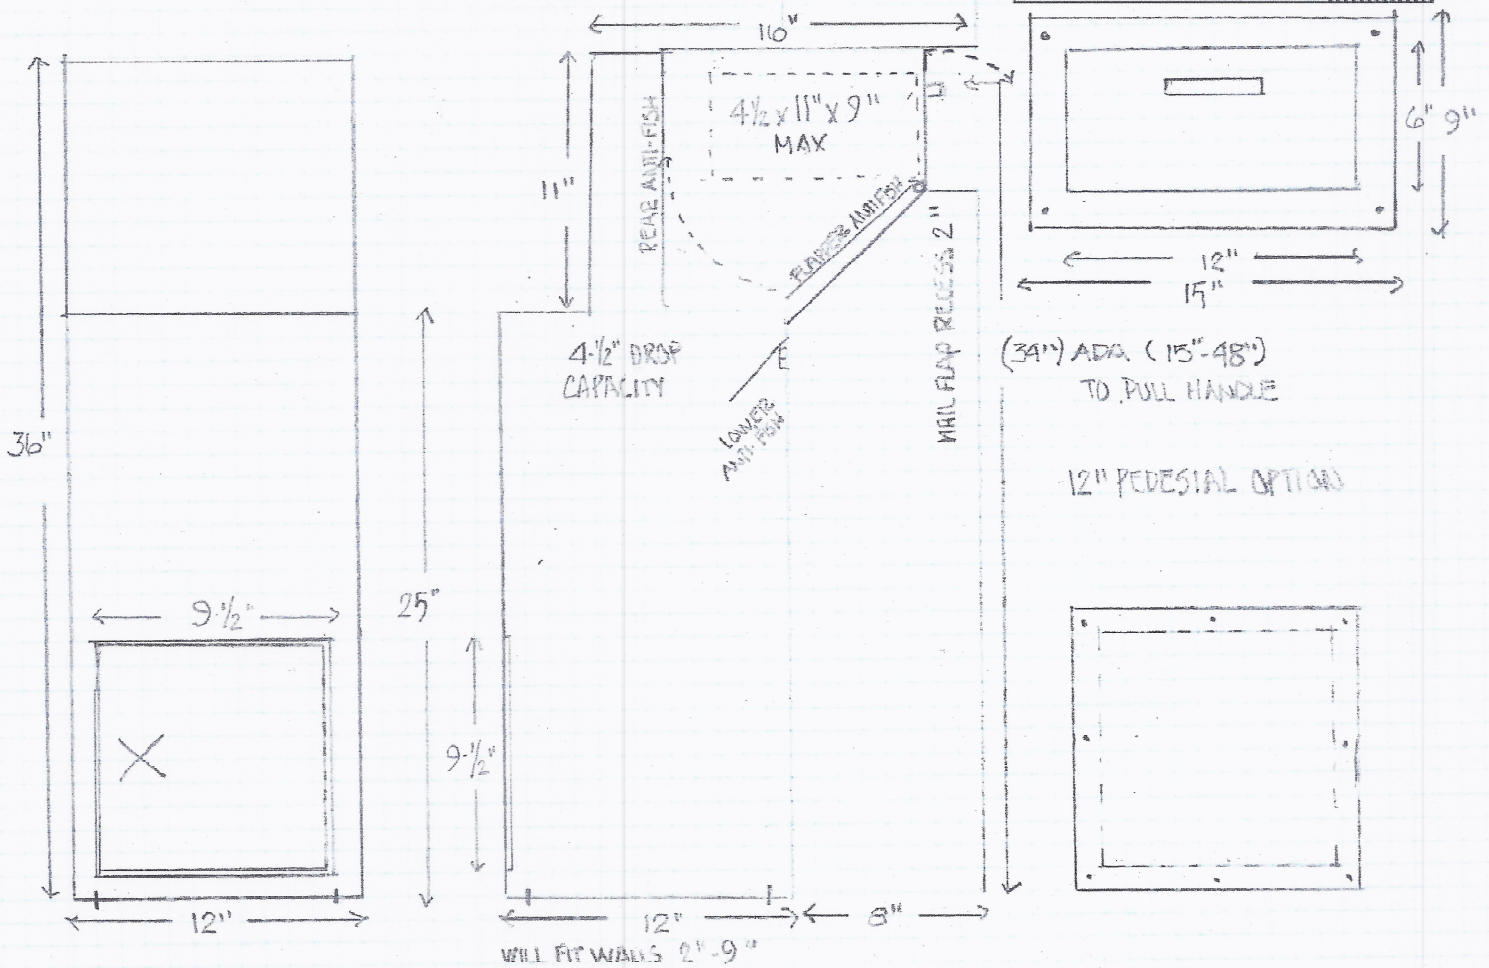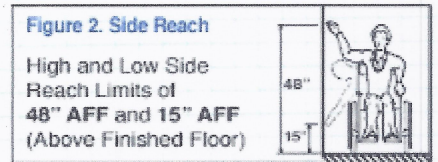



General Installation Instructions

Check to see that location is void of any electrical wiring or other hazards.

**Measure, mark and cut a rough opening 6-1/2" x 12-1/2" on the exterior wall
At desired location.**

**Mark and cut opening on interior wall to allow for module to be inserted through
The exterior opening.**

**Once in place, mark and mount the drop box/safe with appropriate hardware.
(not included).**

**On the exterior, slide telescoping flange over opening in depository module.
Mark flange mounting holes. Epoxy around perimeter of opening and mount flange
using appropriate hardware.**

Apply signage, if applicable.

**We recommend applying epoxy under and around all exposed areas
to provide weather guard and reduce prying.**