


# Level II RSC

Burglary Ratings

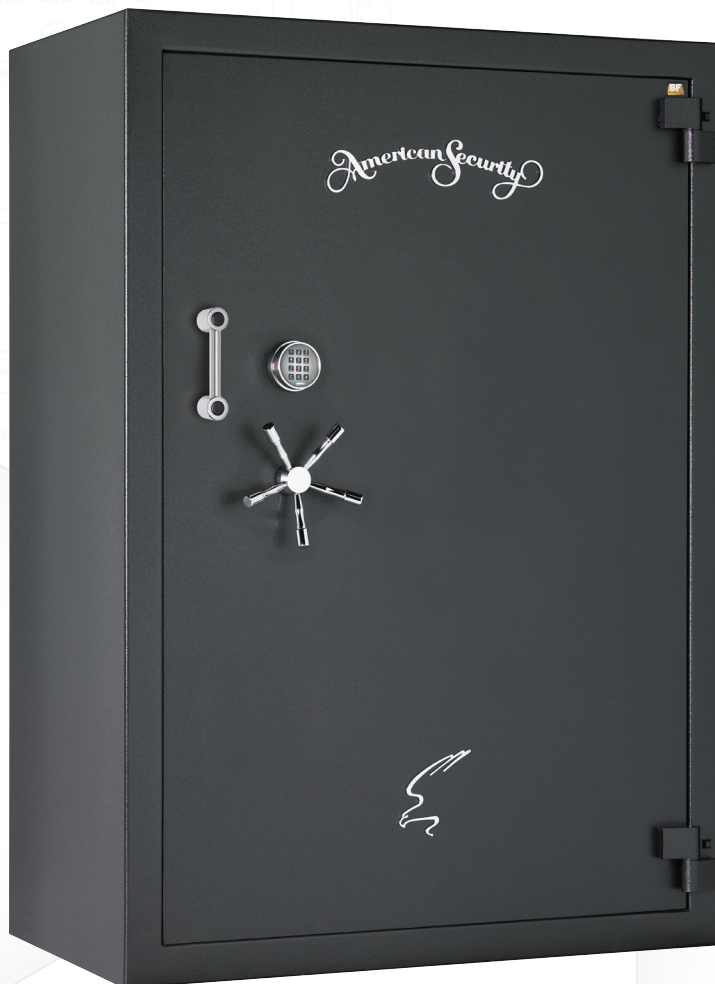

The best burglary safe Performance Ratings have been established by Underwriters Laboratories (UL). U.L. has been testing products and writing safety standards for more than a century. The most common security ratings range from the U.L. Residential Security Container (RSC) to the U.L. TL-15, TL-30 and TL30x6 high security burglary ratings.

U.L. has recently introduced a higher security level to the RSC ratings. The new RSC Level II Burglary Rating has a 10 minute test period and utilizes a two man team with the same tool complement as a TL-15 high security rating. AMSEC BFII Series Gun Safes exceed all U.L. RSC Level II requirements.


## AMSEC's BFII Series Gun Safe Features:

- All models have a ½" solid steel plate door
- All models have a combined steel thickness of nearly ½" in body construction
- AMSEC's patented active hardplate
- AMSEC's high security TL-15 boltwork
- 5-year parts and labor warranty when purchased with a factory installed AMSEC lock.
- Special lifetime warranty for damage from burglary attempts and fire.

# AMSEC BFI SERIES GUN SAFES EXCEED ALL U.L. LEVEL II RSC REQUIREMENTS

## U.L. RSC LEVEL II PERFORMANCE REQUIREMENTS

The safe successfully resists entry by a two man team for a net working time of 10 minutes when attacked with rigorous prying, drilling, punching, chiseling, and tampering by UL safe technicians.

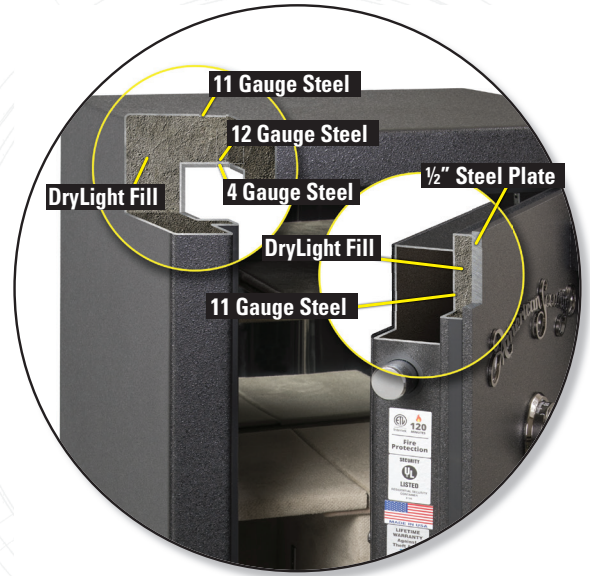

## TOOL SELECTION

RSC Level I (1-Man, 5 minute test. Utilizes tools typically found in a household)	RSC Level II (2-man Team, 10 minute test. Utilizes same tools as a TL-15 test)
1/4" Dia Punch	1/2" Dia Punch
Sledge Hammer 3 lb	Sledge Hammer 10 lb
Crow Bar, 18"	Pry Bar, 6 ft
Chisel 1/2"	Chisel 1" Wide x 12" L
Screw Driver 18	Screw Driver 18
1/4" Drill Bits	1/2" Drill Bits
3/8" Drill	1/2" HD Drill
	Pick, 30"
	Axe, 35"
	4" Conic Punch
	Hole Saw, 3" Carbide
	Pin Hammer
	Wedge, Log Splitting
	Punch/Chisel Holder

**RSC LEVEL I TOOL COMPLEMENT**



**RSC LEVEL II TOOL COMPLEMENT**

