


Simplex Pushbutton Lock Instructions

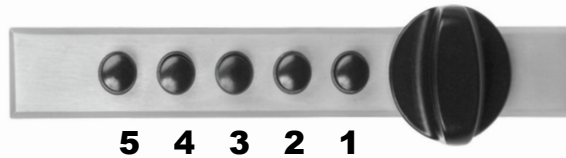


YOUR happiness matters to us here at V-Line Industries!
Please call us for assistance before you consider returning your product.
(805) 520 - 4987

Initial Opening with Factory Code

- 1) Turn the Knob LEFT (counter-clockwise) until it stops and release.
- 2) Push the 2&4 buttons at the same time then release, next press the 3 button and release.
- 3) Turn Knob RIGHT (clockwise) to open.

To Lock

- 1) Shut the door or lid and turn the Knob to the left.

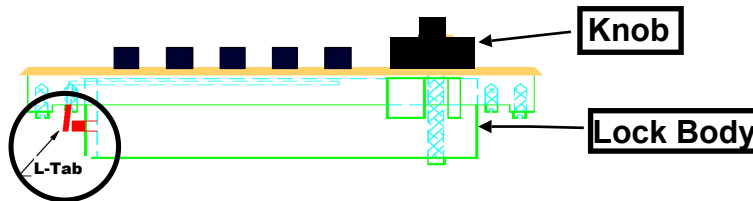

TO CHANGE YOUR COMBINATION

You may easily change to a new combination, using one, all five, or any number of buttons you wish in any order. Two or more buttons may be pushed at one time as part of your new combination. Simple two and three button combinations are easy to remember and still provide top security. **VERY IMPORTANT: DO NOT use the same number more than once in your combination.**

- 1) Turn Knob **LEFT** (Counter Clockwise).
- 2) Press the buttons for **EXISTING** combination.
- 3) Push the “**L**” **TAB** into the **Lock Body**. **See diagram above.**
- 4) Turn the Knob **LEFT** (counter-clockwise).
- 5) Enter the **NEW** desired combination.
- 6) Turn knob **RIGHT** (clockwise) to set your new combination .

Lock Maintenance : Check the 4- screws on the lock for tightness if heavily used or installed in vehicle. The Screws are located on the **INSIDE** of the safe on the back of the lock. Two screws on each side - Make sure they are tight.

→ **Video on changing the Lock Combination.**

Video Link: <https://www.youtube.com/watch?v=L645vQ1iUhg>

WARNING: NEVER STORE FIREARMS AND AMMUNITION TOGETHER
THE SAFEST PROTECTION AGAINST ACCIDENTS INVOLVING CHILDREN
IS TO STORE YOUR FIREARM UNLOADED IN AN APPROVED FIREARM
SAFETY LOCK BOX, WITH THE AMMUNITION STORED SEPARATELY.



V-Line Industries Inc.