





ENERG  
енергия · ενεργεια


Y IJA  
IE IA



Indoor unit E\*ST20D-\*\*\*\*D  
Outdoor unit PUD-SHWM120VAA(-BS)

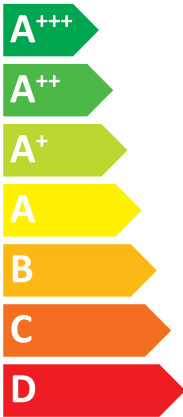

A++

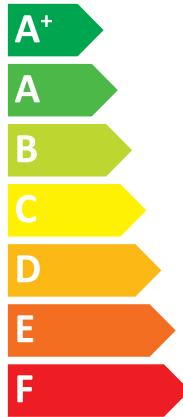

A+



41 dB

60 dB



- 12 kW
- 12 kW
- 12 kW

2019

811/2013

BH79V003H08



## Mitsubishi Electric ErP Directive Related Product Information: erp.mitsubishielectric.eu/erp

		For medium-temperature application.												For low-temperature application.																													
1	2	3	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
PUD-SWM60VAA(BS)	EHST17D-****	✓	A++	A+	6.0	3618	798	130	136	41	-	6.0	6.0	4923	2065	968	709	109	148	112	154	55	✓	A+++	A+	6.0	2672	798	175	136	41	-	6.0	6.0	4012	1489	968	709	133	205	112	154	55
	ERST17D-****	✓	A++	A+	6.0	3618	798	130	136	41	-	6.0	6.0	4923	2065	968	709	109	148	112	154	55	✓	A+++	A+	6.0	2672	798	175	136	41	-	6.0	6.0	4012	1489	968	709	133	205	112	154	55
	EHST20D-****	✓	A++	A+	6.0	3618	736	130	148	41	-	6.0	6.0	4923	2065	900	675	109	148	120	162	55	✓	A+++	A+	6.0	2672	736	175	148	41	-	6.0	6.0	4012	1489	900	675	133	205	120	162	55
	ERST20D-****	✓	A++	A+	6.0	3618	736	130	148	41	-	6.0	6.0	4923	2065	900	675	109	148	120	162	55	✓	A+++	A+	6.0	2672	736	175	148	41	-	6.0	6.0	4012	1489	900	675	133	205	120	162	55
	EHST30D-****	✓	A++	A	6.0	3618	1431	130	121	41	-	6.0	6.0	4923	2065	1700	1203	109	148	102	145	55	✓	A+++	A	6.0	2672	1431	175	121	41	-	6.0	6.0	4012	1489	1700	1203	133	205	102	145	55
	ERST30D-****	✓	A++	A	6.0	3618	1431	130	121	41	-	6.0	6.0	4923	2065	1700	1203	109	148	102	145	55	✓	A+++	A	6.0	2672	1431	175	121	41	-	6.0	6.0	4012	1489	1700	1203	133	205	102	145	55
PUD-SWM80VAA(BS)	EHST17D-****	✓	A++	A+	8.0	4814	798	131	136	41	-	8.0	8.0	6507	2554	968	709	110	161	112	154	56	✓	A+++	A+	8.0	3529	798	178	136	41	-	8.0	8.0	5083	1879	968	709	139	218	112	154	56
	ERST17D-****	✓	A++	A+	8.0	4814	798	131	136	41	-	8.0	8.0	6507	2554	968	709	110	161	112	154	56	✓	A+++	A+	8.0	3529	798	178	136	41	-	8.0	8.0	5083	1879	968	709	139	218	112	154	56
	EHST20D-****	✓	A++	A+	8.0	4814	736	131	148	41	-	8.0	8.0	6507	2554	900	675	110	161	120	162	56	✓	A+++	A+	8.0	3529	736	178	148	41	-	8.0	8.0	5083	1879	900	675	139	218	120	162	56
	ERST20D-****	✓	A++	A+	8.0	4814	736	131	148	41	-	8.0	8.0	6507	2554	900	675	110	161	120	162	56	✓	A+++	A+	8.0	3529	736	178	148	41	-	8.0	8.0	5083	1879	900	675	139	218	120	162	56
	EHST30D-****	✓	A++	A	8.0	4814	1431	131	121	41	-	8.0	8.0	6507	2554	1700	1203	110	161	102	145	56	✓	A+++	A	8.0	3529	1431	178	121	41	-	8.0	8.0	5083	1879	1700	1203	139	218	102	145	56
	ERST30D-****	✓	A++	A	8.0	4814	1431	131	121	41	-	8.0	8.0	6507	2554	1700	1203	110	161	102	145	56	✓	A+++	A	8.0	3529	1431	178	121	41	-	8.0	8.0	5083	1879	1700	1203	139	218	102	145	56
PUD-SWM100VAA(BS)	EHST17D-****	✓	A++	A+	10.0	6040	736	131	148	41	-	10.0	10.0	8290	3390	900	675	109	159	112	154	56	✓	A+++	A+	10.0	4441	736	176	136	41	-	10.0	10.0	5083	1879	968	709	138	215	112	154	56
	ERST17D-****	✓	A++	A+	10.0	6040	736	131	148	41	-	10.0	10.0	8290	3390	900	675	109	159	112	154	56	✓	A+++	A+	10.0	4441	736	176	136	41	-	10.0	10.0	5083	1879	968	709	138	215	112	154	56
	EHST20D-****	✓	A++	A+	10.0	6040	736	130	148	41	-	10.0	10.0	8290	3390	900	675	109	159	120	162	56	✓	A+++	A+	10.0	4441	736	176	148	41	-	10.0	10.0	5083	1879	900	675	138	215	120	162	56
	ERST20D-****	✓	A++	A+	10.0	6040	736	130	148	41	-	10.0	10.0	8290	3390	900	675	109	159	120	162	56	✓	A+++	A+	10.0	4441	736	176	148	41	-	10.0	10.0	5083	1879	900	675	138	215	120	162	56
	EHST30D-****	✓	A++	A	10.0	6040	1431	131	121	41	-	10.0	10.0	8290	3390	1700	1203	109	159	102	145	56	✓	A+++	A	10.0	4441	1431	176	121	41	-	10.0	10.0	5083	1879	1700	1203	138	215	102	145	56
	ERST30D-****	✓	A++	A	10.0	6040	1431	131	121	41	-	10.0	10.0	8290	3390	1700	1203	109	159	102	145	56	✓	A+++	A	10.0	4441	1431	176	121	41	-	10.0	10.0	5083	1879	1700	1203	138	215	102	145	56
PUD-SWM120VAA(BS)	EHST17D-****	✓	A++	A+	12.0	7377	736	129	148	41	-	12.0	12.0	9994	4128	900	675	109	150	120	162	60	✓	A+++	A+	12.0	5371	736	177	148	41	-	12.0	12.0	7717	2864	900	675	140	217	120	162	60
	ERST17D-****	✓	A++	A+	12.0	7377	736	129	148	41	-	12.0	12.0	9994	4128	900	675	109	150	120	162	60	✓	A+++	A+	12.0	5371	736	177	148	41	-	12.0	12.0	7717	2864	900	675	140	217	120	162	60
	EHST20D-****	✓	A++	A+	12.0	7377	736	129	148	41	-	12.0	12.0	9994	4128	900	675	109	150	120	162	60	✓	A+++	A+	12.0	5371	736	177	148	41	-	12.0	12.0	7717	2864	900	675	140	217	120	162	60
	ERST20D-****	✓	A++	A+	12.0	7377	736	129	148	41	-	12.0	12.0	9994	4128	900	675	109	150	120	162	60	✓	A+++	A+	12.0	5371	736	177	148	41	-	12.0	12.0	7717	2864	900	675	140	217	120	162	60
	EHST30D-****	✓	A++	A	12.0	7377	1431	129	121	41	-	12.0	12.0	9994	4128	1700	1203	109	150	102	145	60	✓	A+++	A	12.0	5371	1431	177	121	41	-	12.0	12.0	7717	2864	1700	1203	140	217	102	145	60
	ERST30D-****	✓	A++	A	12.0	7377	1431	129	121	41	-	12.0	12.0	9994	4128	1700	1203	109	150	102	145	60	✓	A+++	A	12.0	5371	1431	177	121	41	-	12.0	12.0	7717	2864	1700	1203	140	217	102	145	60
PUD-SHM60VAA(BS)	EHST17D-****	✓	A++	A+	6.0	3535	798	134	136	41	-	6.0	6.0	4776	1919	968	709	113	159	112	154	55	✓	A+++	A+	6.0	2649	798	178	136	41	-	6.0	6.0	3903	1385	968	709	138	220	112	154	55
	ERST17D-****	✓	A++	A+	6.0	3535	798	134	136	41	-	6.0	6.0	4776	1919	968	709	113	159	112	154	55	✓	A+++	A+	6.0	2649	798	178	136	41	-	6.0	6.0	3903	1385	968	709	138	220	112	154	55
	EHST20D-****	✓	A++	A+	6.0	3535	736	134	148	41	-	6.0	6.0	4776	1919	900	675	113	159	120	162	55	✓	A+++	A+	6.0	2649	736	178	148	41	-	6.0	6.0	3903	1385	900	675	138	220	120	162	55
	ERST20D-****	✓	A++	A+	6.0	3535	736	134	148	41	-	6.0	6.0	4776	1919	900	675	113	159	120	162	55	✓	A+++	A+	6.0	2649	736	178	148	41	-	6.0	6.0	3903	1385	900	675	138	220	120	162	55
	EHST30D-****	✓	A++	A	6.0	3535	1431	134	121	41	-	6.0	6.0	4776	1919	1700	1203	113	159	102	145	55	✓	A+++	A	6.0	2649	1431	178	121	41	-	6.0	6.0	3903	1385	1700	1203	138	220	102	145	55
	ERST30D-****	✓	A++	A	6.0	3535	1431	134	121	41	-	6.0	6.0	4776	1919	1700	1203	113	159	102	145	55	✓	A+++	A	6.0	2649	1431	178	121	41	-	6.0	6.0	3903	1385	1700	1203	138	220	102	145	55
PUD-SHM80VAA(BS)	EHST17D-****	✓	A++	A+	8.0	4895	798	134	136	41	-	8.0	8.0	6335	2479	968	709	113	164	112	154	56	✓	A+++	A+	8.0	3500	798	179	136	41	-	8.0	8.0	4934	1820	968	709	143	222	112	154	56
	ERST17D-****	✓	A++	A+	8.0	4895	798	134	136	41	-	8.0	8.0	6335	2479	968	709	113	164	112	154	56	✓	A+++	A+	8.0	3500	798	179	136	41	-	8.0	8.0	4934	1820	968	709	143	222	112	154	56
	EHST20D-****	✓	A++	A+	8.0	4895	736	135	148	41	-	8.0	8.0	6335	2479	900	675	114	166	120	162	56	✓	A+++	A+	8.0	3500	736															

English	Deutsch	Français	Italiano	Espanol
Nederlands	Svenska	Polski	Português	Ελληνικά
suomi	Čeština	Български	PolSKI	Ελληνικά
Outdoor unit	Außengerät	unit extérieure	unità esterna	unidad exterior
1 built-in unit	Utløst enhed	Utløst enhed	unità esteriore	Εξωτερική μονάδα
Ulkokotkko	Vaikovi/ Jedinika	Выходь тило	jednostka zewnętrzna	μονάδα εξωτερική
Indoor unit	Innengerät	unit intérieure	unità interna	unidad interior
2 binnenunit	Innenventil	Innenventil	unità interiore	Εσωτερική μονάδα
Sisäyksyksikö	Vahinli Jedinika	Вътрешно тило	jednostka wewnętrzna	μονάδα εσωτερική
Mediun-temperatuur applicatie	Middeltemperatuurtoepassing	Используется в умеренной температуре	la aplicación a media temperatura	la aplicación de media temperatura
3 keskilämpötilan sovellus	Middeltemperatuurtoepassing	среднетемпературното приложение	zasosowanie w umiarkowanej temperaturze	η εφαρμογή σε μέτρια θερμοκρασία
Low-temperature application	Lage temperatuurtoepassing	Используется в низкой температуре	la aplicación a baja temperatura	η εφαρμογή σε χαμηλή θερμοκρασία
4 laagtemperatuurtoepassing	lagtemperatuurtoepassing	используется в низкой температуре	a aplicacão a baixa temperatura	η εφαρμογή σε χαμηλή θερμοκρασία
Seasonal space heating energy efficiency class	die Klasse für die jahreszeitbedingte Raumheizungs-Energieeffizienz	la classe d'efficacité énergétique saisonnière, pour le chauffage des locaux	la classe de efficienza energética estacional del riscaldamento d'ambiente	la classe de eficiencia energética estacional de calefacción
5 de seizsoverdonen energie-efficiëntieklasse voor ruimteverwarming	seizoensgebonden energie-efficiëntieklasse voor ruimteverwarming	Klassen für Aspektingraden ved uopvarmning	A classe de eficiência energética do aquecimento ambiente sazonal	η τάξη ενεργειακής απόδοσης, της εποχικής θέρμανσης χώρου
Itäalimittiyksikäi kasvatusten energiatuokkuluokkia	Itäalimittiyksikäi kasvatusten energiatuokkuluokkia	Классы сезонов энергетической эффективности для выращивания растений	Klasa sezonowa efektywności energetycznej uprawiania roślin	η ενεργειακή απόδοση θέρμανσης χώρου υπό χειμωτός κλιματικές συνθήκες
Waher heating energy efficiency class	Waher heating energy efficiency class	la classe d'efficacité énergétique, pour le chauffage de l'eau	la classe de eficiência energética del riscaldamento dell'acqua	la classe de eficiencia energética del calentamiento de agua
6 de energie-efficiëntieklasse voor waterverwarming	de energie-efficiëntieklasse voor waterverwarming	Klassen for Aspektingrad ved uopvarmning	A classe de eficiência energética do aquecimento de água	la clase de eficiencia energética de calefacción en condiciones climáticas medias
Verderlimittiyksikäi energiatuokkuluokkia	Verderlimittiyksikäi energiatuokkuluokkia	Классы на энергетическую эффективность при подогреве на вода	Klasa efektywności energetycznej podgrzewania wody	la potencia calorífica nominal(en condiciones climáticas medias)
Ratid heel odfurt under average climate conditions	Ratid heel odfurt under average climate conditions	la puissance thermique nominale dans les conditions climatiques moyennes	A potencia térmica nominal(en condiciones climáticas medias)	η ονομαστική θερμική ισχύς(υπό μέτριας κλιματικής συνθήκης)
de nominale vermogen bij gemiddelde klimaatomstandigheden	de nominale vermogen bij gemiddelde klimaatomstandigheden	la puissance thermique nominale dans les conditions climatiques moyennes	la puissance thermique nominale dans les conditions climatiques moyennes	-
7 de nominale vermogen bij gemiddelde klimaatomstandigheden	de nominale vermogen bij gemiddelde klimaatomstandigheden	pour le chauffage des locaux, la consommation annuelle d'énergie(dans les conditions climatiques moyennes)	per il riscaldamento d'ambiente, il consumo annuo di energia(in condizioni climatiche medie)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	for uopvarmning del årlige energiforbrug(under gennemsnitlige klimaforhold)	Per il riscaldamento d'ambiente, il consumo annuo di energia(in condizioni climatiche medie)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
8 voor ruimteverwarming, het jaarlijkse energieverbruik(onder gemiddelde klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik(onder gemiddelde klimaatomstandigheden)	za otopenie, podzimního poorebienie na energii(при средних климатични условия)	w odniewieniu do ogrzewania pomieszczeń, roczne zużycie energii(w warunkach klimatu umiarkowanego)	-
Itäalimittiyksikäi vuorilinen energiatuokkuluokkia(Innasto-olosuhteissa)	Itäalimittiyksikäi vuorilinen energiatuokkuluokkia(Innasto-olosuhteissa)	pour le chauffage de l'eau, la consommation annuelle d'électricité(dans les conditions climatiques moyennes)	per il riscaldamento dell'acqua, il consumo annuo di energia(in condizioni climatiche medie)	para calefatar agua, el consumo anual de electricidad(en condiciones climáticas medias)
For water heating, annual electricity consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	pour le chauffage de l'eau, la consommation annuelle d'électricité(dans les conditions climatiques moyennes)	per il riscaldamento dell'acqua, il consumo annuo di energia(in condizioni climatiche medie)	para calefatar agua, el consumo anual de electricidad(en condiciones climáticas medias)
9 voor waterverwarming, het jaarlijkse elektriciteitsverbruik(onder gemiddelde klimaatomstandigheden)	voor waterverwarming, het jaarlijkse elektriciteitsverbruik(onder gemiddelde klimaatomstandigheden)	za otopenie, podzimního poorebienie na energii(при средних климатични условия)	w odniewieniu do podgrzewania wody, roczne zużycie energii elektrycznej(w warunkach klimatu umiarkowanego)	-
Verderlimittiyksikäi vuorilinen sähkökuutusluokkia(Innasto-olosuhteissa)	Verderlimittiyksikäi vuorilinen sähkökuutusluokkia(Innasto-olosuhteissa)	la puissance électrique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes)	la puissance électrique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes)	για την θέρμανση ύδατος, η ετήσια καταναλωμένη ηλεκτρική ενέργεια(υπό μέτριας κλιματικής συνθήκης)
Seasonal space heating energy efficiency under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	za otopenie, podzimního poorebienie na energii(при средних климатични условия)	la puissance électrique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes)	η ενεργειακή απόδοση της εποχικής θέρμανσης χώρου(υπό μέτριας κλιματικής συνθήκης)
10 de seizsoverdonen energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden)	de seizsoverdonen energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden)	сезонная энергия эффективност при отоплении(при средних климатични условия)	сезонная энергия эффективност при отоплении(при средних климатични условия)	la eficiencia energética del calentamiento de agua(en condiciones climáticas medias)
Itäalimittiyksikäi kasvatusten energiatuokkuluokkia(Innasto-olosuhteissa)	Itäalimittiyksikäi kasvatusten energiatuokkuluokkia(Innasto-olosuhteissa)	Классы эффективности выращивания растений(в умеренных условиях)	Классы эффективности выращивания растений(в умеренных условиях)	η ενεργειακή απόδοση θέρμανσης χώρου(υπό μέτριας κλιματικής συνθήκης)
Waher heating energy efficiency under average climate conditions	Waher heating energy efficiency under average climate conditions	la puissance électrique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes)	la puissance électrique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes)	-
11 de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden)	Классы эффективности при подогреве на вода(при средних климатични условия)	Классы эффективности при подогреве на вода(при средних климатични условия)	η ενεργειακή απόδοση θέρμανσης χώρου(υπό μέτριας κλιματικής συνθήκης)
Verderlimittiyksikäi energiatuokkuluokkia(Innasto-olosuhteissa)	Verderlimittiyksikäi energiatuokkuluokkia(Innasto-olosuhteissa)	la puissance électrique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes)	la puissance électrique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes)	η ενεργειακή απόδοση θέρμανσης χώρου(υπό μέτριας κλιματικής συνθήκης)
Sound power level L <sub>WA, indoor</sub>	Sound power level L <sub>WA, indoor</sub>	Уровневый показатель L <sub>WA, indoors</sub>	Уровневый показатель L <sub>WA, indoors</sub>	-
12 het geluidvermogenbinnen L <sub>WA, binnen</sub>	het geluidvermogenbinnen L <sub>WA, binnen</sub>	индексный показатель L <sub>WA, indoors</sub>	индексный показатель L <sub>WA, indoors</sub>	-
Aäniteho L <sub>WA, sisällä</sub>	Aäniteho L <sub>WA, sisällä</sub>	индексный показатель L <sub>WA, indoors</sub>	индексный показатель L <sub>WA, indoors</sub>	-
Waher omy dingng of-peak hours	Waher omy dingng of-peak hours	нагрузка в часы пик	нагрузка в часы пик	индексный показатель L <sub>WA, indoors</sub>
13 werken urenstijd in de daluren	werken urenstijd in de daluren	нагрузка в часы пик	нагрузка в часы пик	индексный показатель L <sub>WA, indoors</sub>
kolmanen aikavälien kuluvaajärjestelmä ulkoilmaolosuhteissa	kolmanen aikavälien kuluvaajärjestelmä ulkoilmaolosuhteissa	нагрузка в часы пик	нагрузка в часы пик	индексный показатель L <sub>WA, indoors</sub>
14 de nominale vermogen bij, onder koudeere klimaatomstandigheden	de nominale vermogen bij, onder koudeere klimaatomstandigheden	нагрузка в часы пик	нагрузка в часы пик	индексный показатель L <sub>WA, indoors</sub>
Itäalimittiyksikäi vuorilinen energiatuokkuluokkia(Innasto-olosuhteissa)	Itäalimittiyksikäi vuorilinen energiatuokkuluokkia(Innasto-olosuhteissa)	нагрузка в часы пик	нагрузка в часы пик	индексный показатель L <sub>WA, indoors</sub>
For space heating, annual energy consumption under warmer climate conditions	For space heating, annual energy consumption under warmer climate conditions	нагрузка в часы пик	нагрузка в часы пик	индексный показатель L <sub>WA, indoors</sub>
16 voor ruimteverwarming, het jaarlijkse energieverbruik(onder koudeere klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik(onder koudeere klimaatomstandigheden)	за отопление, подзимního поorebienie на энергии(при по-студенни климатични условия)	за отопление, подзимního поorebienie на энергии(при по-студенни климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
Itäalimittiyksikäi vuorilinen energiatuokkuluokkia(Innasto-olosuhteissa)	Itäalimittiyksikäi vuorilinen energiatuokkuluokkia(Innasto-olosuhteissa)	за отопление, подзимního поorebienie на энергии(при по-студенни климатични условия)	за отопление, подзимního поorebienie на энергии(при по-студенни климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
For space heating, annual energy consumption under warmer climate conditions	For space heating, annual energy consumption under warmer climate conditions	за отопление, подзимního поorebienie на энергии(при по-студенни климатични условия)	за отопление, подзимního поorebienie на энергии(при по-студенни климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
17 voor ruimteverwarming, het jaarlijkse energieverbruik(onder warmer klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik(onder warmer klimaatomstandigheden)	за отопление, подзимního поorebienie на энергии(при по-студенни климатични условия)	за отопление, подзимního поorebienie на энергии(при по-студенни климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
Itäalimittiyksikäi vuorilinen energiatuokkuluokkia(Innasto-olosuhteissa)	Itäalimittiyksikäi vuorilinen energiatuokkuluokkia(Innasto-olosuhteissa)	за отопление, подзимního поorebienie на энергии(при по-студенни климатични условия)	за отопление, подзимního поorebienie на энергии(при по-студенни климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
For water heating, annual energy consumption under colder climate conditions	For water heating, annual energy consumption under colder climate conditions	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus froides	pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus froides	para calefatar agua, el consumo anual de electricidad(en condiciones climáticas medias)
18 voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudeere klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudeere klimaatomstandigheden	за подогревание на вода, годишното потребление на електроенергия при по-студени климатични условия	за подогревание на вода, годишното потребление на електроенергия при по-студени климатични условия	para calefatar agua, el consumo anual de electricidad(en condiciones climáticas medias)
Verderlimittiyksikäi vuorilinen sähkökuutusluokkia(Innasto-olosuhteissa)	Verderlimittiyksikäi vuorilinen sähkökuutusluokkia(Innasto-olosuhteissa)	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	para calefatar agua, el consumo anual de electricidad(en condiciones climáticas medias)
For water heating, annual electricity consumption under warmer climate conditions	For water heating, annual electricity consumption under warmer climate conditions	за подогревание на вода, годишното потребление на електроенергия при по-студени климатични условия	за подогревание на вода, годишното потребление на електроенергия при по-студени климатични условия	para calefatar agua, el consumo anual de electricidad(en condiciones climáticas medias)
19 voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmer klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmer klimaatomstandigheden	за подогревание на вода, годишното потребление на електроенергия при по-студени климатични условия	за подогревание на вода, годишното потребление на електроенергия при по-студени климатични условия	para calefatar agua, el consumo anual de electricidad(en condiciones climáticas medias)
Verderlimittiyksikäi vuorilinen sähkökuutusluokkia(Innasto-olosuhteissa)	Verderlimittiyksikäi vuorilinen sähkökuutusluokkia(Innasto-olosuhteissa)	за подогревание на вода, годишното потребление на електроенергия при по-студени климатични условия	за подогревание на вода, годишното потребление на електроенергия при по-студени климатични условия	para calefatar agua, el consumo anual de electricidad(en condiciones climáticas medias)
Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under colder climate conditions	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
20 de seizsoverdonen energie-efficiëntie voor ruimteverwarming onder koudeere klimaatomstandigheden	de seizsoverdonen energie-efficiëntie voor ruimteverwarming onder koudeere klimaatomstandigheden	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
Itäalimittiyksikäi kasvatusten energiatuokkuluokkia(Innasto-olosuhteissa)	Itäalimittiyksikäi kasvatusten energiatuokkuluokkia(Innasto-olosuhteissa)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
Seasonal space heating energy efficiency under warmer climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
21 de seizsoverdonen energie-efficiëntie voor ruimteverwarming onder warmer klimaatomstandigheden	de seizsoverdonen energie-efficiëntie voor ruimteverwarming onder warmer klimaatomstandigheden	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
Itäalimittiyksikäi kasvatusten energiatuokkuluokkia(Innasto-olosuhteissa)	Itäalimittiyksikäi kasvatusten energiatuokkuluokkia(Innasto-olosuhteissa)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
Waher heating energy efficiency under colder climate conditions	Waher heating energy efficiency under colder climate conditions	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
22 de energie-efficiëntie voor waterverwarming onder koudeere klimaatomstandigheden	de energie-efficiëntie voor waterverwarming onder koudeere klimaatomstandigheden	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
Verderlimittiyksikäi energiatuokkuluokkia(Innasto-olosuhteissa)	Verderlimittiyksikäi energiatuokkuluokkia(Innasto-olosuhteissa)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
Waher heating energy efficiency under warmer climate conditions	Waher heating energy efficiency under warmer climate conditions	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
23 de energie-efficiëntie voor waterverwarming onder warmer klimaatomstandigheden	de energie-efficiëntie voor waterverwarming onder warmer klimaatomstandigheden	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
Verderlimittiyksikäi energiatuokkuluokkia(Innasto-olosuhteissa)	Verderlimittiyksikäi energiatuokkuluokkia(Innasto-olosuhteissa)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	за отопление, подзимního поorebienie на энергии(при по-холодных климатични условия)	para calefatar espacios, el consumo anual de energía(en condiciones climáticas medias)
Sound power level L <sub>WA, outdoor</sub>	Sound power level L <sub>WA, outdoor</sub>	Уровневый показатель L <sub>WA, outdoors</sub>	Уровневый показатель L <sub>WA, outdoors</sub>	η ονομαστική θερμική ισχύς, υπό χειμωτός κλιματικές συνθήκες
het geluidvermogenbuiten L <sub>WA, buiten</sub>	het geluidvermogenbuiten L <sub>WA, buiten</sub>	индексный показатель L <sub>WA, outdoors</sub>	индексный показатель L <sub>WA, outdoors</sub>	η ονομαστική θερμική ισχύς, υπό χειμωτός κλιματικές συνθήκες
Aäniteho L <sub>WA, ulkona</sub>	Aäniteho L <sub>WA, ulkona</sub>	индексный показатель L <sub>WA, outdoors</sub>	индексный показатель L <sub>WA, outdoors</sub>	η ονομαστική θερμική ισχύς, υπό χειμωτός κλιματικές συνθήκες

Model(s):	Outdoor unit:	PUD-SHWM120VAA
	Indoor unit:	EHST20D-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters shall be declared for		medium-temperature application.
Parameters shall be declared for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.0	kW	Seasonal space heating energy efficiency	$\eta_s$	135	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	10.6	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.14	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	6.5	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.25	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	5.3	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.82	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.3	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.94	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	12.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.87	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	9.2	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.56	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-10	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	7068	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	$\eta_{wh}$	148	%
Daily electricity consumption	Q <sub>elec</sub>	3.300	kWh				
Annual electricity consumption	AEC	736	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUD-SHWM120VAA
	Indoor unit:	EHST20D-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters shall be declared for		low-temperature application.
Parameters shall be declared for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.0	kW	Seasonal space heating energy efficiency	$\eta_s$	179	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	10.6	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.85	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	6.5	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.51	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.89	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	8.00	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	12.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.77	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	9.2	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.56	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-10	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	5354	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	$\eta_{wh}$	148	%
Daily electricity consumption	Q <sub>elec</sub>	3.300	kWh				
Annual electricity consumption	AEC	736	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUD-SHWM120VAA
	Indoor unit:	EHST20D-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters shall be declared for		medium-temperature application.
Parameters shall be declared for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.0	kW	Seasonal space heating energy efficiency	$\eta_s$	115	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	7.3	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.56	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.19	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	3.8	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.58	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.88	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	10.1	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.52	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	9.2	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.56	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	10.2	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	1.52	-
Bivalent temperature	T <sub>biv</sub>	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	2.4	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	9563	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	$\eta_{wh}$	162	%
Daily electricity consumption	Q <sub>elec</sub>	3.100	kW/h				
Annual electricity consumption	AEC	675	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUD-SHWM120VAA
	Indoor unit:	EHST20D-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters shall be declared for		low-temperature application.
Parameters shall be declared for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.0	kW	Seasonal space heating energy efficiency	$\eta_s$	149	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	7.3	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.67	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	4.5	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.02	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	3.9	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.34	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	5.5	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.43	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	10.1	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.10	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	9.2	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.56	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	10.2	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	2.15	-
Bivalent temperature	T <sub>biv</sub>	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	2.4	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	7333	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	162	%	
Daily electricity consumption	Q <sub>elec</sub>	3.100	kW/h				
Annual electricity consumption	AEC	675	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUD-SHWM120VAA
	Indoor unit:	EHST20D-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters shall be declared for		medium-temperature application.
Parameters shall be declared for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.0	kW	Seasonal space heating energy efficiency	$\eta_s$	159	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	12	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	2.03	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	7.7	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	3.35	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	5.2	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.59	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	1.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	0.96	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	9.2	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.56	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	5.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	3901	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	$\eta_{wh}$	120	%
Daily electricity consumption	Q <sub>elec</sub>	4.100	kW/h				
Annual electricity consumption	AEC	900	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.



Model(s):	Outdoor unit:	PUD-SHWM120VAA
	Indoor unit:	EHST20D-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters shall be declared for		low-temperature application.
Parameters shall be declared for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.0	kW	Seasonal space heating energy efficiency	$\eta_s$	231	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	12	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.30	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	7.7	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.17	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.46	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	1.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.00	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	9.2	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.56	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	5.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	2688	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	120	%	
Daily electricity consumption	Q <sub>elec</sub>	4.100	kW/h				
Annual electricity consumption	AEC	900	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUD-SHWM120VAA
	Indoor unit:	ERST20D-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters shall be declared for		medium-temperature application.
Parameters shall be declared for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.0	kW	Seasonal space heating energy efficiency	$\eta_s$	135	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	10.6	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.14	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	6.5	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.25	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	5.3	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.82	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.3	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.94	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	12.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.87	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	9.2	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.56	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-10	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	7068	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	$\eta_{wh}$	148	%
Daily electricity consumption	Q <sub>elec</sub>	3.300	kW/h				
Annual electricity consumption	AEC	736	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUD-SHWM120VAA
	Indoor unit:	ERST20D-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters shall be declared for		low-temperature application.
Parameters shall be declared for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.0	kW	Seasonal space heating energy efficiency	$\eta_s$	179	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	10.6	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.85	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	6.5	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.51	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	5.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.89	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	8.00	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	12.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.77	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	9.2	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.56	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-10	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	5354	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	$\eta_{wh}$	148	%
Daily electricity consumption	Q <sub>elec</sub>	3.300	kW/h				
Annual electricity consumption	AEC	736	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUD-SHWM120VAA
	Indoor unit:	ERST20D-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters shall be declared for		medium-temperature application.
Parameters shall be declared for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.0	kW	Seasonal space heating energy efficiency	$\eta_s$	115	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	7.3	kW	Tj = - 7 °C	COPd	2.56	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 2 °C	Pdh	4.4	kW	Tj = + 2 °C	COPd	3.19	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 7 °C	Pdh	3.8	kW	Tj = + 7 °C	COPd	4.58	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	4.4	kW	Tj = +12 °C	COPd	6.88	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	10.1	kW	Tj = bivalent temperature	COPd	1.52	-
Tj = operation limit temperature	Pdh	9.2	kW	Tj = operation limit temperature	COPd	1.56	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	10.2	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	1.52	-
Bivalent temperature	Tbiv	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	2.4	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41/60	dB(A)
Annual energy consumption	Q <sub>HE</sub>	9563	kWh
Rated air flow rate, outdoors		2640	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q <sub>elec</sub>	3.100	kWh
Annual electricity consumption	AEC	675	kWh
Water heating energy efficiency	$\eta_{wh}$	162	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUD-SHWM120VAA
	Indoor unit:	ERST20D-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters shall be declared for		low-temperature application.
Parameters shall be declared for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.0	kW	Seasonal space heating energy efficiency	$\eta_s$	149	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	7.3	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.67	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	4.5	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.02	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	3.9	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.34	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	5.5	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.43	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	10.1	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.10	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	9.2	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.56	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	10.2	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	2.15	-
Bivalent temperature	T <sub>biv</sub>	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	2.4	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	7333	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	$\eta_{wh}$	162	%
Daily electricity consumption	Q <sub>elec</sub>	3.100	kW/h				
Annual electricity consumption	AEC	675	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUD-SHWM120VAA
	Indoor unit:	ERST20D-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters shall be declared for		medium-temperature application.
Parameters shall be declared for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.0	kW	Seasonal space heating energy efficiency	$\eta_s$	159	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	12	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	2.03	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	7.7	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	3.35	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	5.2	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.59	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	1.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	0.96	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	9.2	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.56	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	5.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	3901	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	120	%	
Daily electricity consumption	Q <sub>elec</sub>	4.100	kW/h				
Annual electricity consumption	AEC	900	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUD-SHWM120VAA
	Indoor unit:	ERST20D-****
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters shall be declared for		low-temperature application.
Parameters shall be declared for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.0	kW	Seasonal space heating energy efficiency	$\eta_s$	231	%
Declared capacity for heating for part load at indoor <input type="checkbox"/> temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	12	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.30	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	7.7	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.17	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.46	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	1.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.00	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	9.2	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.56	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	5.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	41/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	2688	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	$\eta_{wh}$	120	%
Daily electricity consumption	Q <sub>elec</sub>	4.100	kW/h				
Annual electricity consumption	AEC	900	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.