
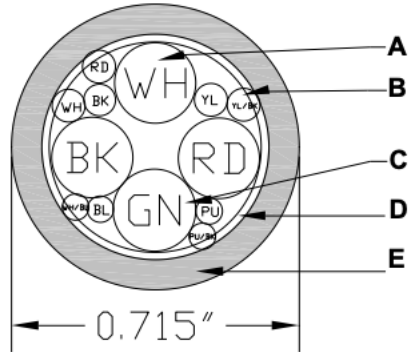


Home Standby Composite Cable

#8x3 Copper 9 Wire Control Wires

Rated 7-11kW Propane

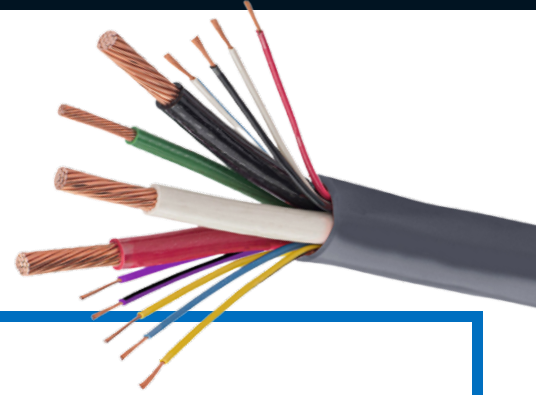

CONDUCTOR COLOR CODE

8 AWG

Black, White and Red

18 AWG

Black, Red, Yellow, Yellow/Black, Blue, White, Purple, Purple/Black and White/Blue

10 AWG

Green

COMPONENTS

- A** (3) - #8 AWG Class C stranded, soft drawn, bare copper circuit conductors w/30 mils (0.76 mm) heat and moisture resistant, polyvinyl chloride (PVC) insulation and jacketed w/ 5 mils (0.13 mm) nylon applied directly to the surface of the insulation.
- B** (9) - #18 AWG Class K stranded, soft drawn, bare copper conductors w/15 mils (0.38 mm) heat and moisture resistant, polyvinyl chloride (PVC) insulation and jacketed w/ 4 mils (0.10 mm) nylon applied directly to the surface of the insulation.
- C** (1) - #10 AWG Class C stranded, soft drawn, bare copper grounding conductor w/48 mils (1.22 mm) heat and moisture resistant, polyvinyl chloride (PVC) insulation and jacketed w/ 4 mils (0.10 mm) nylon applied directly to the surface of the insulation
- D** Mylar binder tape
- E** 60 mils (1.524 mm) of heat and moisture resistant, polyvinyl chloride (PVC) jacket. A ripcord shall be placed underneath the jacket.

SPECIFICATIONS

Conductors: ASTM B 3, ASTM B 8, ASTM B174

Insulation: ICEA S-95-658 (NEMA WC 70), ICEA S-73-532 (NEMA WC 57) CSA C22.2 No. 75 & UL 83 for Type THHN/THWN wires

Jacket: UL 1277

CSA C22.2 No. 239 for Type CIC/TC

PRINT LEGEND

(UL) E60544-PA POWER AND CONTROL TRAY CABLE TYPE TC-ER-JP 8 AWG (8,37 mm²) 3/C + 10 AWG (5,26 mm²) 1/C GROUND THHN/THWN CONDS 90C DRY/75C WET & 18 AWG (0,82 mm²) 9/C TFFN CONDS 600V OIL RES I SUN RES DIR BUR OR c(UL) CIC/TC TYPE PVC/N -25C 90C DRY/75C WET 600V FT4 JOIST PULL TCERDirect.com PN 2023TCERJP0711CU9 "sequential footage print"

RATINGS

UL THHN/THWN 600V
UL Type TC-ER-JP 600V
CSA CIC/TC

The insulation is acceptable for use in locations at 90 °C dry and 75 °C wet. The cable is suitable for use in cable trays, aerial or direct burial installations. The cable is JP rated for installation in accordance with Part II of Article 334.

ELECTRICAL

Voltage: 600V

All products are intended for use by a licensed electrician in compliance with all product information and applicable building codes, laws and regulations. Gen-Pro disclaims any liability for injuries to persons or damage to property arising from the improper installation of this product, installation by non-qualified persons or the use of this product for applications other than as specified. All dimensional data is nominal and subject to normal manufacturing tolerances. The information provided on this specification sheet is for guidance only. Purchasers of this product should consult with a licensed electrician regarding its applicability, use and proper installation.