



TROY

ALPHA BATTLE RAIL



WARNING! Observe safe firearm handling practices at all times. Make sure the firearm is unloaded and safety is engaged before starting installation. Installation should be performed by qualified gunsmith only!



1. Delta ring and front sight assembly have to be removed and a low profile gas block has to be installed.



2. Loosen the three screws by two full turns with 5/32 allen wrench.




3. Slide rail onto barrel nut while rotating rail 5 degrees "clockwise" until flush with receiver, then rotate back to align rail with upper receiver.



4. Holding rail into position, tighten the three retaining clamp screws evenly. (For best results use thread locking compound.)



5. (For rails with built-in sight) To raise sight, press button. To fold sight, press button and push sight down until it locks into position.

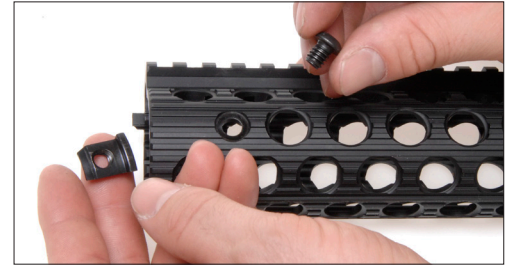

*If screw comes out of clamp, make sure tapered end is facing end of rail and nut lip is in groove of rail.

WWW.TROYIND.COM

Troy Industries, Inc. • West Springfield, Massachusetts 01089 U.S.A. • Tel: (866) 788-6412 • Fax: (413) 383-0339 • email: sales@troyind.com



TROY

ALPHA BATTLE RAIL



WARNING! Observe safe firearm handling practices at all times. Make sure the firearm is unloaded and safety is engaged before starting installation. Installation should be performed by qualified gunsmith only!



1. Delta ring and front sight assembly have to be removed and a low profile gas block has to be installed.



2. Loosen the three screws by two full turns with 5/32 allen wrench.




3. Slide rail onto barrel nut while rotating rail 5 degrees "clockwise" until flush with receiver, then rotate back to align rail with upper receiver.



4. Holding rail into position, tighten the three retaining clamp screws evenly. (For best results use thread locking compound.)



5. (For rails with built-in sight) To raise sight, press button. To fold sight, press button and push sight down until it locks into position.

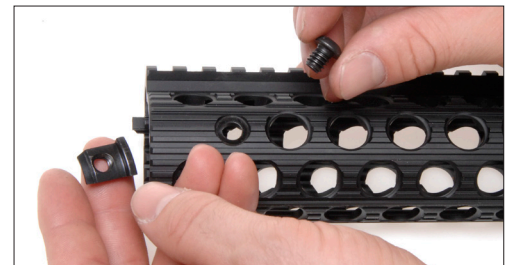

*If screw comes out of clamp, make sure tapered end is facing end of rail and nut lip is in groove of rail.

WWW.TROYIND.COM

Troy Industries, Inc. • West Springfield, Massachusetts 01089 U.S.A. • Tel: (866) 788-6412 • Fax: (413) 383-0339 • email: sales@troyind.com