

STEP 1

Lay out all 4 Joovv devices on a scratch-free surface. For the Joovv Max setup, the Mini devices will go on the bottom and be labeled #3 and #4.

STEP 2

Set the Quad bracket and connection bars on the Joovv Max or Quad system, making sure to line up all screw locations, as shown in **Figure A** for the Quad, and **Figure B** for the Max.



For the Joovv Max setup, the Mini devices will not use a connection bar.

STEP 3

Hand-tighten the screws with the included Allen wrench.

STEP 4

After setting up the mobile stand using separate instructions, hang your Max or Quad and proceed to the next step.

STEP 5

Connect the power and patch cords, as shown in **Figure A** and **B**.

STEP 6

Set the pairing switches to the appropriate lead and follow modes, as shown in **Figure A and B**.

STEP 7

Plug in the power cords to a wall outlet and you're ready to start Joovvin'!

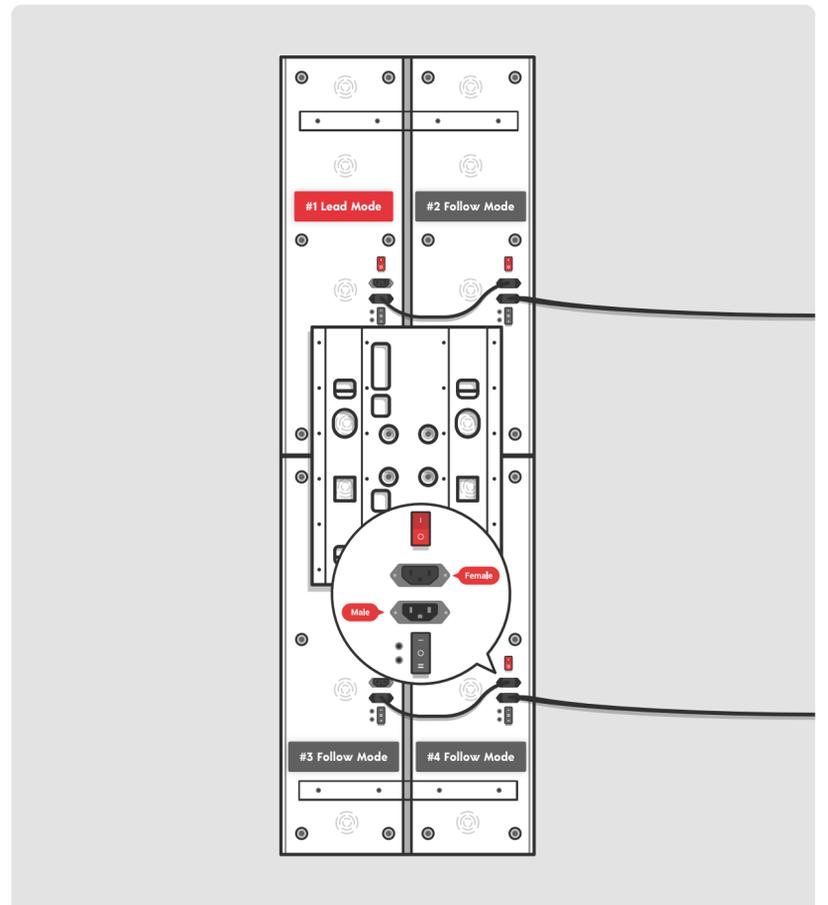


FIG. A

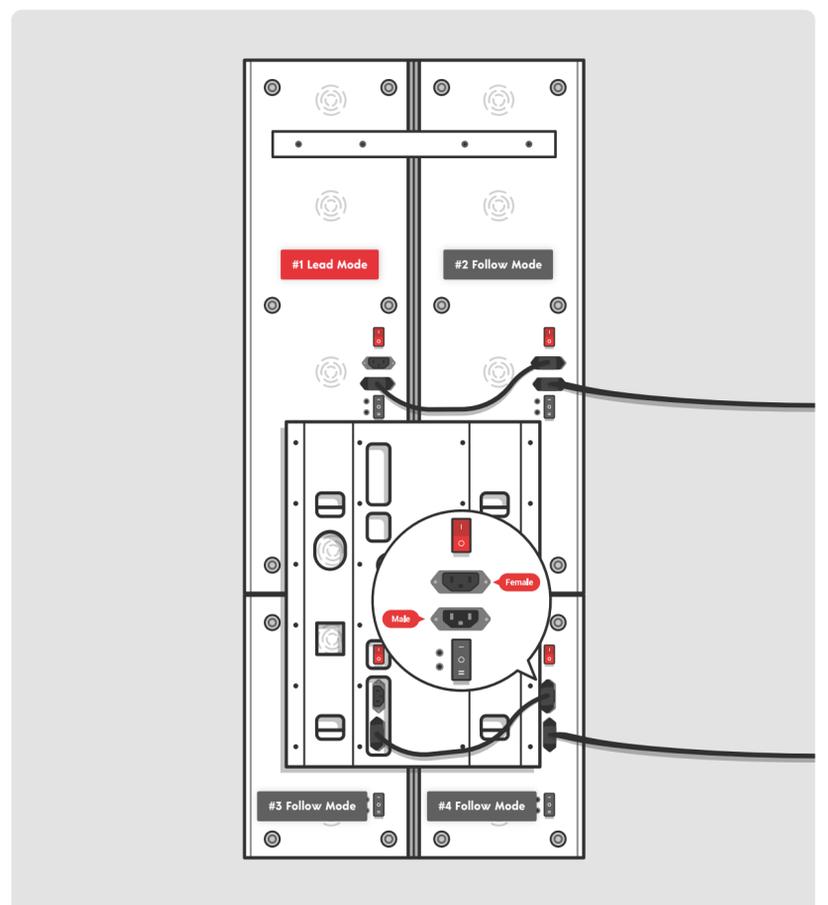


FIG. B



If you'd prefer instructional setup videos, please visit: www.joovv.com/setup



For comprehensive instructions, please review the product manual that was included with your Joovv devices.

STEP 1

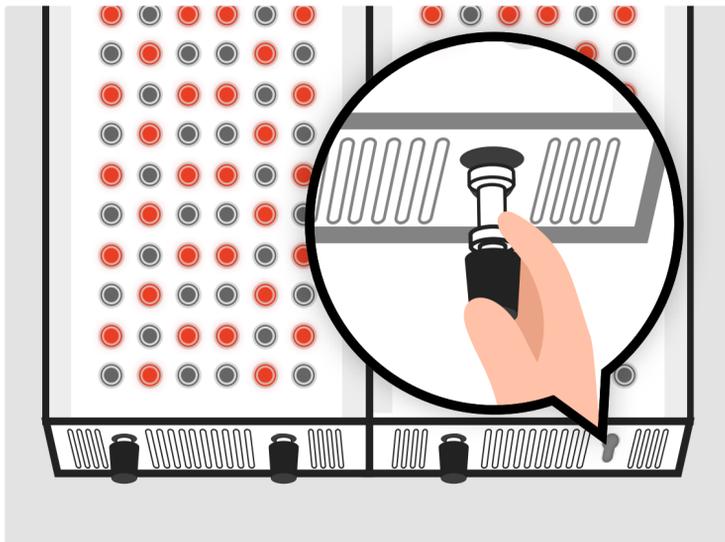


FIG. A

STEP 2

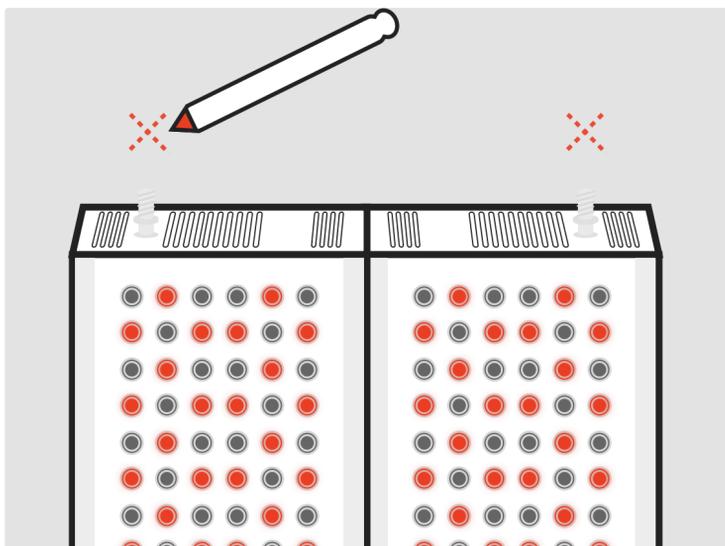


FIG. B

STEP 3

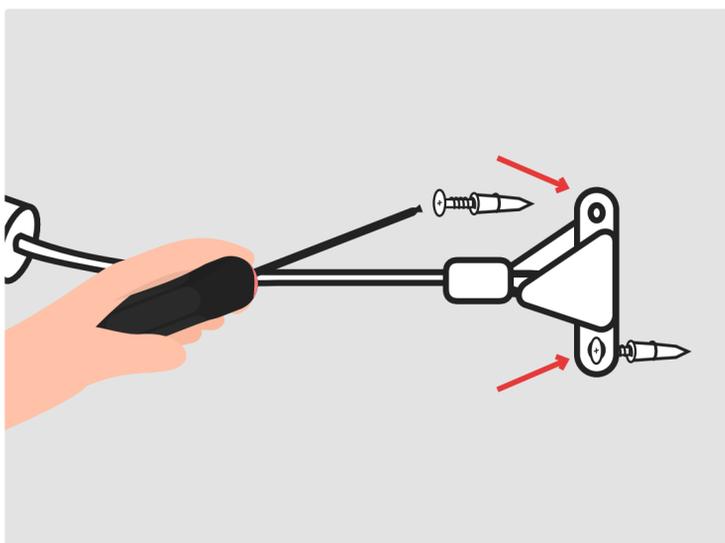


FIG. C

STEP 4

Place your Max or Quad back into position and plug back in the power cords and turn back on each device. Then, screw the braided cables to the threaded posts securing your Max or Quad and you're ready to start Joovvin'!

After assembling your Max or Quad following the step on the opposite side, attach the included floor bumpers on the bottom end caps. First adjust the nut to the end of the thread. Then insert the nut into the slotted hole and slide forward into position. While pulling down to hold the nut in position, twist the bumper clockwise to lock it in place, as shown in [Figure A](#).

Insert two threaded posts into the top end caps using the far left and far right holes. Then, attach one 90 mm braided cable to each threaded post. Next connect the anti-tip bracket to each braided cable, and with a pencil, mark the spot directly behind the threaded posts, as shown in [Figure B](#).

Next, remove the braided cables from the threaded post and reposition your Max or Quad to the side. Place the anti-tip bracket on the wall with the center aligned with the pencil marked location. Then mark each hole location with a pencil. Drill a 7/32" hole for each marked hole and insert the included wall anchors. Use a hammer to tap the anchors into position, then attach the brackets to the wall using the included screws, as shown in [Figure C](#).



If you'd prefer instructional setup videos, please visit:
www.joovv.com/setup



Failure to securely install the anti-tip kit could result in serious injury. For comprehensive instructions, please review the product manual that was included with your Joovv devices.