



NFW

OWNER'S MANUAL

Uncompromising
watches where
design, engineering
and style collide.

Congratulations on the purchase of your NFW timepiece!

We take great pride in what we design and produce. We hope you'll take great pride in wearing it.

NFW is a small company, driven by unwavering dedication and entrepreneurial spirit, fueled by the inspiration to create exquisite timepieces. We cut no corners for the sake of the bottom line and we use the finest materials. Every detail of every watch design is attended to with great skill, care, knowledge and a passion for excellence. So, please take a moment to marvel at your bad-ass new watch!

Thank you for your support of NFW.
We're glad to have you on board!

CARE AND FEEDING OF YOUR WATCH

NFW watches are pretty tough, as far as precision instruments go. Here's a few tips to help keep your watch running strong and lookin' good for many years.

WATER RESISTANCE

For depth ratings of 50 meters we don't recommend wearing while swimming. Most NFW watches have screw-down crowns. Always be sure the crown is pushed in and screwed down securely before getting wet. Never push buttons or pull out the crown while underwater. It will cause leakage. After salt water or sand exposure, rinse watch with fresh water.

SCRATCHES

CASE: Even though NFW watch cases are forged from solid stainless steel, they can still scratch. Some people feel that scratches actually add character. If you're into a more pristine appearance, take care not to bang the watch or place it in

④ scratch-prone situations.

CARE AND FEEDING OF YOUR WATCH continued

SCRATCHES


CRYSTAL: NFW crystals are made from hardened mineral glass. It's pretty tough stuff but it can be scratched. Best to be careful. Also, we coat the crystals with a special anti-reflective coating, just because we thought you'd appreciate it.

SCREWS: Screws are a common design element on NFW watches. Some are functional, some are decorative. Do not attempt to remove any screws. They're extremely difficult to put back. Trust us on this one!

BATTERY REPLACEMENT: Every couple years have your battery replaced by a professional jeweler. Remember, the guts of this precision instrument are very delicate, as are the gaskets and seals.

METAL BAND: NFW metal bands have removable links, for a custom fit. Take the watch to a jeweler for adjustment of the links. These guys have special tools for this type of adjustment.

BASIC 3-HAND WATCH

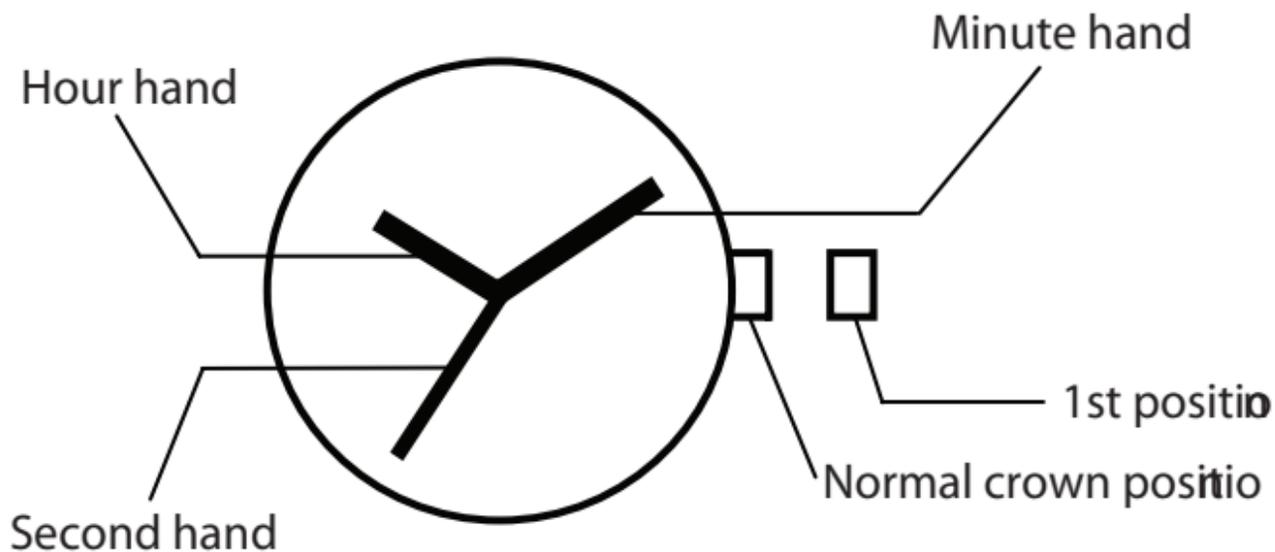


SETTING THE TIME

1. Pull out the crown to the 1st position.
2. Turn the crown to set hour and minute hands.
3. When the crown is pushed back in to the normal position, the watch begins to run.

NOTE: For screw-down crowns, you must unscrew the crown first, then pull it out to the 1st position. After adjusting the time, carefully screw the crown back down securely.

Never get your watch wet while the crown is pulled out, or not tightly screwed down. This will cause leakage and will damage the watch. (remember: tough, but still a precision instrument).

WATCH WITH DATE FEATURE

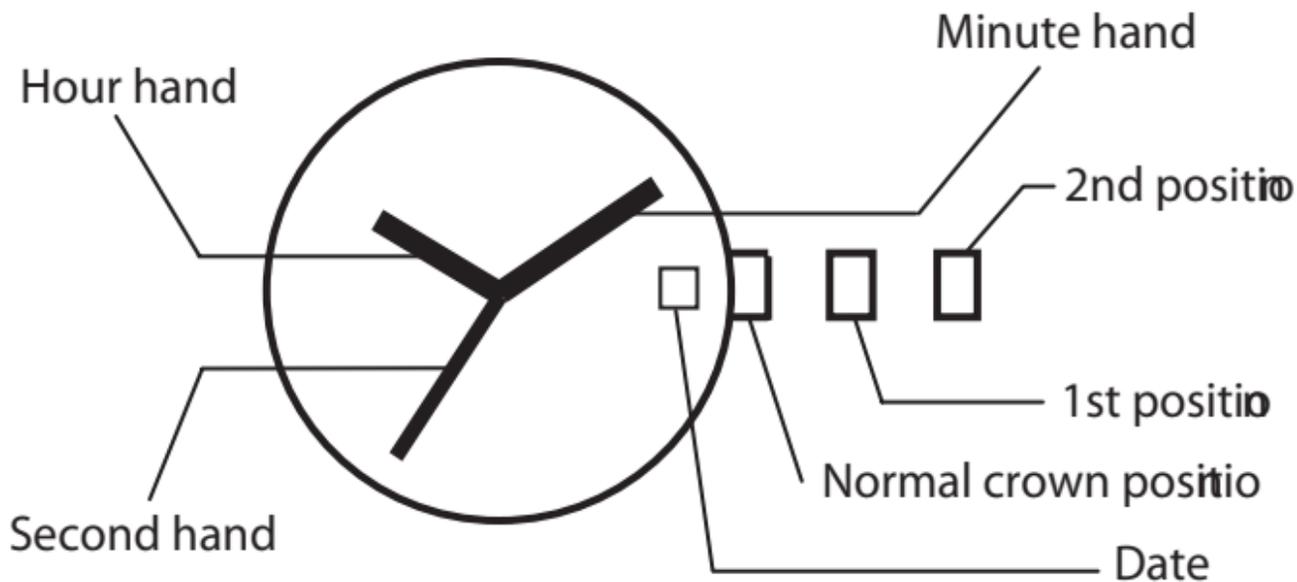

SETTING THE TIME:

1. Pull out the crown to the 2nd position.
2. Turn the crown to set hour and minute hands.
3. When the crown is pushed back in to the normal position, the watch begins to run.


SETTING THE DATE:

1. Pull the crown out to the 1st position.
2. Turn the crown counter-clockwise to set the date. If the date is set between the hours of 9:00 PM and 1:00 AM, the date may not change on following day. So, set the date after 1:00 AM or before 9:00 PM.
3. After the date's been set, push the crown back to the normal position.

NOTE: For screw-down crowns, you must unscrew the crown first, then pull it out to the 2nd position. After adjusting the time, carefully screw the crown back down securely.

Never get your watch wet while the crown is pulled out, or not tightly screwed down. This will cause leakage and will damage the watch. (Remember: tough, but still a precision instrument).

WATCH WITH DAY AND DATE FEATURES

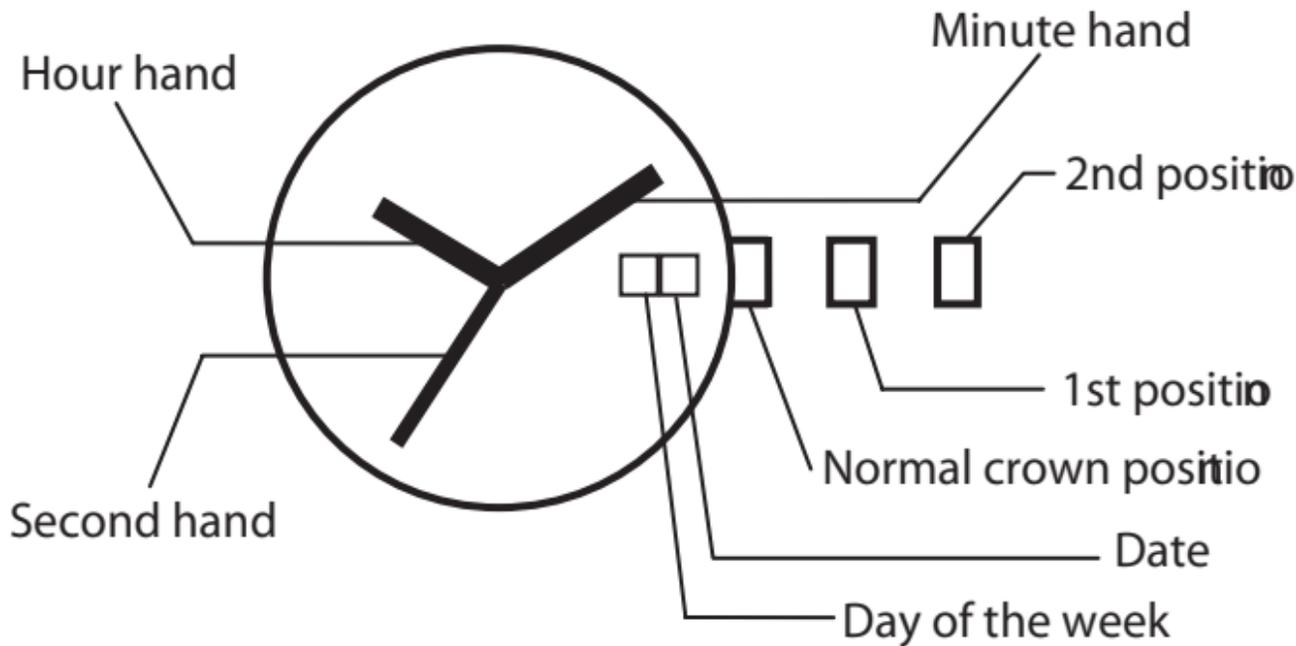

NOTE: For screw-down crowns, you must unscrew the crown first, then pull it out to the 1st or 2nd position. After adjusting time or date, carefully screw the crown

⑩ back down securely.

SETTING THE TIME:

1. Pull out the crown to the 2nd position
2. Turn the crown to set hour and minute hands.
3. When the crown is pushed back in to the normal position, the watch begins to run.


SETTING THE DATE:

1. Pull the crown out to the 1st position.
2. Turn the crown counter-clockwise to set the date. If the date is set between the hours of 9:00 PM and 1:00 AM, the date may not change on following day. So, set the date after 1:00 AM or before 9:00 PM.
3. After the date's been set, push the crown back to the normal position.

SETTING THE DAY OF THE WEEK:

1. Pull the crown out to the 1st position.
2. Turn the crown clockwise to set the weekday. If the date is set between the hours of 9:00 PM and 1:00 AM, the weekday may not change on following day. So, set the weekday after 1:00 AM or before 9:00 PM.
3. After the day has been set, push the crown back to the normal position.

CHRONOGRAPH

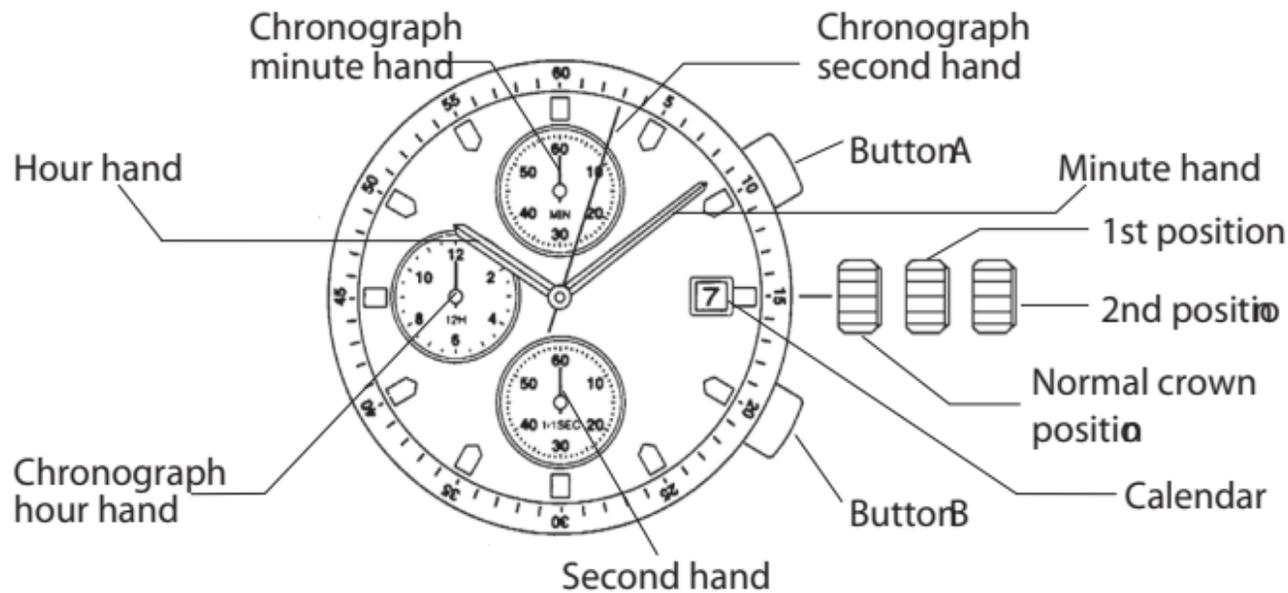

SETTING THE TIME:

1. Pull out the crown to the 2nd position
2. Turn the crown to set hour and minute hands.
3. When the crown is pushed back in to the normal position, the watch begins to run.

SETTING THE DATE:

1. Pull the crown out to the 1st position.
2. Turn the crown counter-clockwise to set the date. If the date is set between the hours of 9:00 PM and 1:00 AM, the date may not change on following day. So, set the date after 1:00 AM or before 9:00 PM.
3. After the date's been set, push the crown back to the normal position.

USING THE CHRONOGRAPH:

The chronograph will measure time for up to 12 hours.

1. The chronograph can be started and stopped each time button "A" is pressed.
2. Pressing button "B" resets the chronograph, returning the chronograph second hand, minute hand, and hour hand to their zero positions.

CHRONOGRAPH SETTING INSTRUCTIONS continued

RESETTING THE CHRONOGRAPH: This procedure should be performed if the chronograph second hand does not return to the zero position after pressing button “B,” or after the battery has been replaced.

1. Pull the crown out to the 2nd position.
2. Press button “A” repeatedly to set the chronograph second hand to the zero position. The second hand can be advanced quickly by pressing and holding button “A.”
3. Once the hand has been zeroed, press the crown back in to its normal position. Just be sure to wait until the second hand is set at zero before pushing in the crown (this will make the second hand stop before reaching zero).

NOTE: For screw-down crowns, you must unscrew crown first, then pull it out to the 2nd position. After adjusting the time, carefully screw the crown back down securely. Never get your watch wet while the crown is pulled out, or not tightly screwed down. This will cause leakage and will damage the watch. (remember: tough, but still a precision instrument).

NFW WATCH WARRANTY

We'll keep this short and sweet. If something goes wrong with your NFW watch, due to a manufacturing defect, during the first three years that you own it, we'll take care of you, either repairing or replacing the watch, at our discretion. We make good products and we stand behind them.

Here's what's not covered, since these are not considered manufacturing defects: Scratched or broken crystals, scratched cases, batteries, abuse, normal wear and tear (including leather straps), water leakage that occurred while the crown was pulled out or because of buttons being pushed while in the water.

WATCH SERVICE

If your watch needs service, return it to:

NFW
10 Dwight Street
Fairfield, CT 06824

Enclose with the watch to be returned:

1. A copy of your sales receipt
2. A brief letter containing:
 - a. An explanation of the problem
 - b. Your email address and phone number
 - c. Your return mailing address



NFW

www.NFWonline.com

©2005 NFW, LLC