


## NOTES:

- If installing Alfred in wet location please refer to page 2 for additional instructions. Please review both pages prior to installation.
- Alfred can be installed on a ceiling or wall junction box.

## REQUIRED TOOLS:

- Phillips Head Screwdriver
- Flathead Screwdriver

## INCLUDED HARDWARE:




Installation Kit (x1)



8-32 x .4" Screws (x2)




Gasket Washers (x2)



Circle Bracket (x1)

## INSTALLATION INSTRUCTIONS

1. Detach Circle Bracket from Fixture Body by removing 8-32 x 0.4" Screws. Reserve Screws and Gasket Washers for step 4.
2. Attach Circle Bracket to junction box.
3. Wire Fixture Body to junction box. Consult electrician if necessary.
4. Attach Fixture Body to Circle Bracket using 8-32 x 0.4" Screws. Gasket Washers required for wet locations.
5. Install Bulb.
6. Attach Glass Shade.
7. Attach Metal Shade.

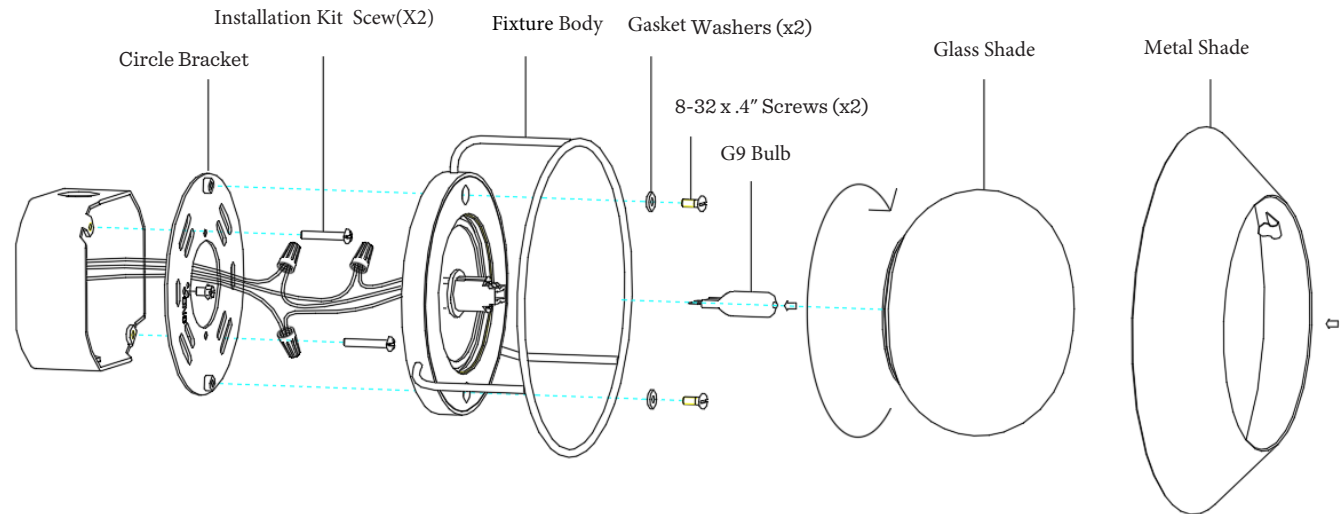

**NOTES:**

- Follow these instructions for wet location installation
- Please ensure mounting surface is flat.

**REQUIRED TOOLS:**

- Outdoor Silicone Caulking

## INSTALLATION INSTRUCTIONS

1. Clean area around Junction Box where fixture is to be installed. Ensure clean area is slightly larger than fixture Canopy and is dry before proceeding.
2. Follow installation instructions from page 1.
3. Apply Outdoor Silicone Caulking to the entire Canopy Rim where it will meet the mounting surface. For wall installation leave a small section at the bottom center of the Canopy free of Silicone Caulking. This open section will allow any water to leave the Canopy if any has entered the Canopy.

