


REPLACEMENT RUBBER CONE FOR BATTING TEE




Please call us if you have any questions or concerns at **1-855-4RUKKET**


Please read our product safety warnings before setup

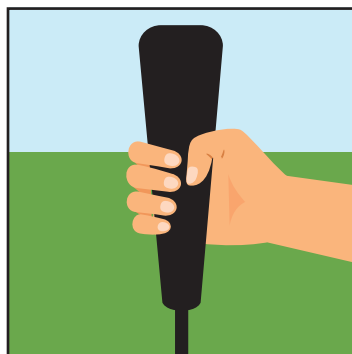

1. Firmly grasp the rubber tee component with one hand

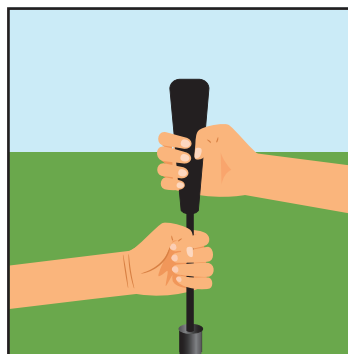


2. Grab the rod that the rubber tee component is attached to with your other hand

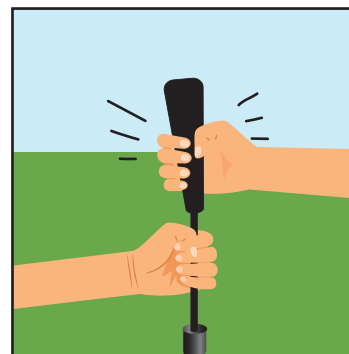

3: Slowly wiggle, twist, and pull on the rubber tee component. The rubber tee head should slowly come off the rod. NOTE: Be careful to pull gently and away from your body to avoid the rubber tee flying off and hitting your body.



4. Place the new rubber tee head onto the rod, with the hole centered over the rod. Slowly push the rubber tee component onto the rod, twisting and wiggling slightly as you assemble it.

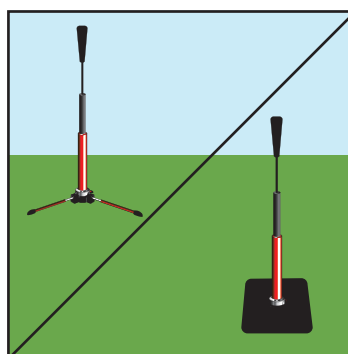

5. Once the component no longer moves down the shaft, the product has been correctly assembled. Replacement part can be used on ARMD Pro Batting Tee and Heavy Duty Batting Tee Play Ball!



WARNING

Change of Rubber Tee Head should be performed by adult.