

RUKKET ARMD BATTING TEE

ASSEMBLY INSTRUCTIONS



Our video instructions provide the best guidance for setting up your ARMD Batting Tee. They can be viewed online at

RUKKET.COM

[/RukketSports](https://www.youtube.com/channel/UCRukketSports)


Please call us if you have any questions or concerns at 1-855-4RUKKET

1 To deploy your ARMD Batting Tee, stand it upright on the silver metal attaching collar and splay out the three legs until they lock into place. To unfold the legs, hold onto the red aluminum pipe with one hand while pushing a leg down. Be careful to keep your fingers away from the pinch-points on the base when folding the legs.

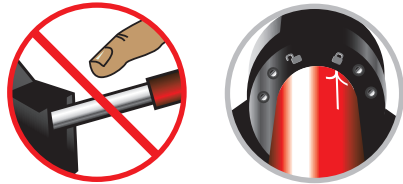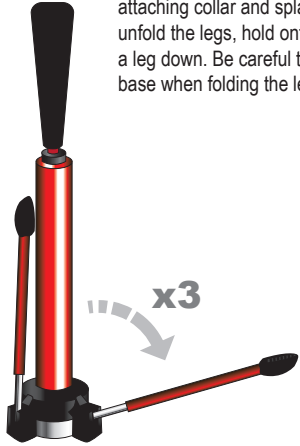


NOTE: Notice the lock and unlock icons molded into the black polycarbonate base and the arrows painted onto the red aluminum lower pipe. The arrow should be pointing to the "locked" icon.


2 While gripping the black polycarbonate base in one hand and the red aluminum pipe in the other, twist the pipe counter-clockwise to release the pipe from the base and pull it free of the base..

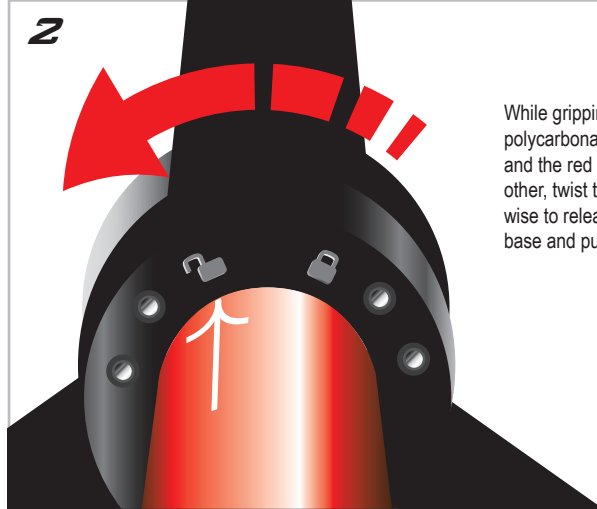


3 Turn the base of your tee over onto its feet so that the silver metal collar is now on top.

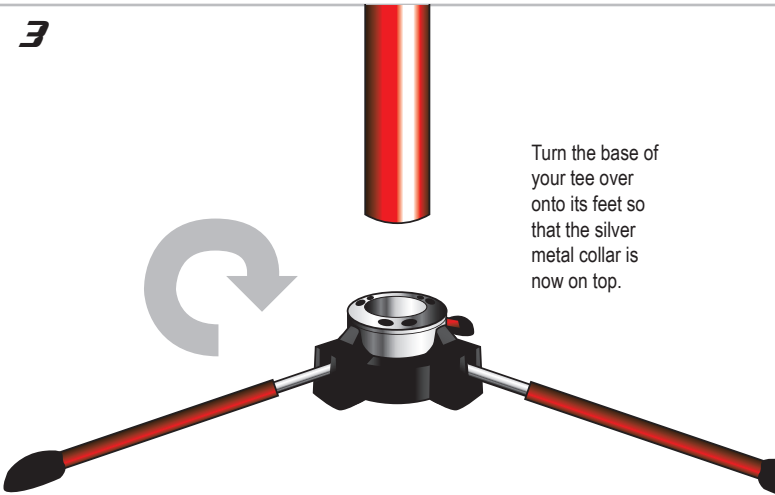


4 Align the lower arrow with the 'unlock' icon engraved into the silver metal collar and insert it until it is completely seated, and the arrow is pointing at the 'unlock' icon.

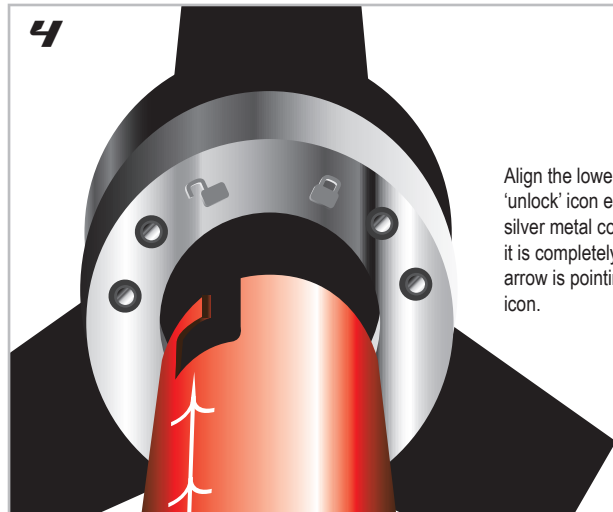

5 While gripping the batting tee's base in one hand and the red aluminum pipe in the other, push down and twist the pipe clockwise until you feel the pipe lock tight into the base and the arrow is pointing at the 'lock' icon.

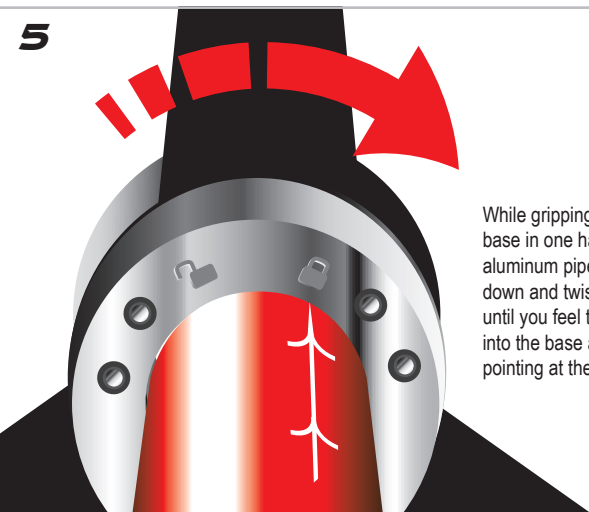

6 Adjust the batting tee to the desired height by first extending the black fiberglass portion before extending the tinted aluminum inner pipe. This will keep the tee's center of gravity lower and create more stability.

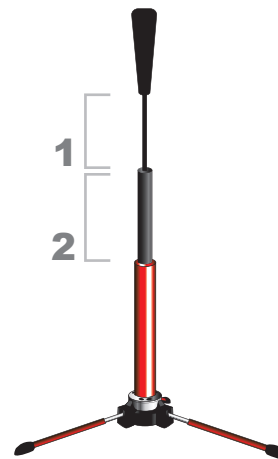

Questions? Give us a call! (1-855)-478-5538

RUKKET SPORTS