

WiFi switch instruction

The default is self-locking. If you need touching mode, please enter the setting (three points on the top right corner of APP) after the code is set to turn on "touching switch time"

1. First download the app "ewelink" from the mobile phone. Android searches in the application market. Apple searches in the Appstore, registers an account and logs in.
2. Near the wi-fi signal source, the module power, the signal indicator lamp has the frequency of flashing three stop to enter the status of the code. If you do not flash three, stop one, press and hold the key for 6 seconds
3. Open your phone APP and Click "+" to add your device. Click "quick add" to fill in your wi-fi name and password, search for your device, and then click "finish adding". You can also try to add compatibility mode (AP) by selecting.


Note: 1. When pairing, the mobile phone needs to be connected to the same WiFi used by the module
2. Chinese and symbol are not recommended for WiFi name and password
3. The module does not support 5G network temporarily.
4. If it is displayed offline after pairing, please wait for 1 minute. If it is also displayed offline, please disconnect the power supply of the module and restart.



Android Code Video



Iphone Code Video

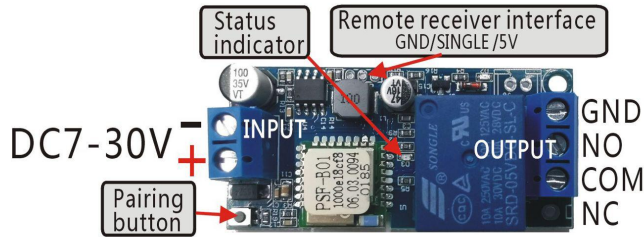


Common modification connection diagram

Small home appliance connection



Access control power connection



Card swiping integrated lock connection

