

Technical Support and E-Warranty Certificate www.vevor.com/support

FUEL CADDY USER MANUAL

Model: JGC16PH, JGC16PH2


We continue to be committed to provide you tools with competitive price.

"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and doses not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.



FUEL CADDY

MODEL: JGC16PH, JGC16PH2

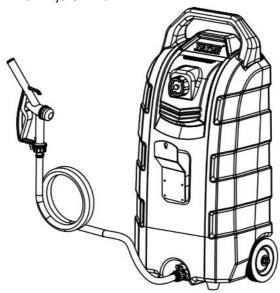

NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

CustomerService@vevor.com

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

AWARNING

- 1. Read carefully and understand all **ASSEMBLY AND OPERATION INSTRUCTIONS** before operating.
- 2. Failure to follow the safety rules and other basic safety precautions may result in serious personal injury.

GENERAL SAFETY RULES

When using this product, basic precautions should always be followed, including the following;

- This product is not intended for use by persons (including children)
 with reduced physical, sensory, or mental capabilities or lack of
 experience and knowledge unless they have been given supervision
 or instruction concerning the use of the product by a person
 responsible for their safety.
- Wear proper protective equipment when installing or using this product.
- Ensure all fittings and threaded connections are tightened and leak-free before operating.

A DANGER!

Fuels are extremely flammable. Keep away from heat sparks and open flames.

- Do not use electronics or mobile communications devices such as mobile phones when pumping flammable liquids.
- Attach ground wire and bond containers that are being pump from and into. Ground all containers to a known ground source to dissipate static electricity before pumping liquids.
- Fuel vapors can explode. Harmful or fatal if swallowed. Avoid breathing in fuel vapors.
- Do not smoke near or while using the fuel caddy.
- This product is intended for fuel transfer only and is not intended to transport fuel in any vehicle or trailer.

Do not modify this product.

A WARNING! CAUTION! ATTENTION!

- Do not use this product for prop-longed fuel storage.
- Use the caddy for one fuel type only to avoid possible damage.
- Monitor flow rate and fill level to prevent overflows and spills.
- Always empty the pump and hose after using the caddy. Lift the hose and turn the handle in the opposite direction to empty all remaining liquid back into the caddy.
- Caution when filling the caddy through the fill tube, Monitor closely to prevent overflows or spills.
- This product is unsuitable for placing in a yacht, off-road vehicle, and another violent vibration place.




Never use the fuel caddy near open flames or heal sources.

SAVE THESE INSTRUCTIONS

MODEL AND PARAMETERS

Model	JGC16PH	JGC16PH2			
Capacity	16 Gal	16 Gal(single)			
Fuel Type	Diesel,Lubricating Oil,Gasoline				
Oil Discharge	Hand oil gun	Hand oil gun			
Max. Flow	7.8 L/min(Oil gun is 0.5m below the tank outlet)				
Hose	Ф19(Inside	Ф19(Inside			
	Diameter)x250cm	Diameter)x250cm			
Wheel	6"	6"			
Package	1	2			
Material	PE	PE			
Color	Red	Red			

STRUCTURE DIAGRAM

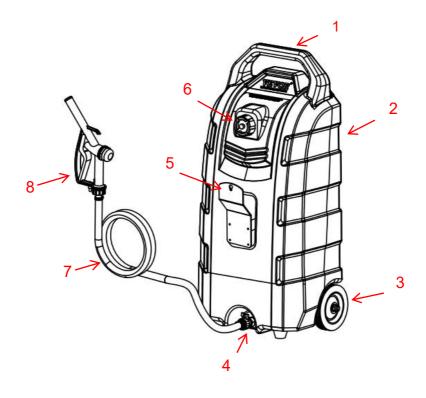

Handle 2. Fuel Tank 3. Fixed Wheel 4.Outlet
 Fixed Mount 6. Fuel Tank Cap 7. Hose 8. Hand Fuel Gun


COMPONENTS (SINGLE)

No.	Picture	Name and Qty	No.	Picture	Name and Qty
1		Fuel Tank(x1)	6		Direct Ball Valve Joint(x1)
2		Fixed Mount(x1)	7		Hose Clamp(x2)
3		Fuel Tank Cap (x1)	8		Bolt(x3)
4		Fuel Gun (x1)	9		Fixing Plate (x1)
5		Long Hose (x1)	10	1	User Manual(x1)


ASSEMBLY

Step1: Install fixed mount(2) and fixing plate(9), lock with bolt (8), as shown below.


Put on the fuel tank cap(3).

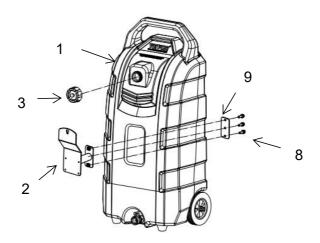

Step2: Install the direct ball valve joint(6) at the bottom outlet of the tank. Connect the inlet fuel gun and the outlet of the fuel tank with the long hose(5), and lock them with the hose clamps(7).

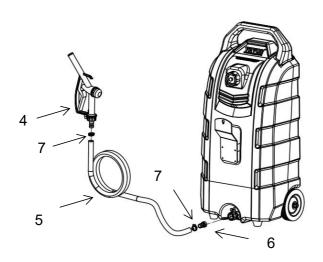

Step3: Make sure that the components are tightened; The product is assembled and ready for use.

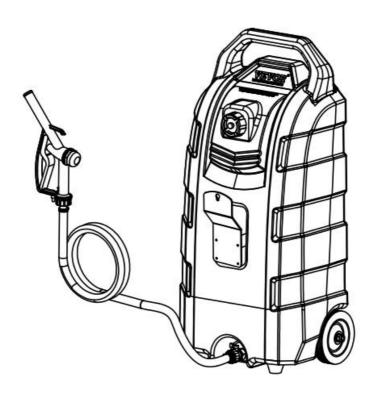

OPERATION

Refueling operation:

- -Please choose the appropriate oil filling, do not fill with chemicals or another corrosive solvent.
- -Lay the tank flat and make sure the direct ball valve joint is closed.
- -Open the tank cap and fill the oil.
- -During oil filling, pay attention to the filling of the tank to avoid overflow.
- -After filling the tank, tighten the cap and place the tank in a safe place.

Pumping operation:

- -Place the tank vertically and turn the air valve of the fuel tank cap counterclockwise.
- -Ensure that the oil level in the tank is at least 0.5 m higher than the fuel gun; Press the fuel gun to refuel. After the oil is discharged, the switch at the handle of the oil gun can be locked, and the oil will continue to flow out.
- -As the oil level in the tank decreases, the oil flow from the oil gun decreases; Please raise the tank so that the oil level is higher than the oil gun.
- -When refueling, please raise the gun above the tank to recover the remaining oil in the long hose and return to the tank.
- -Close the direct ball valve joint and the air valve of the fuel tank cap.

MAINTENANCE

- 1. Please clean the measure and filter regularly.
- 2.Keep away from fire.
- 3. For different types of oil, cleaning the tank before storing another type of oil is recommended.
- 4.If this product is not used for a long time, it is recommended to clean and store it in a cool and dry environment.

Sanven Technology Ltd.

Address: Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

Made in China



TechnicalSupport and E-Warranty Certificate www.vevor.com/support