Model:A-3032

Max. lift height	Load Capacity
177 "	**3300lbs**
Working time	Charging time
8h	**8h**

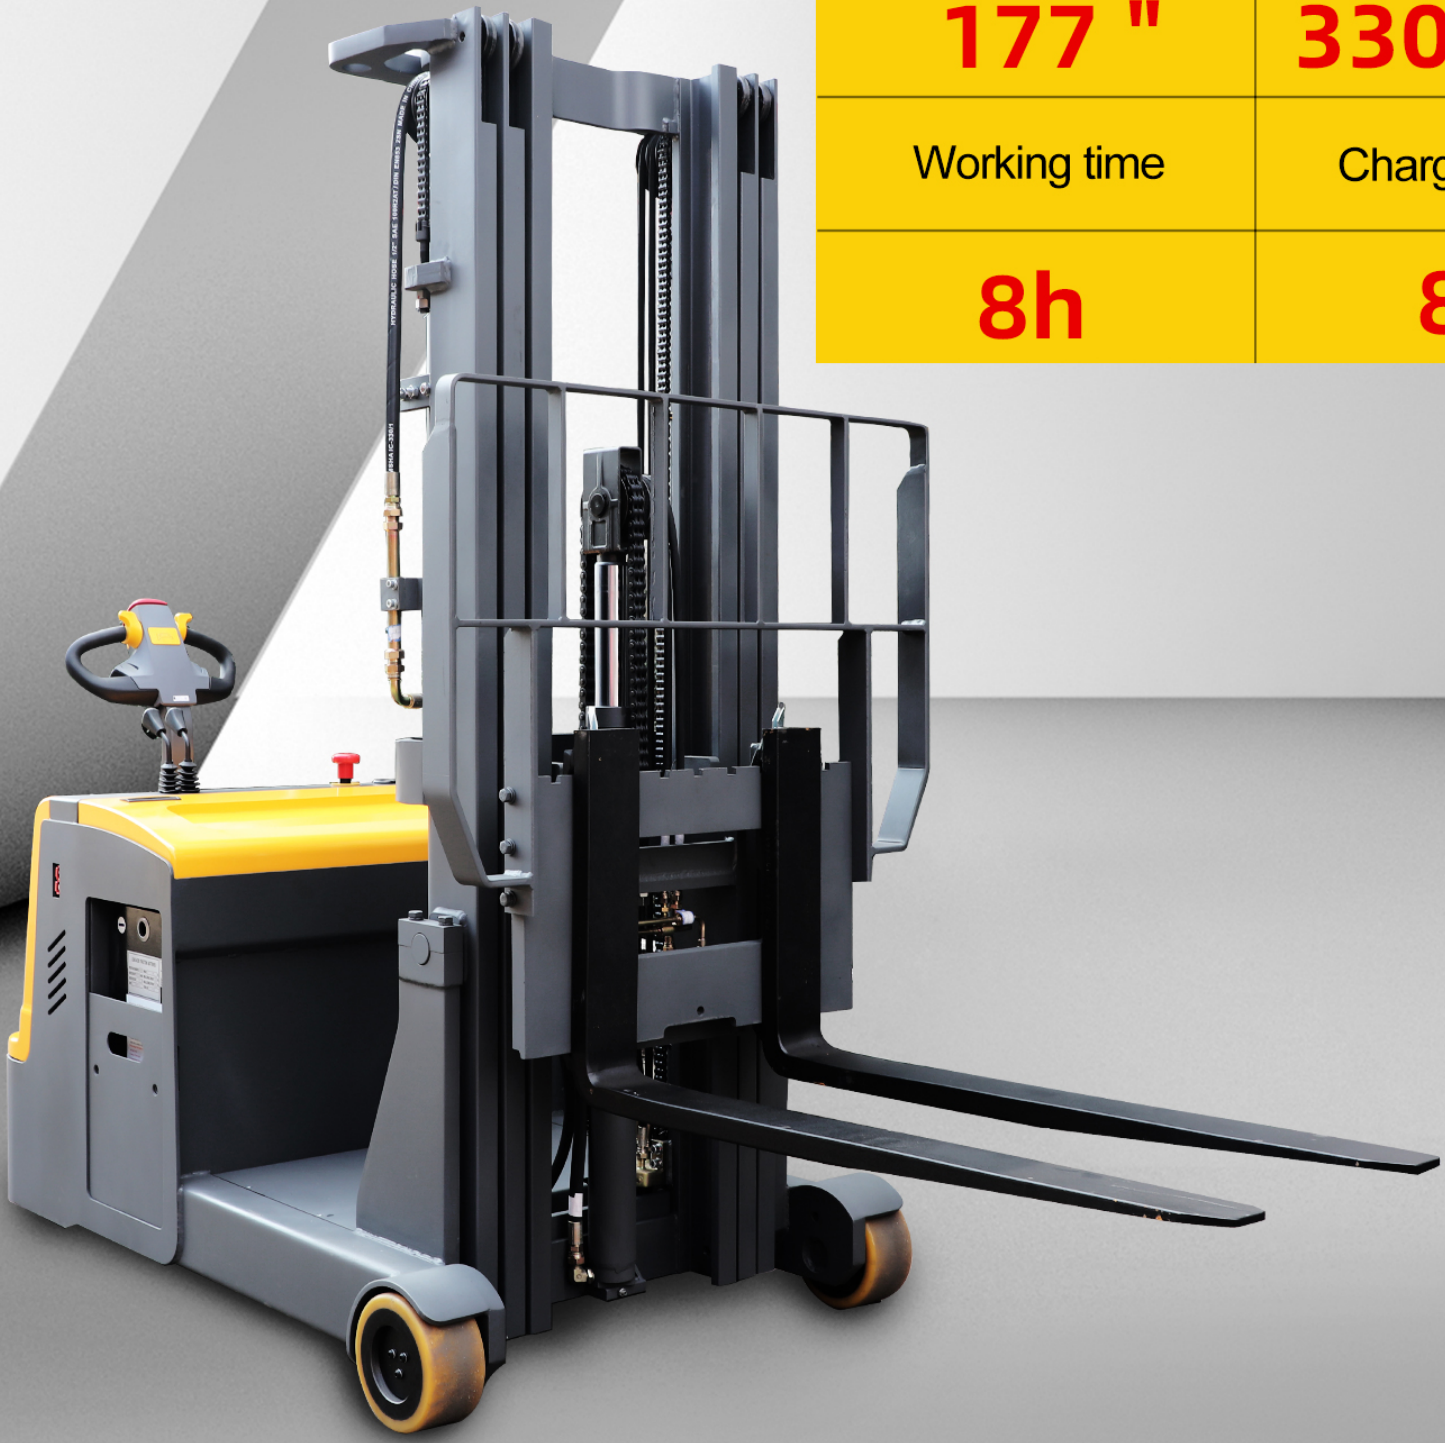

BASIC PARAMETERS

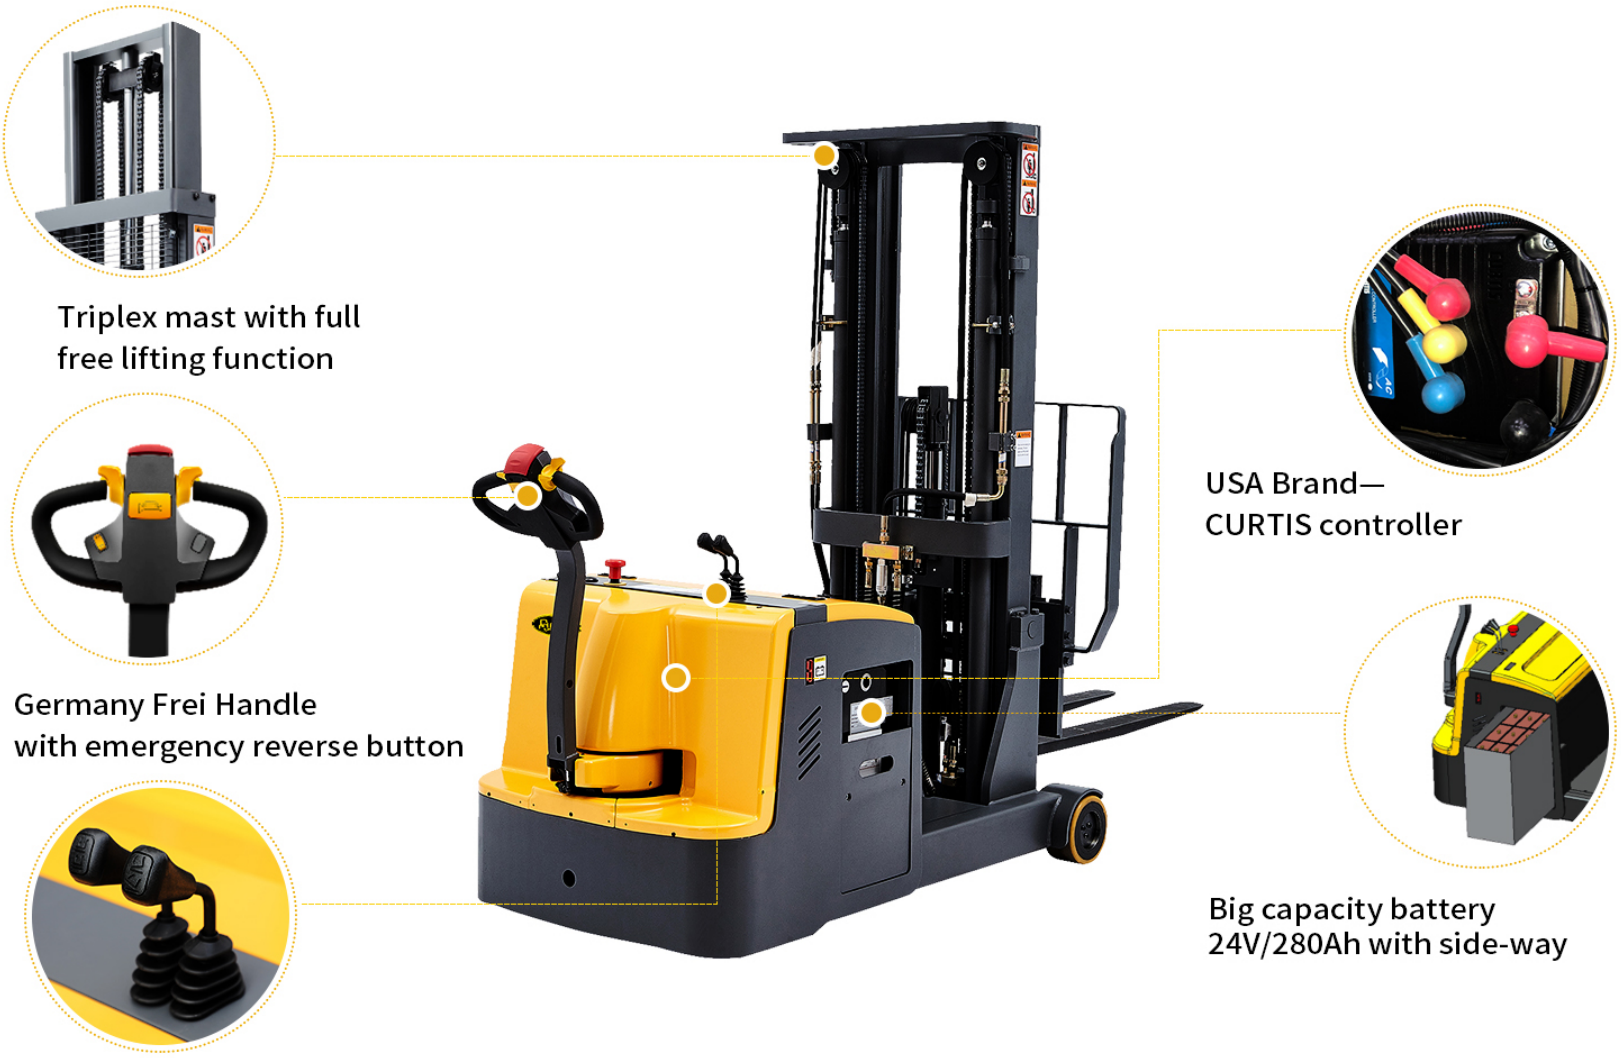

Triplex mast with full
free lifting function

Germany Frei Handle
with emergency reverse button

Hydraulic operation
handle，Lifting & Lowering
Fork Tilting(forward & backward)

USA Brand—
CURTIS controller

Big capacity battery
24V/280Ah with side-way

GERMANY FREI HANDLE OPERATION CHART

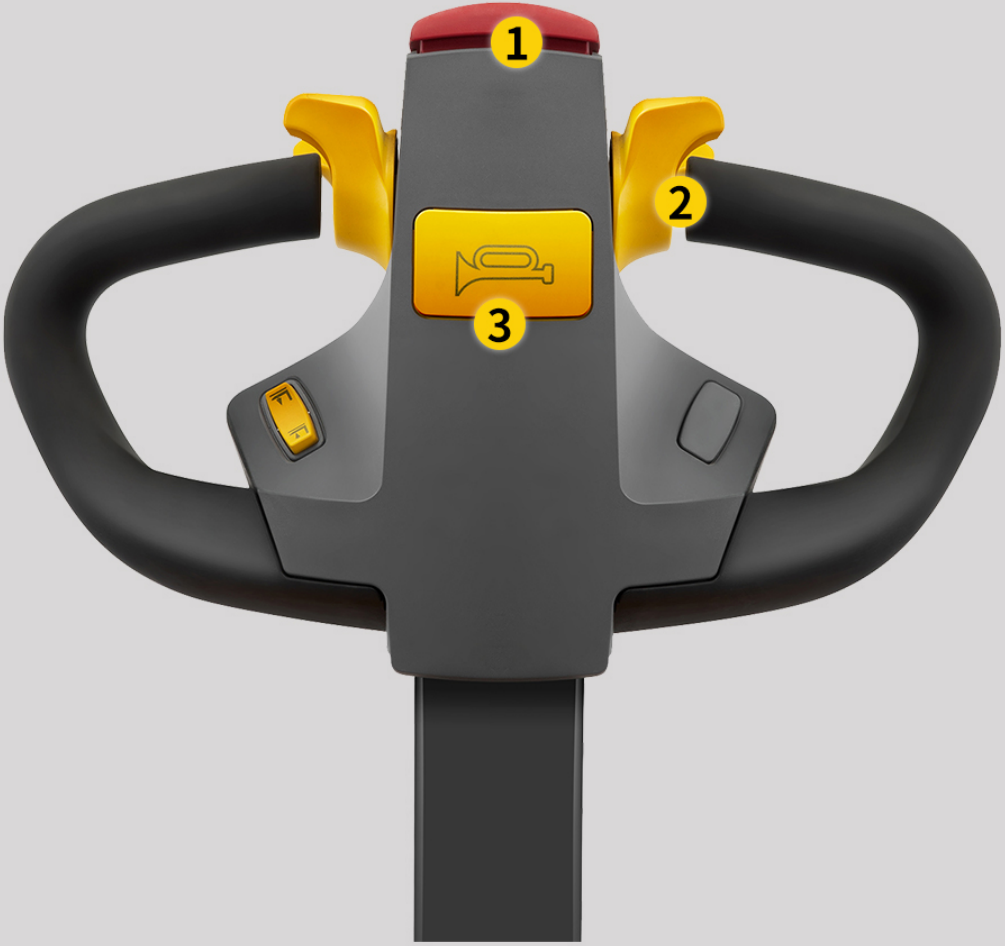

① Emergency Reverse Button

② Accelerator button

③ Horn button

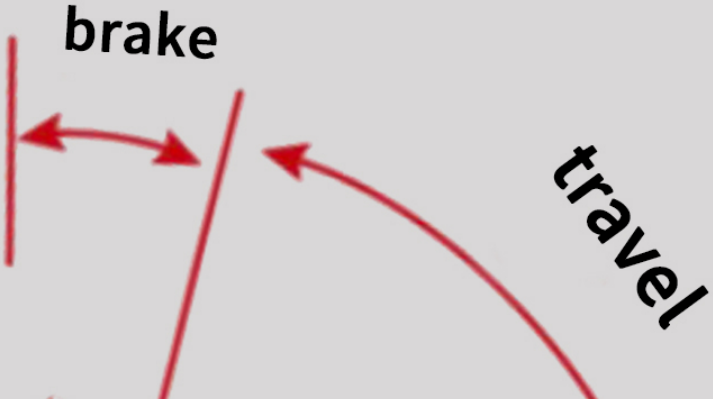

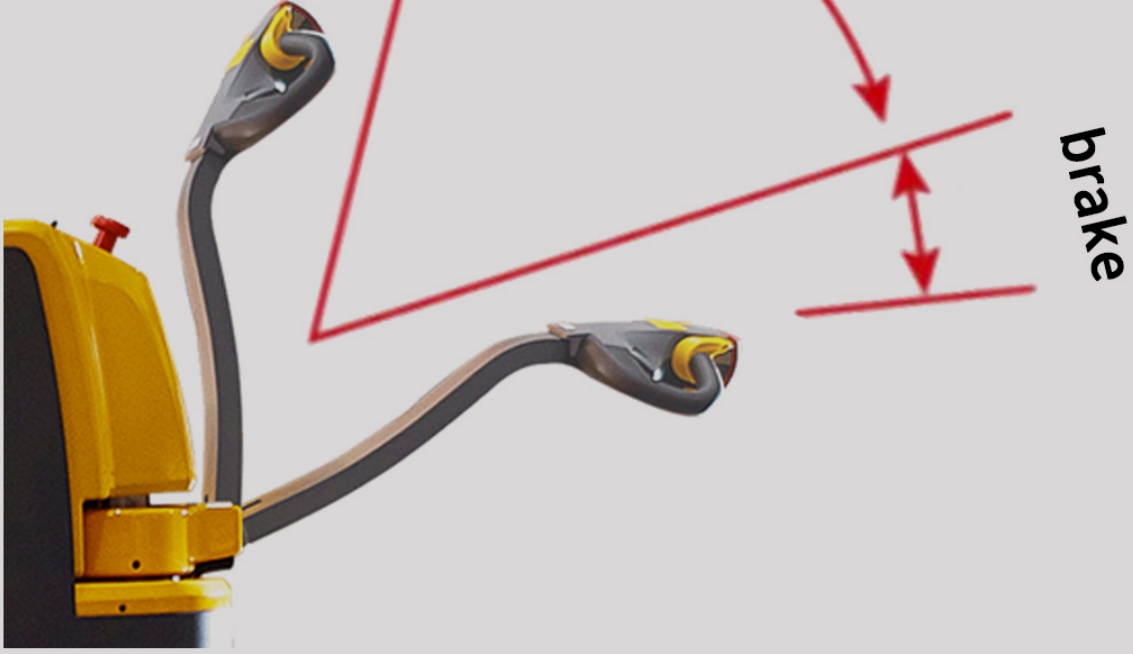



LOAD CAPACITY CHART

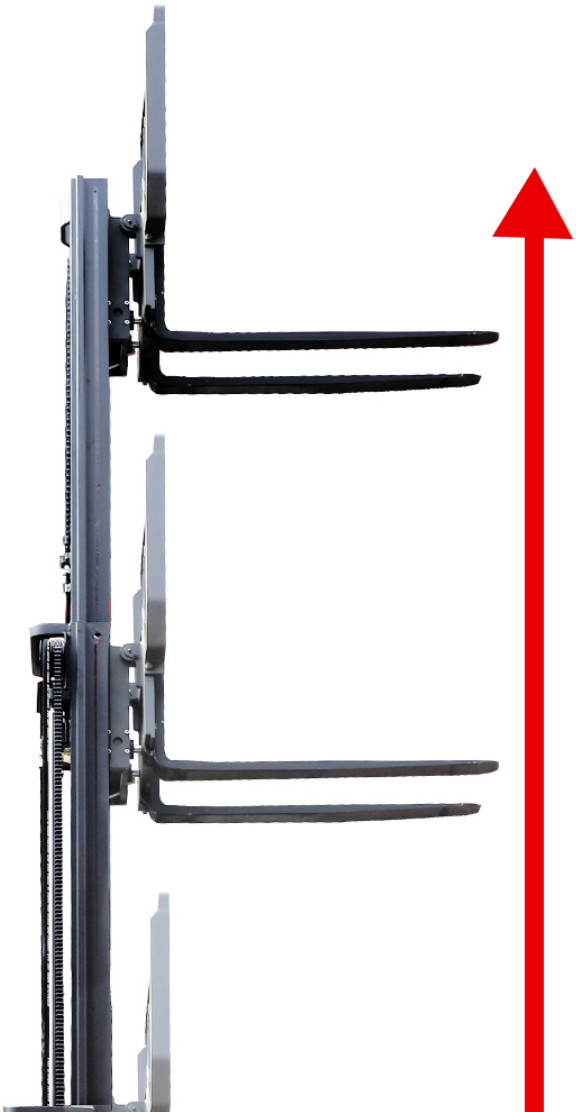

Load capacity is 1980LBS
when the lifting height
is between 157-177 inch

Load capacity is 2310LBS
when the lifting height
is between 137-157 inch

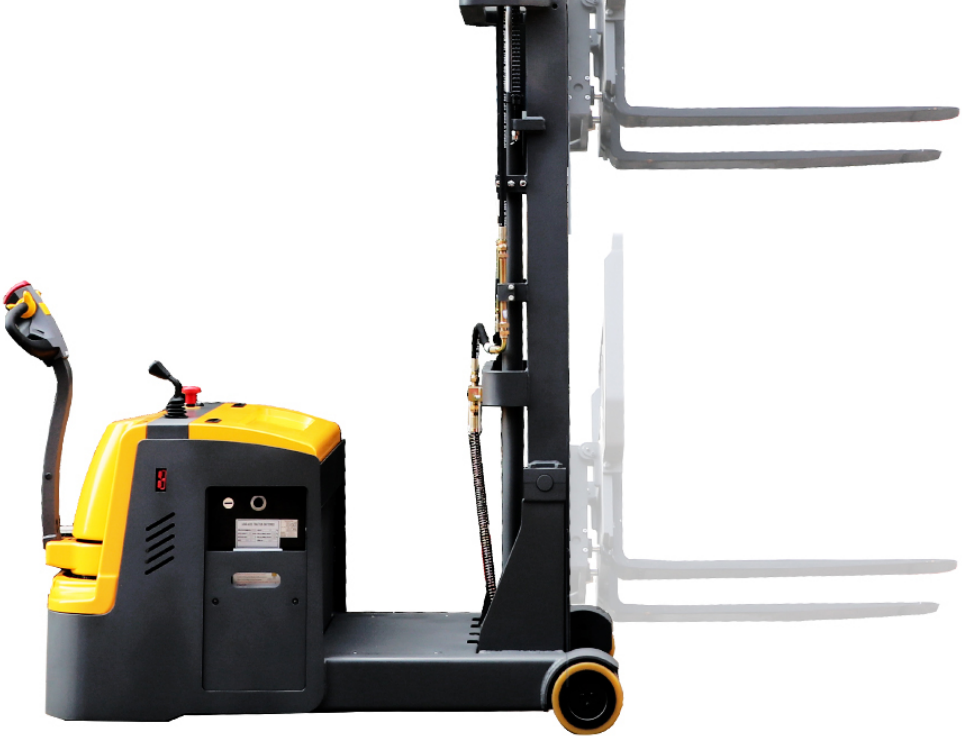

Load capacity is 2640LBS when the lifting height is between 118-137inch

Load capacity is 3300LBS when the lifting height is within 118 inch

Specially used in higher rack with heavy products

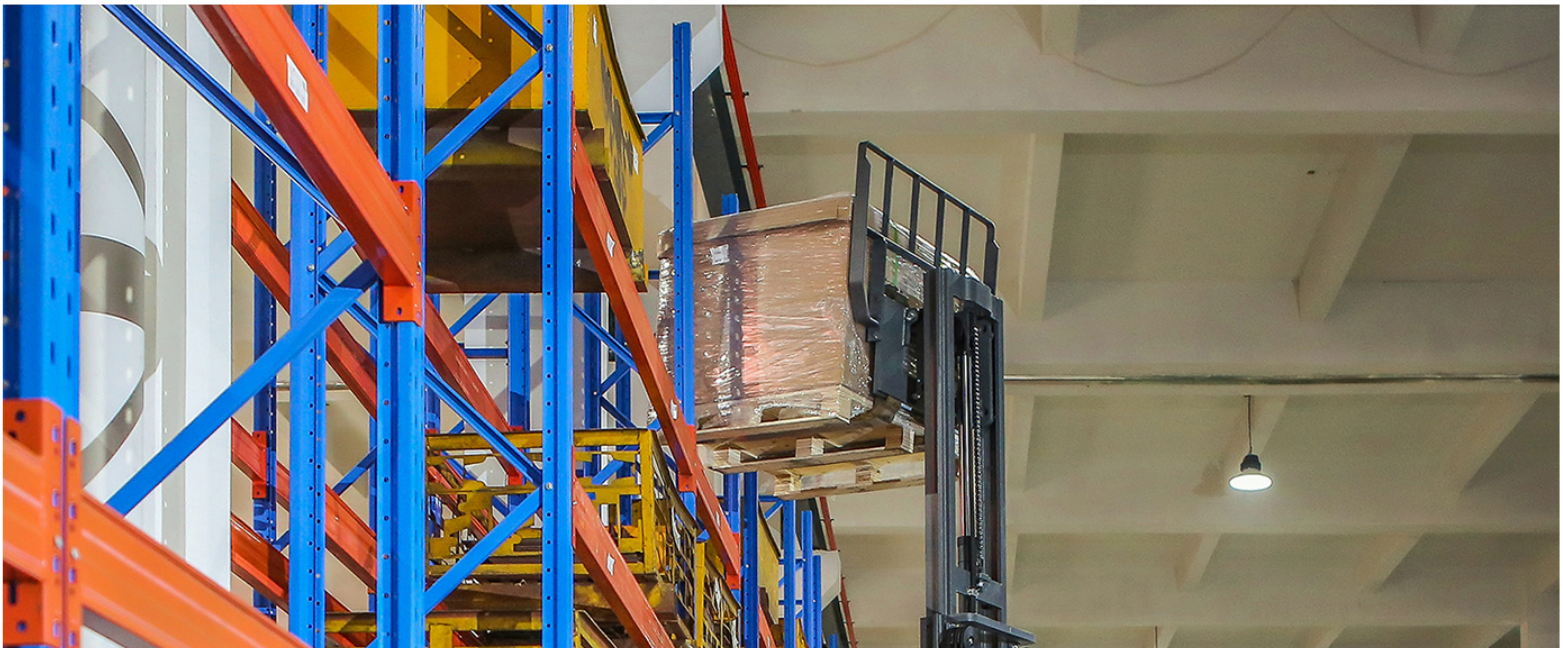

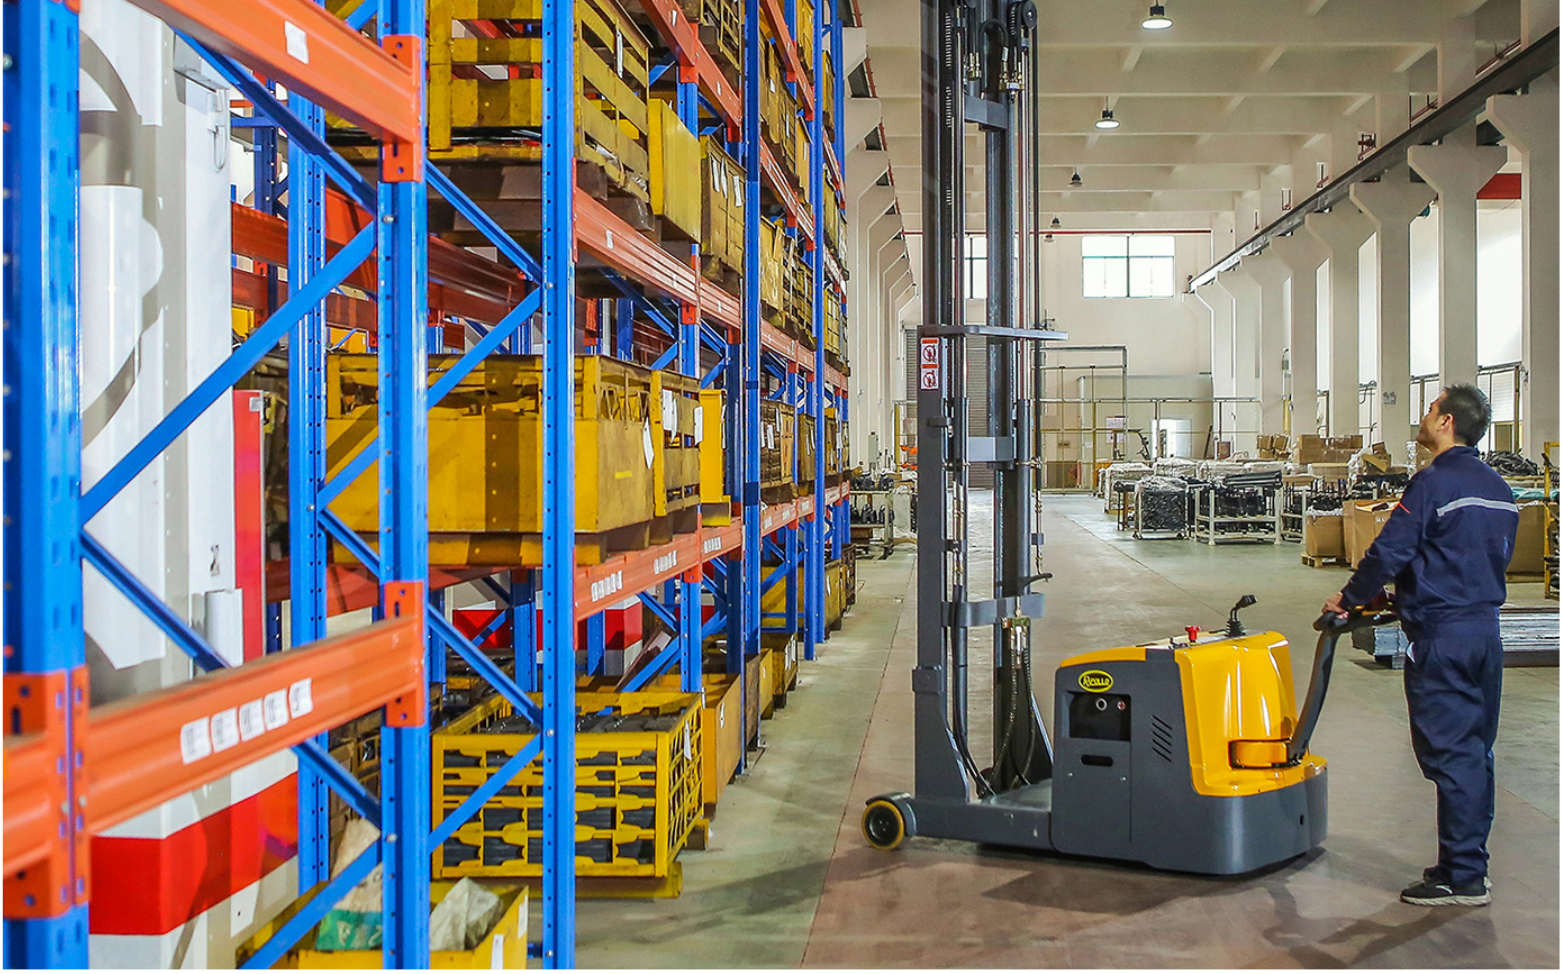





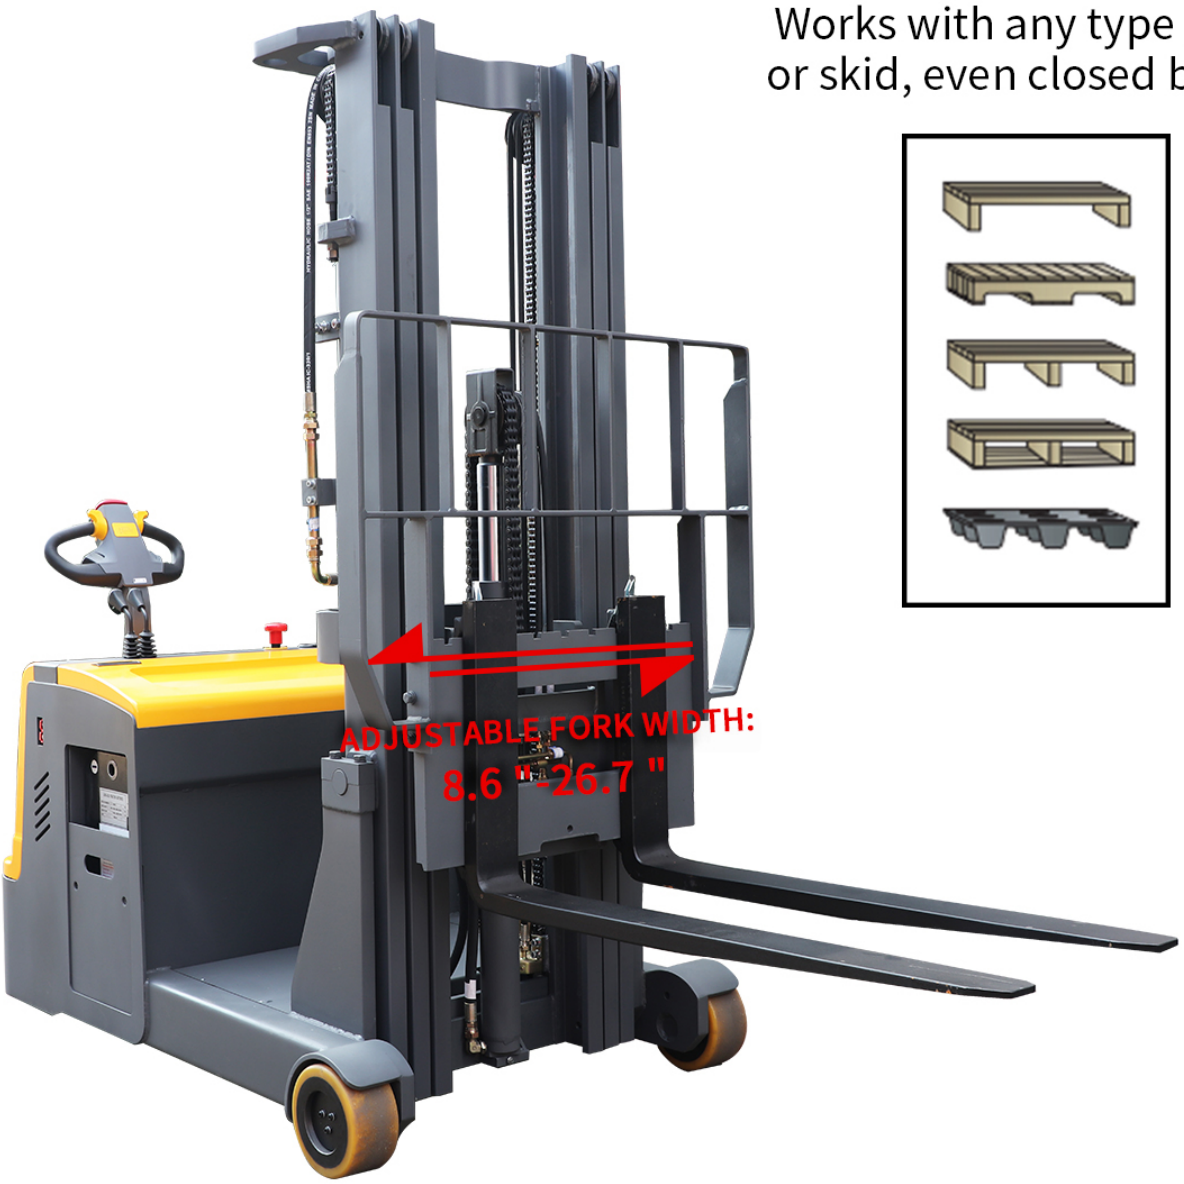

Works with any type pallet
or skid, even closed bottom

PERFORMANCE ADVANTAGES

AC Driving System

Whether smooth or fast acceleration is applied, the AC Drive gives always the right and direct response.

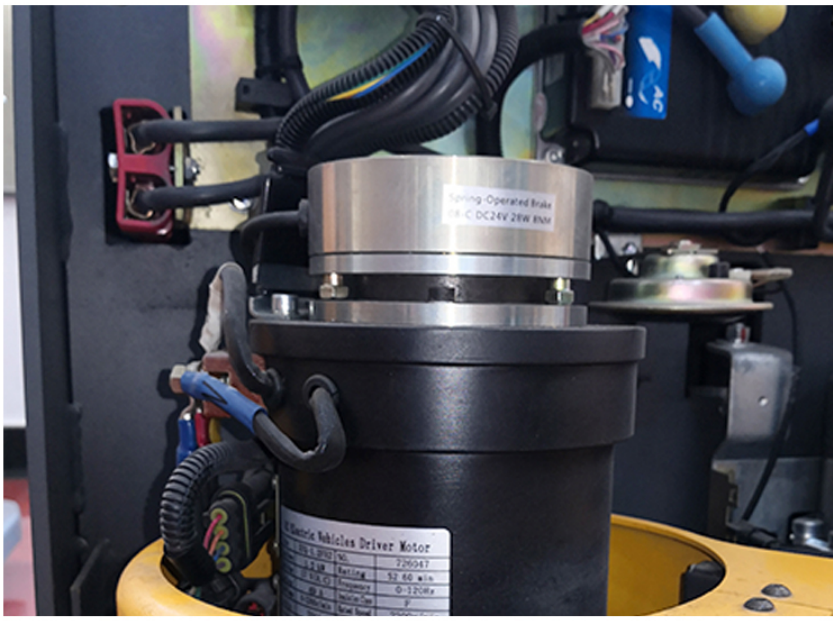

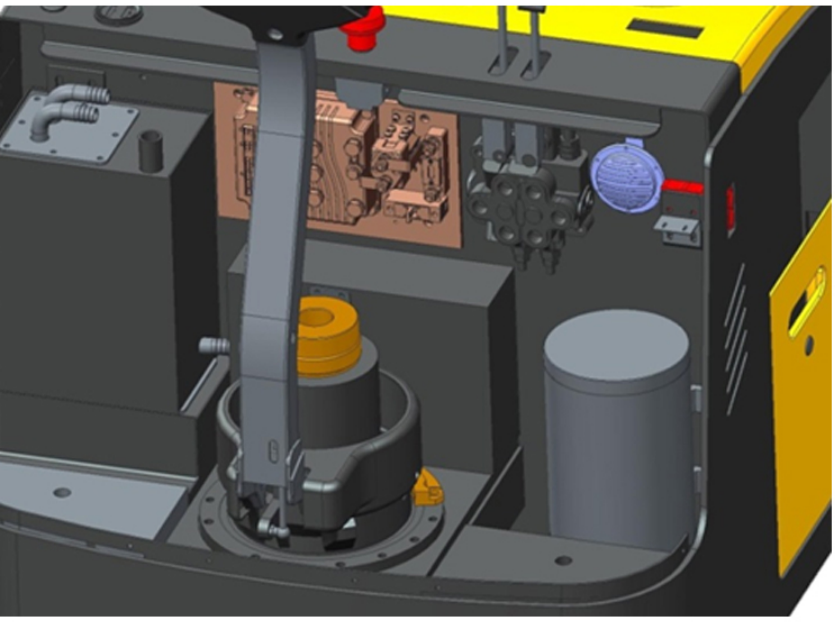

Maintenance Friendly

The truck design and the used components are tailored to make service and maintenance easy. All components are easy to reach when removing the main cover only with screws.

Vertical Driving wheel

1) Easy for replacing the wheel
2) Small turning radius, only 61.8 "
3) Low noise, only 55db
4) Dust-proof and water-proof motor

Model Name	A-3032
Load Capacity	3300lbs

Height, Mast Lowered	177inch
Height, Mast Extended	216.5 inch
Fork Dimensions	1.3*3.9*42 inch
Lifting Speed (Laden/Unladen)	0-4.7/0-6.3 inch/s
Travel Speed (Laden/Unladen)	3.6/3.7 mile/h
Gradeability (Laden/Unladen)	6%/10%
Turning Radius	61.8 inch
Battery type	Lead Acid
Rated Voltage	24V/280Ah
Service Weight	4576 lbs