



Ductwrap

Glasswool: A thermal insulation blanket with reinforced foil

DESCRIPTION

Ductwrap is a thermal insulation blanket specifically designed to wrap around air conditioning ducts. Manufactured from high quality, non-combustible Glasswool, bonded with an inert thermosetting resin binder and faced with a reinforced foil. A 100 mm overlapping flange is provided on one side for a neater appearance and adequate seal.

QUALITY MANAGEMENT SYSTEM

Isover products are manufactured according to ISO 9001:2008.

ENVIRONMENTAL SUSTAINABILITY

Isover products are manufactured according to ISO 14001:2004.

Less material, less energy and less emissions

- Zero ozone depleting potential (ODP)
- Zero global warming potential (GWP)

FEATURES & BENEFITS

- Lifelong energy savings
- Non-combustible
- Lightweight - facilitates fast and easy installation
- Safe application and use
- Can be used in a high humidity environment
- Long product life
- Ensures lower operating costs
- Noise reduction
- Condensation control

FIRE PROPERTIES

- Non-combustible - tested to SANS 10177 Part 5

THERMAL PROPERTIES

Significantly reduces heat gain and loss.

ACOUSTIC PROPERTIES

Offers exceptional acoustic properties and enhances indoor environmental quality by absorption of mechanical noise generated by air conditioning equipment.

APPLICATIONS

External wrap around metal airconditioning ducts:

- Rectangular and round heating, ventilation and airconditioning systems

DURABILITY

- Odourless, inert and fully compatible with all standard building materials and components
- Will not promote corrosion of steel, copper or aluminium
- Will not sustain vermin
- Will not breed or promote fungi, mould or bacteria
- Non-hygroscopic
- Prevents condensation on cold metal duct surfaces, extending the life of the system



Ductwrap

PHYSICAL PROPERTIES

Rval (m ² .K/W)	Thickness (mm)	Length (mm)	Width (mm)	Density (kg/m ³)	k-value (W/m.K)	NRC Value
0.66	25	10 000	1200	18	0.038	0.75
1.05	40	10 000	1200	18	0.038	0.85
1.32	50	10 000	1200	18	0.038	0.90


Typical values

TOOLS NEEDED FOR INSTALLATION

Tape measure, sharp knife/blade, straight edge and strapping equipment.

INSTALLATION INSTRUCTIONS

1. Before applying Ductwrap, air ducts should be clean, dry and tightly sealed at all joints and seams.
2. All portions of duct designated to receive Ductwrap should be completely covered with Ductwrap.
3. Install Ductwrap with the facing showing, butting the adjacent rolls tightly together, utilising the 100 mm facing overlap to ensure an adequate seal.
4. Seams and joints should be sealed with pressure-sensitive tape matching the insulation facing.
5. Where rectangular ducts are 600 mm in width or greater, Ductwrap insulation should be additionally secured with strapping at 300 mm centres.
6. Where a vapour barrier is required, seal all tears, punctures and other penetrations of the Ductwrap facing.

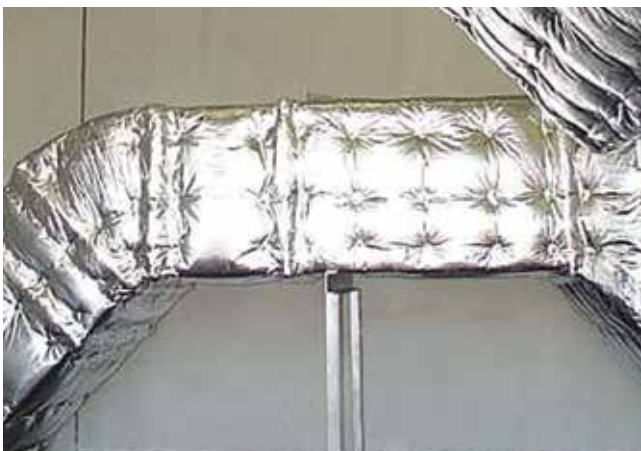

HANDLING & STORAGE

Store product under cover and in dry conditions. Store flat. Handle with care, especially on the edges and corners, which can be damaged if subject to sharp or heavy impact. Do not apply excessive pressure, for example by standing or sitting on the product, as permanent damage may be caused.

ARCHITECTURAL SPECIFICATION

Install (25/40/50) mm thick flexible non-combustible lightweight "Ductwrap" with reinforced foil facing over rectangular and round (heating/ventilation/air conditioning) duct system.

Isover reserves the right to alter or amend product specification without notice. The information given in this publication is correct to the best of our knowledge at the time of publication. Whilst Isover will endeavour to ensure publications are up to date, it is the users' responsibility to check with us that it is correct prior to use.

ISOVER
SAINT-GOBAIN

Tel: 0860 ISOVER (476837) Fax: 086 673 1088
www.isover.co.za