


Technical Data Sheet

Tornado Direct

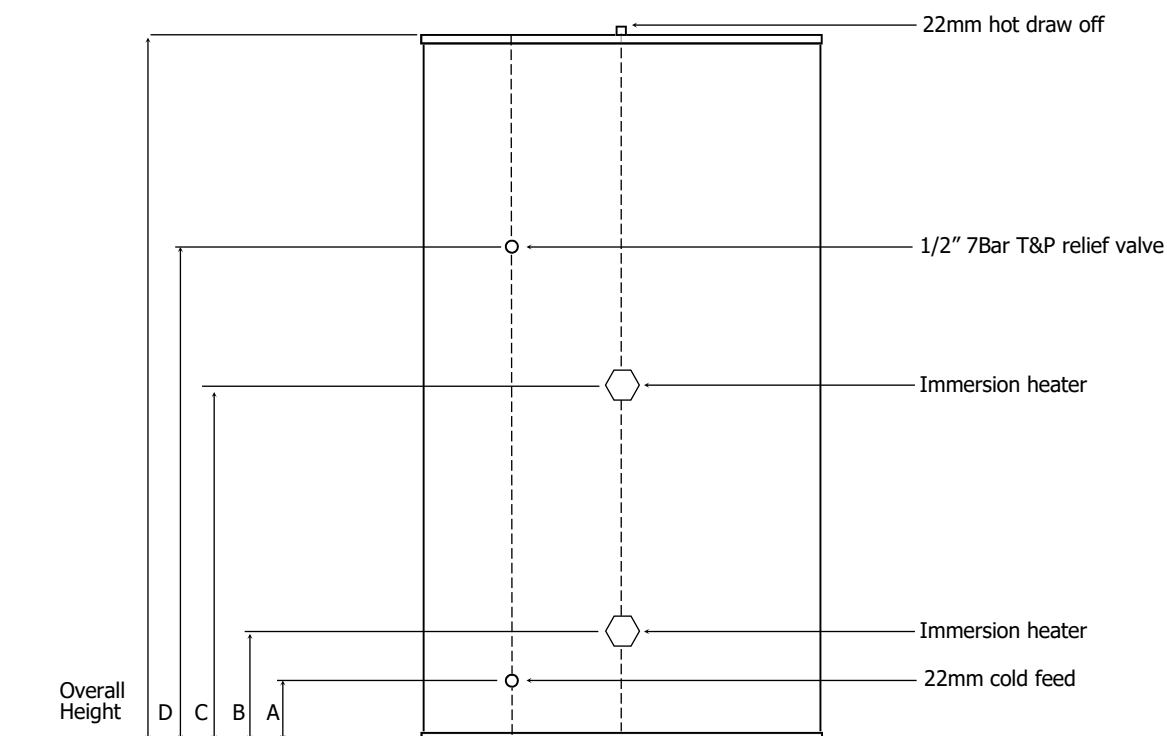

All unvented cylinders come with an unvented component kit to suit. Dimensions are subject to change without any prior notice.

Product Code	T2SD125/3.0	T2SD150/3.0	T2SD170/3.0	T2SD200/3.0	T2SD250/3.0	T2SD300/3.0
Nominal Capacity (L)	125	150	170	200	250	300
Height (mm)	1025	1260	1325	1550	1800	2050
Diameter Ø (mm)	580	580	580	580	580	580
A (mm)	171	171	171	171	171	171
B (mm)	201	201	201	201	201	201
C (mm)	411	620	601	621	621	621
D (mm)	651	858	813	1040	1268	1461
Empty Weight (kg)	33	36	40	44	53	59
Full Weight (kg)	154	185	208	238	299	353
Standing Heat Loss (kWh/24h)	1.17	1.24	1.27	1.53	1.68	1.87
Reheat time from 10°C to 60°C (Based on two 3Kw immersion heaters)	73	87	99	116	145	175
Actual capacity (L)	121	149	168	194	246	294
Standing loss (W)	68	77	82	77	83	92
Energy efficiency class of model	C	C	C	C	C	C
Operating Pressure (bar)	3	3	3	3	3	3
Immersion Heater Rating	2 X 3kw 240v	2 X 3kw 240v	2 X 3kw 240v	2 X 3kw 240v	2 X 3kw 240v	2 X 3kw 240v
Max incoming supply pressure (bar)	12	12	12	12	12	12

