



## 1880ECS1-25

25 PAIR - INDOOR BET - 710/110 - COVER & SPLICE CHAMBER

### Product Specifications


## UL497 Primary Protector for Communication Circuits

NAFTA Country of Origin: CANADA - All Models are "Buy America Act" Approved.

These 16 AWG steel building entrance terminals feature a 710 style connector for use in specialized OSP installations including military, healthcare and educational applications. Also included are multiple external and internal ground lugs as well as a splice chamber. UL Approval standard on all terminals. Standard 5-pin protector modules, available in gas tube and solid state versions, are sold separately. Call for more detailed information on RDUP/RUS-listed units.

## Features & Benefits

- 16 AWG Powder Coated Steel Construction
- Equipped with an Internal 26 AWG Fuse Link
- External Ground Connectors Accept 6 - 14 AWG Wire
- Industry Standard 5 Pin Design
- Exceeds UL497 Primary Protection Standards
- Stackable with Connection Grommets Included
- Input/output Connectors Accept 22 - 26 AWG Wire

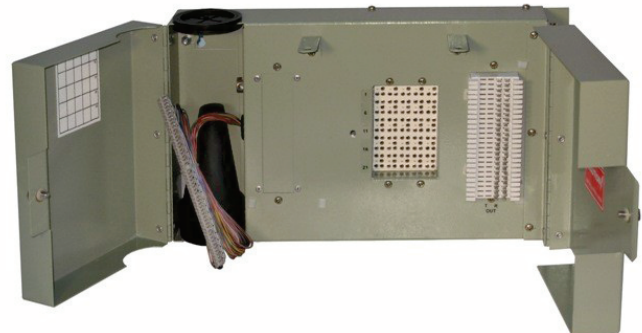

1880ECS1-25

### Ordering Information

Model Number	Stock Code	Pair Count	Input	Output	Dimensions (H" x W" x D")	Weight (lbs)
1880ECS1-25	305008	25	710	110	7.50 x 11.50 x 5.25	8

### 1880ECS1-25


25 PAIR - INDOOR BET - 710/110 - COVER & SPLICE CHAMBER



### Physical Dimensions

### UL497 Primary Protector for Communication Circuits

7.50 x 11.50 x 5.25  
(H" x W" x D")

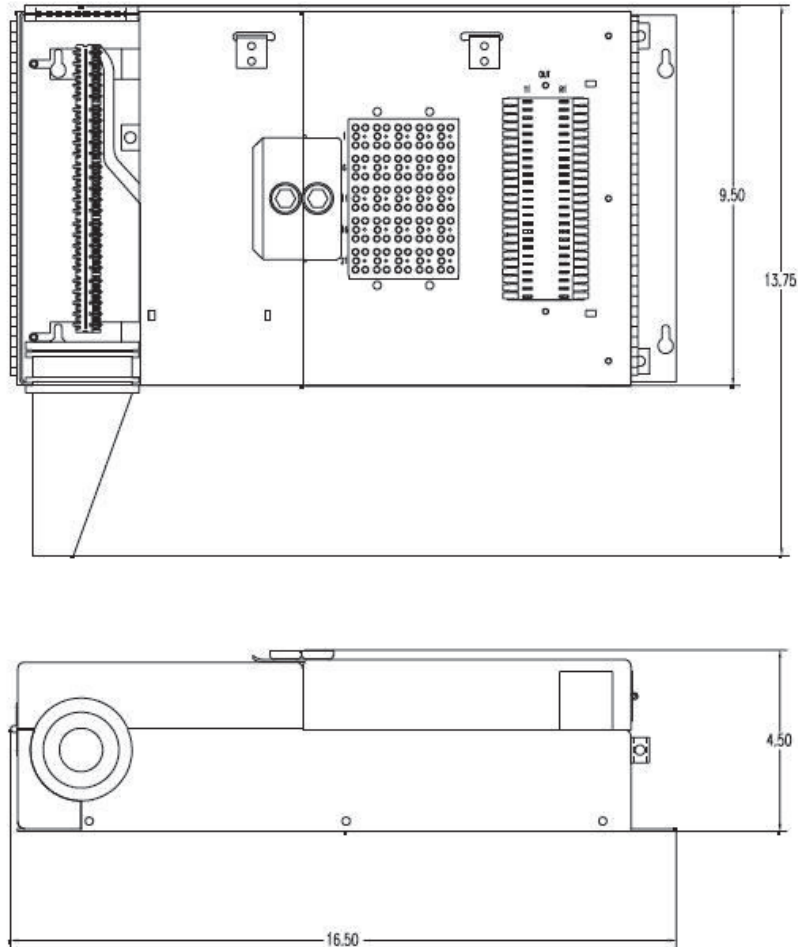

### Notes

#### Installation:

Indoor Wall Mount

710 Connector Input - 3.5' 24 AWG Cable Stub

Splice Chamber: Separate enclosure and cover for OPS gel filled Input cable  
RUS Approved Material - 2011 Edition RUS Publication 344-2 (Section 4.1.2 and 4.2)

Circa Telecom, Inc © 2013 - Version 1.03