


- ✓ Also model up to 7300psi available
- ✓ Maintenance free
- ✓ Quality stainless steel swivel
- ✓ Ready to use



TECHNICAL DATA

Pressure 4000 / 7300 psi
Temperature 250°F
Inlet 3/8" NPTF
 1/4" NPTM

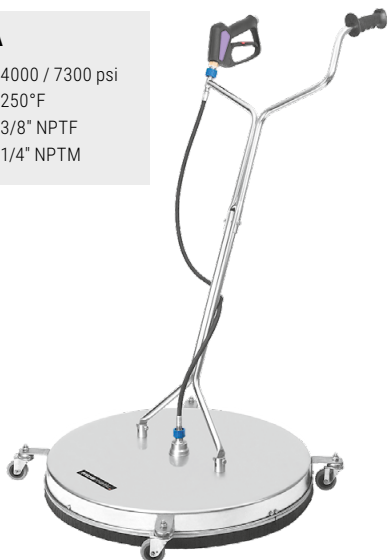

FL-CR 750



FL-CR 520

FL-CG 520

FEATURES

Rotor Arms

Can withstand up to 7300 psi, are precision welded and balanced.

2cw2 (2 Arms / 2 Nozzles)

Part No. 82.942 (ø18.5")

3cw3 (3 Arms / 3 Nozzles)

Part No. 82.943 (ø27.5")

2cp2 (2 Arms / 2 Nozzles)

Part No. 82.946 (ø18.5"), 1/8", 7300 psi

Optional: Part No. 82.941 (ø18.5"), 1/4", 7300 psi

Optional: Part No. 82.9069 (ø17.7"), 1/8", 7300 psi

3cp3 (3 Arms / 3 Nozzles)

Part No. 82.947 (ø27.5"), 1/8", 7300 psi

Stainless Steel Caster

Heavy duty ø2¼" casters with custom mounting brackets ensure easy manoeuvring even in confined spaces.



Stainless Steel Caster

Part No. 80.912

Swiss Engineering

High rpm stainless steel swivel features reinforced self lubricated stainless steel ball bearings for improved performance. The dual spring based carbide seal system, guarantees long lasting operation under tough conditions.



DYCI Swivel

Part No. 55.253

DYDI Swivel (7300 psi)

Part No. 55.263

Name	Part No.	ø	Weight	Swivel	Rotor Arm	HP- Nozzles	HP- Gun	Stainless Steel Caster
FL-CG 520	80.770	21"	22.7 lbs	1x DYCI	2x 1/8" NPTF	2x 1503	1x	--
FL-CR 520	80.771	21"	26.4 lbs	1x DYCI	2x 1/8" NPTF	2x 1503	1x	4x ø2¼"
FL-RY 520*	80.159	21"	25.4 lbs	1x DYDI	2x 1/8" NPTF	--	--	4x ø2¼"
FL-RY 750*	80.359	30"	29.8 lbs	1x DYDI	3x 1/8" NPTF	--	--	4x ø2¼"
FL-CR 750	80.772	30"	34.1 lbs	1x DYCI	3x 1/8" NPTF	3x 1503	1x	4x ø2¼"

* Pressure: 7300 psi / Inlet 1/4" NPTM